Choosing Sensible Signer Parameters

This document is a result of work by the Network Startup Resource Center (NSRC at http://www.nsrc.org). This document may be freely copied, modified, and otherwise re-used on the condition that any re-use acknowledge the NSRC as the original source.





What Parameters?

- We're talking here about technical parameters
 - keysizes, algorithms, rolloverschedules
 - authenticated denial of existence
 - signature validity periods
- We're not talking about key management policy





Key Algorithm

- What algorithm?
 - RSASHA1 is mandatory to implement in the validator
 - RSASHA256 is used in the root zone
 - hard to recommend alternatives, unless there are layer-9 reasons not to use RSA
 - both RSASHA1 and RSASHA256 are reasonable choices





Key Sizes

- Common wisdom suggests that 1024 bit RSA ZSK keys are safe to use for the next 5 years
 - KSKs may use longer keys, but it isn't strictly proven to be necessary
 - ZSKs are easier to roll than KSKs
 - KSKs are exercised less frequently than ZSKs
 - KSKs are harder to roll, since they involve parents



ZSK Rollover

- ZSK rollover can be automated, so it's not painful to do
- Replacing keys provides an opportunity to reset your documentation trail and key management processes
- Silly to roll the ZSK too frequently, but doing it a few times a year seems prudent





KSK Rollover

- Rolling a KSK will invariably involve manual interaction with a parent zone
- You might consider that given the cost of the operation you might only plan to roll your KSK when you need to (i.e. when there is a suspicion of compromise)
- Remember however that operational procedures are difficult if you don't practice them





Non-Existence

- NSEC is simpler to understand than NSEC3, and hence easier to troubleshoot
 - but more overhead than NSEC3 with opt-out
 - NSEC facilitates zone-walking
- NSEC3 with opt-out may be the best option for large zones and zones with privacy concerns





Signing Parameters

- Every RRSIG is a ticking time bomb!
 - choose your parameters wisely
- The parameters described in the slides which follow are based on elements in the OpenDNSSEC KASP





Resign Interval

- The interval between successive runs of the OpenDNSSEC signer engine
 - it is generally not harmful to run the signer engine fairly frequently
 - signatures can be re-used in many cases





Signature Refresh

- Signature Refresh is the minimum remaining validity of any signature in your zone
- How much time do you estimate would be needed to recover from a catastrophic failure in your signer infrastructure?
 - double it, add some more
- Think: risk management & analysis





Signature Validity

- Signatures remain valid for use by a cache until they expire
 - a stolen signature can be used as an attack vector
 - the maximum validity period is hence the window of opportunity for such an attack
 - longer than the refresh interval





Jitter

- You can spread your signing load more evenly by applying jitter to signature inception and expiration times
 - times will be shifted by a random amount within +/- the value specified
 - ensure that the worst-case jitter does not present operational risks





Inception Offset


- It's prudent to specify a signature inception time which is in the past
 - even if your clocks are accurate, validators run by others might not be
 - the window of opportunity to exploit a signature in the past is, well, past





Signature Lifetime

Signature lifetime

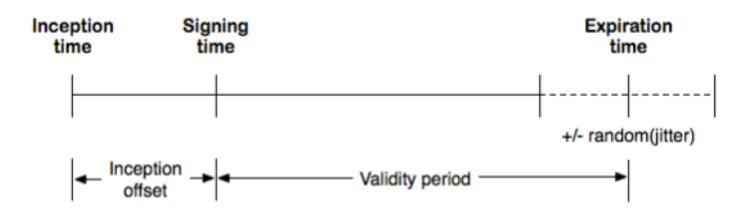






Re-Use of Signatures

Reuse of signatures

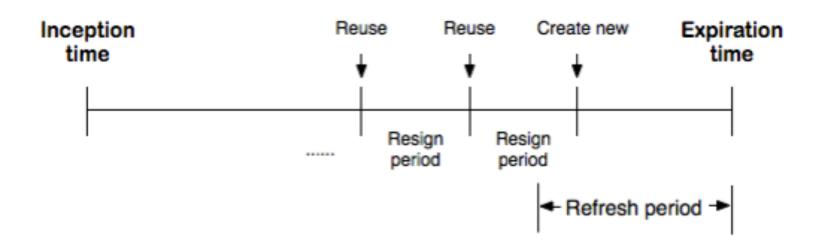





TTL Parameters

- The DNSKEY RRSet TTL determines how long your keys might be cached elsewhere, and is relevant for rollover scheduling
- The SOA RRSet TTL determines (with the MINIMUM field) the negative cache TTL, and since OpenDNSSEC generates the SOA, we need to specify both in the KASP





Further Reading

- http://trac.opendnssec.org/wiki/Signer/ Using/Configuration/kasp
- http://tools.ietf.org/html/draft-ietf-dnsopdnssec-key-timing-02



