DNS Operations

Advanced DNS Operations & Security



Goals

- Go beyond basic DNS administration, focus on service stability
- Identify common operational problems that plague authoritative nameserver administrators
- Identify pitfalls and errors to avoid when changing zones
- Define proper architectures
- Improve availability and reduce the chance of a breakdown of service using active monitoring

Overview

- Tools
 - using dig and interpreting the results
 - doc, dnstop
- Gotchas and common debugging problems
 - RFC1912, 2182, 2870
 - delegation and glue, keeping it up to date
 - inconsistent delegation between parent and child
 - cache effects
 - TTL policy

Overview

- Operations
 - logging using BIND channels
 - monitoring services and zone exports
 - active delegation checking
 - distributed hosting considerations
 - scripting and automation

- dig is the domain information groper.
- dig is used to query nameservers for information, usually for debugging purposes.
- dig gives you information, and can perfom queries, that most other tools usually used (nslookup, host) don't give you
- dig's output can be confusing the first time one sees it...

```
$ dig ns nsrc.org.
; <<>> DiG 9.4.1-P1 <<>> ns nsrc.org
;; global options: printcmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 40659
;; flags: qr rd ra; QUERY: 1, ANSWER: 2, AUTHORITY: 0, ADDITIONAL: 2
;; QUESTION SECTION:
                        NS
;nsrc.org.
                   IN
;; ANSWER SECTION:
nsrc.org.
              132391
                             NS ARIZONA.EDU.
                        IN
              132391
                             NS RIP.PSG.COM.
nsrc.org.
                        IN
;; ADDITIONAL SECTION:
ARIZONA.EDU.
                   104458
                                      128.196.128.233
                             IN
                                 Α
                                      147.28.0.39
RIP.PSG.COM.
                   89057
                             IN A
;; Query time: 60 msec
;; SERVER: 212.38.128.2#53(212.38.128.2)
;; WHEN: Tue Nov 27 02:58:37 2007
;; MSG SIZE rcvd: 108
```

- Pay particular attention to the flags and the answer section
- Use dig at the authority of the parent and child zones to control proper delegation
- Do the informations match ?
- Example for cctld.eu.org
 - Identify nameservers for EU.org

```
dig ns eu.org.
```

```
;; ANSWER SECTION:
                                   ns0.pasteur.fr.
eu.org.
                  23772
                           IN
                               NS
                 23772
eu.org.
                           TN
                               NS
                                   ns.eu.org.
                                   ns-slave.free.org.
eu.org.
                 23772
                           IN
                               NS
eu.org.
                 23772
                               NS
                                   dns3.gandi.net.
                           TN
                                   auth1.dns.elm.net.
                 23772
                           TN
                               NS
eu.org.
                 23772
                                   relay-1.ftel.co.uk.
eu.org.
                           IN
                               NS
                 23772
                           IN
                                   ns1.pasteur.fr.
eu.org.
                               NS
```

 Ask one of the servers for the NS records for cctld.eu.org

dig @ns.eu.org NS cctld.eu.org.

```
;; AUTHORITY SECTION:
cctld.eu.org.
                    259200
                                NS
                                     NS1.CATPIPE.NET.
                             TN
               259200
cctld.eu.org.
                                NS
                                     NS2 CATPIPE NET.
                            TN
cctld.eu.org.
               259200
                                    NS1.cctld.eu.org.
                                NS
                            IN
```

- Notice the flags for the query, and the way the answers are presented
- Control that the servers for cctld.eu.org return the same information:

```
dig @ns1.cctld.eu.org NS cctld.eu.org. dig @x0.dk NS cctld.eu.org.
```

• What do you notice ?

Tools - doc

- Checking delegations manually is error-prone and tiresome
- A tool to automatize this particular check exists: doc
- Doc can be installed as a port/package
- Usage:

```
doc [-p] domain.name
```

Tools - doc

• Try using doc — it should be installed.

```
doc -p cctld.eu.org
```

Gotchas and common debugging problems

- Logging is the single most useful tool for troubleshooting a running nameserver — we'll see later how to set it up
- Check out RFC1912, 2182 and 2870
- Lame delegations and glue problems can be easy to overlook if the wrong tools are used
- Caching makes this more complicated problems might appear later.
- Pick a reasonable TTL policy

Gotchas and common debugging problems: caching

- Cache effects
 - Changes can take a while to propagate plan accordingly
- TTL and SOA policy
 - RIPE has a document for recommended SOA values:

ftp://ftp.ripe.net/ripe/docs/ripe-203.pdf

```
example.com. 3600 SOA dns.example.com. admin.example.com. (
1999022301 ; serial YYYYMMDDnn
86400 ; refresh ( 24 hours)
7200 ; retry ( 2 hours)
3600000 ; expire (1000 hours)
172800 ) ; neg ttl ( 2 days)
```

Gotchas and common debugging problems: caching

- It's common to misinterpret/forget the negative value of the SOA
- "negative" means "how long can remember that the record for this query does NOT exist"

Operations

- remember to turn off recursion!
- logging
- monitoring service (availability and data)
- active delegation checking
- hosting and architecture considerations

Logging

- Using BIND channels, categories and severities (chap 7.5 of DNS & Bind)
 - The idea is to define channels (file, syslog, ...) and the assign categories to these channels:

```
logging {
   channel transfers {
      file "log/transfers" versions 5 size 100M;
      print-time yes;
   };
   category xfer-out {
      transfers;
   };
   category default {
      default_syslog;
      default_debug;
   };
};
```

Logging

- Categories of interest:
 - default
 - a good set of defaults send it to your syslog
 - lame-servers
 - bad delegation
 - load
 - zone loading events
 - notify
 - zone change notifications
 - queries
 - logging of queries can be huge!
 - response-checks
 - badly formed answerd, additional information, ...
 - xfer-in / xfer-out
 - events for incoming / outgoing zone transfers

Logging

 Add logging to /etc/namedb/named.conf, and restart named

```
# rndc reconfig
```

 Do a zone transfer for a zone from one of your neighbors:

```
# dig @ns.of.neighbor axfr zone.name
```

Look at /etc/namedb/log/transfers

```
# more /etc/namedb/log/transfers
```

Monitoring - services

- Monitoring services why ?
 - make sure that your nameserver is answering correct data, in a timely manner
 - monitor secondaries
 - monitor infrastructure to deliver DNS service (network, servers, ...)
- Tools useful for monitoring:
 - echoping check service latency and availability
 - SmokePing graph of reponse times
 - Nagios service and server monitoring
 - ... many others

Monitoring – zone exports

- Monitoring zone export why ?
 - Avoid publishing incorrect information
 - Avoid publishing incomplete information (truncated zone)
 - Avoid disappearance of your zone! (undetected errors + expire of zone)
- Checks
 - zone change controls before AND after publicationnamed-checkzone
 - use EOD markers (data that your export script adds to the zone at the end of your zone export job
 • zonevalid


"exported at 20071126 09:54" TXT

Monitoring – zone exports

- Undetected errors
 - zone fails to load (invalid syntax or inconsistent — CNAME and other data for example)
 - no one notices
 - 2-4 weeks later, the zone expires on the secondaries
 - the zone has disappeared
 - difficult to correlate the problem with the exact cause (unless one has logs)
- Note that if "rndc reload" is used, BIND will keep the old zone in memory if the new one fails validation

Monitoring - baseline

- Get to know your system
- Using tools such as dnstop, tcpdump, MRTG, establish a baseline for your platform when it is functioning normally
- Identify
 - average queries per second
 - memory usage for named

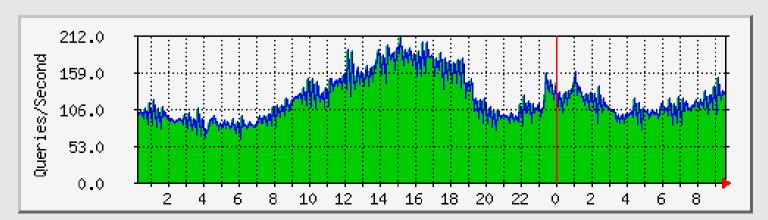

Monitoring - baseline

 Useful for capacity planning for future growth, and for handling attacks

Delegation checking

- Mostly a policy decision
- Proactive or reactive ?
 - check regularly every delegation
 - or check only when delegation changes
- But there are advantages
 - avoid to field problem reports that are Not Your Problem ("domain XYZ doesn't work!")
- Some TLDs have a "Name server registration" procedure.

Secondary considerations

- If you're not already doing it, then make sure your SOA server is a hidden master, not accessible from the rest of the network
- None of your public servers should serve any data that is unique/irreplaceable.
- Normally, all public servers are secondaries (but there are other methods, including secure copy)

Scripting and automation

- You should be try and be familiar with at least one scripting language (Shell, Perl, Python, ...)
- Automate as much as you can
- Run tools like doc, dig to control delegations for critical zones

Questions?

