

Sensors

Jonathan Brewer
Network Startup Resource Center
jon@nsrc.org



These materials are licensed under the Creative Commons Attribution-NonCommercial 4.0 International license (<http://creativecommons.org/licenses/by-nc/4.0/>)



We might spend an hour talking about sensors. Why? They are the most interesting part of the Internet of Things. They translate the world into digital signals that can be understood and acted on by computers. They're the basis of everything we'll talk about in relation to the Internet of Things.

I built this talk by visiting a few popular web stores, and just browsing through their low-cost offerings. Most of these sensors are between five and ten Euros each, with only a few exceeding 20 Euros.

Sensors: Considerations

- Analog or Digital
- RS232, RS485, I2C, SPI, CAN, USB
- Accuracy typically varies with price
- Some need warm-up, others need calibration
- Power requirements vary widely
- Wrong data can be worse than no data at all!

Basic digital output means the sensor provides voltage or it doesn't, while analog output provides variable voltage to indicate variable readings. A number of serial interfaces are supported by IoT sensors and technologies, with I2C being a popular, low-cost bus topology. Some high end sensors have the ability to connect over more than one digital or serial method.

Accelerometer



Measures acceleration in multiple axis.

On a person or animal, an accelerometer can help to track motion for health.


I actually wear an armband that has an accelerometer, along with a few other sensors. It helps to remind me to get enough exercise.

Air Quality Sensor



Air quality sensors typically look for a few different things: carbon monoxide, alcohol, acetone, formaldehyde. A generic, inexpensive device might give you a warning that something is wrong, but not necessarily what is wrong.

Alcohol Sensor

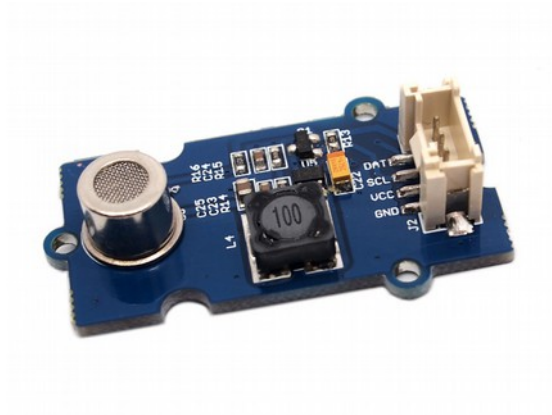

This five-euro sensor can be used to test breath alcohol. It could be used to provide an inexpensive interlock on a machine, a car or a tractor that shouldn't be operated by someone who has been drinking.

Barometric Pressure



The most obvious use for a barometer pressure sensor is for weather monitoring. A change in reading from a stationary barometer can mean that the weather is going to change.

I think the most common use for barometers today though is in smartphones. They use barometers in a mobile application to determine a device's height above sea level. Combined with details from a GPS and from a cellular network, a barometer can help a phone get very accurate positioning information.

Camera



We all know what cameras are good for. I'll just use mine right now. (and now for a selfie). In the world of the Internet of things a camera can do more than just take selfies. Coupled with a Raspberry Pi and some free, open source software called OpenCV, a camera like this can be used for face recognition.

Collision Sensor



Much of the popularity of small microprocessors like the Arduino is a result of people's fascination with robots. This very rudimentary collision sensor allows a moving device (hopefully moving very slowly) to know when it's hit something else - maybe a wall, another robot, or a shoe.

Colour Sensor



Colour sensors are a bit more interesting to me than cameras. I think this one senses red, green, blue, and brightness, and reports back an intensity. You could point one at a machine that has red and green lights, to easily know the state of the machine. You could also use one with a conveyor belt to check or record the ripeness of some fruit or vegetables.

Compass: Digital



Which way is North? This is a very easy to understand sensor that is important to anything mobile.


Formaldehyde Sensor



Formaldehyde is used in the manufacture of fabrics, wood products, tissue products, insulation, and thousands of other products. It can be used as a disinfectant as it kills fungus and bacteria. It can be emitted from many manufactured products when they're heated or burned. It's also toxic!

Detecting formaldehyde concentrations and other indoor air pollutants in a factory or workshop is a good way to ensure the health and safety of workers.


Galvanic Skin Response

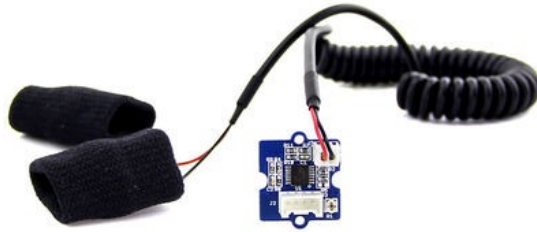

Galvanic Skin Response measures the conductivity of skin, which can change depending on how active a person's sweat glands are.

Physical and Psychological stress makes glands more active and this lowers the skin's electrical resistance. My armband - the one with the accelerometer in it, also tracks galvanic skin response.

Gas Sensor

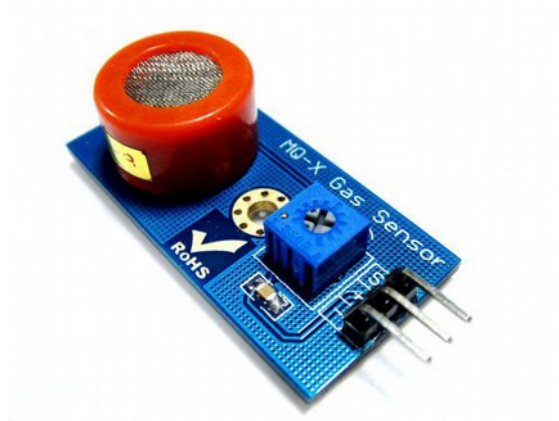

Gas sensors come in a number of different versions, Methane, Butane, LPG, Alcohol, Ethanol, Carbon Monoxide, Hydrogen, Ozone, Benzene, Hydrogen Sulfide, Ammonia... the list goes on. Inexpensive sensors will output a voltage that varies with the concentration of the target gas. As with the formaldehyde sensor, these gas sensors can be important for indoor health and safety in labs, workshops, and manufacturing facilities.

Global Positioning System



GPS can be used to find where we are on earth. Modern GPS receivers can pick up signals from the original US owned satellites, from Russia's GLONASS, and in the future from similar European, Chinese, and Indian systems. GPS is also useful in that it provides accurate time. Very, very accurate time, anywhere in the world. If you need to accurately synchronise devices in different places, like flashing safety lights, telecommunications transmissions, or logging of time sensitive data, a GPS based clock is the way to do it.

Electrical Current Sensor



This sensor allows you to pass a wire through it to monitor the current flowing through the wire. You might use it as an electricity meter, or you could use it to keep track of when an automated pump, fan, or light was running.

Flow Sensor




This flow sensor uses a hall effect to measure how fast a liquid or gas is moving through a pipe, and to record the volume of liquid or gas that has passed through in a particular time interval.

Flow Switch



A flow switch protrudes into the middle of a pipe. It can be set up to turn a device on or off depending on whether a liquid or gas is flowing or not.


Force Sensitive Resistor



As you press on the surface of a force sensitive resistor, resistance through the circuit goes down.

It can be used as a robust, non-mechanical button or touch sensor, or as a very thin but not very accurate device for determining the weight of small load that has been placed on top of it, maybe up to half a kilo.


Gyroscope

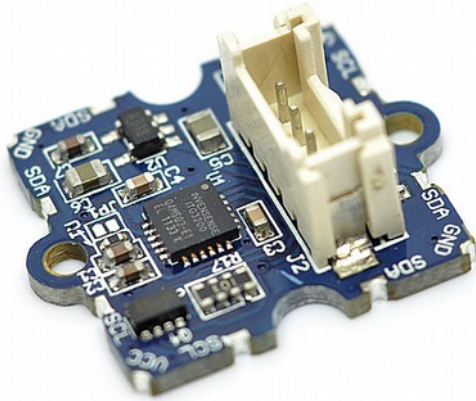

A gyroscope measures orientation in multiple axis.

It helps you know which way is up, for example if a device has fallen over.


Hall Sensor

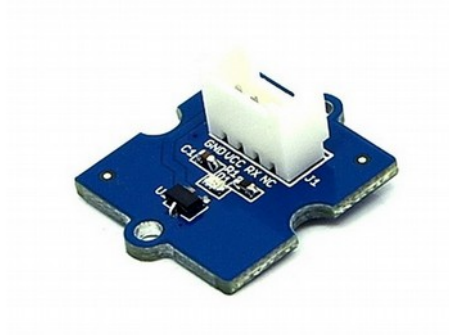

Measures magnetic field


Detect distance from a target

Humidity Sensor

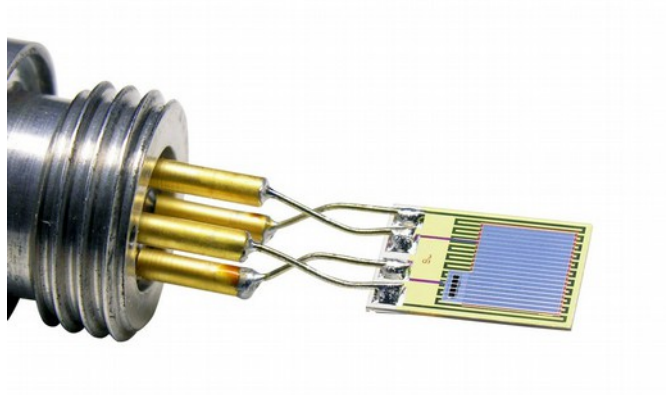

Measures the relative humidity of the air.

Infrared Reflection

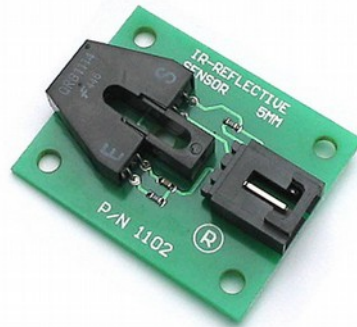


This sensor generates infrared light and measures its reflected strength. One of its applications is to determine distance. Infrared reflection sensing is also used to help robots follow lines, and in optical dust sensors.

Infrared Sensor: Passive



A passive infrared sensor allows non-contact sensing of temperature. Point it at an object and you can take its temperature. When configured appropriately, it can be used as a motion sensor.

Light Sensor

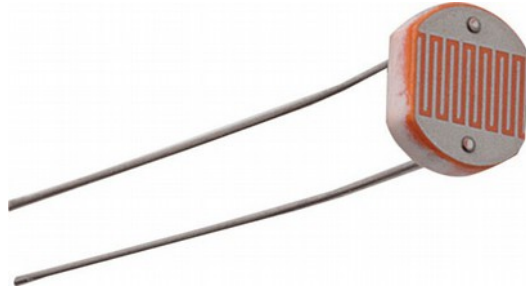

A light sensor, or a light dependent resistor, is a very inexpensive but relatively inaccurate device that will tell you if it's light or dark.

Load Sensor



A load sensor, or load cell, converts force into electrical output. This one is good for measuring weights up to 50 kilograms, but all sizes are available.

Loudness Sensor




A loudness sensor uses a microphone, an amplifier, and filters to output a digital signal that can be translated into a measurement of the decibel level of sound.

Microphone




While Internet of Things microprocessors aren't typically fast enough to process audio from a microphone, other small platforms like Raspberry Pi are, and can analyse sound from a microphone in real time.

Moisture Sensor



Moisture sensors measure the dielectric constant of soil, or its ability to transmit electricity, and derive an amount of moisture in a particular volume of soil. They can range from inexpensive and inaccurate for a cheap sensor stuck in a pot plant, to expensive and very accurate when properly installed and calibrated to the type of soil they're embedded in.

Moisture Sensor Chip (Cornell)



The moisture chip from Cornell, reported just in the last few months, promises to change soil moisture sensing for the better. Instead of measuring electrical conductivity, it measures the pressure on a semi-permeable membrane. It's so small it can be inserted into the stem of a plant, and is expected to be far more accurate and far less expensive than traditional sensors.

Optical Dust Sensor




An infrared transmitter and receiver that measures reflections from dust and particulate matter in the air inside a small chamber.

Photo Interruptor




A photo interruptor has a light emitter and a light receiver in-line. When something comes between them, a pulse is generated. It can be used to count things or switch things.

Pressure Sensor (MEMS)

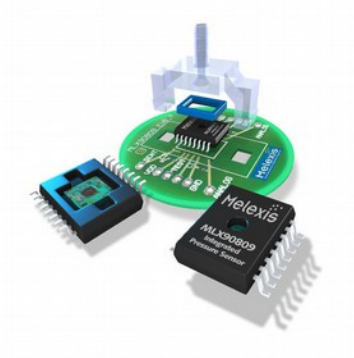

Micro Electrical Mechanical Pressure Sensor - a little machine made of silicon for very precisely measuring pressure.

Real Time Clock

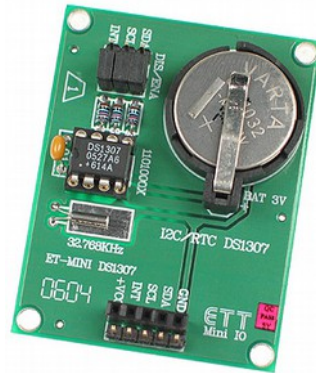

A real-time clock is an accurate clock that's not a part of the main system of a computer, but operates on its own, and has its own power supply. Some chips have programmable functionality, allowing you to not just keep time but turn things on and off per a calendar or schedule.

Reed Switch




A Reed switch is a glass tube with two wires. A magnet will bring the wires together, causing the circuit to be connected. Some applications that use Hall effect to count revolutions of a wheel could use a Reed switch instead.

Solar Radiation Sensor



More than just a light dependent resistor, a solar radiation sensor provides intensity as a digital output. It can be used in agriculture to record the amount of sunlight that crops have had, or in solar power applications to check the efficiency of installed solar systems.

Temperature Sensor

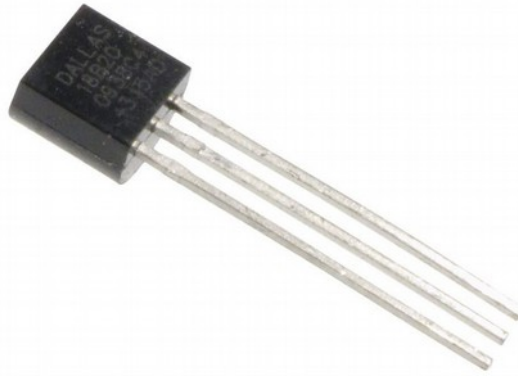

Temperature sensors range in cost and accuracy, but are almost always inexpensive and easy to use. They're so inexpensive, they are often integrated into other sensors and circuit boards. This model uses a 1-wire communications bus, with each device having a 64-bit serial number. Many sensors can be chained together to produce high resolution data.

Thermistor




The thermistor varies resistance depending on its temperature.

Touch Sensor: Capacitive



Capacitive Touch Sensors detect when they are touched by a conductive surface, such as a finger.

Vibration Sensor

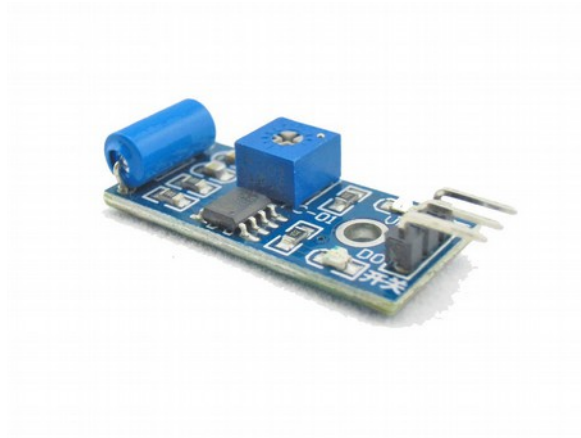

Some vibration sensors are based on piezoelectric devices, and generate voltage in response to being vibrated. Any movement can activate a sensor, the signal from which could be used to wake up a microprocessor and other sensors or actuators.

Ultrasonic Range Finder



Ultrasonic Range Finders are used to measure distance. An ultrasonic ping is sent from the device, which then listens for the ping to come back, and uses the delay between sending and receiving to calculate the distance of an object. The company I'm working for now is using these ultrasonic sensors to measure the amount of water in water tanks.



Tracking ultraviolet radiation can be useful in evaluating inputs in agriculture. Ten years ago in New Zealand it was important to track UV for skin safety reasons - because of a hole in the ozone layers we had very high uv radiation and it was very easy to get a sunburn because of it.

Actuators

Actuators are things that do things!

Actuators: Considerations

- Power Use: Voltage and Amperage
- Interface
- Accuracy (and Cost!)
- Availability
- Documentation, Support & Community Involvement

Actuators: Considerations

- Power Use: Voltage and Amperage
- Interface
- Accuracy (and Cost!)
- Availability
- Documentation, Support & Community Involvement


Buzzer



Relays act as a switch for current. This one has three ports: com means common, and is involved in all circuits through the relay. NO means normally open, and NC means normally closed.

A signal passing into common will pass through the NC port unless the relay is switched on, at which point it will pass through the NO port. Relays are just about the easiest actuators for Arduino - easier even than LEDs. As a bonus they make a satisfying click when you turn them on and off.


Light Emitting Diodes

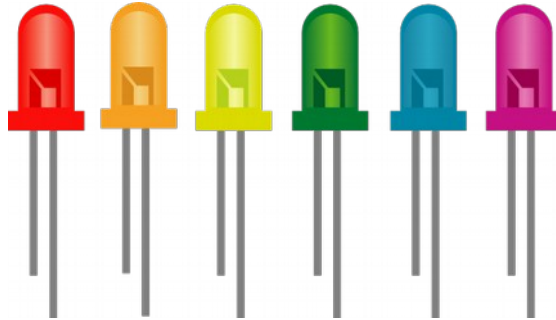

We all know what LEDs do. Give them a bit of voltage and they light up.

What's more interesting is that beyond the basic visible colours, infrared and ultraviolet LEDs are available too.

Relay

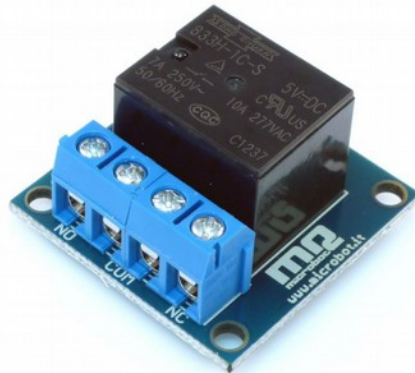

Relays act as a switch for current. This one has three ports: com means common, and is involved in all circuits through the relay. NO means normally open, and NC means normally closed.

A signal passing into common will pass through the NC port unless the relay is switched on, at which point it will pass through the NO port. Relays are just about the easiest actuators for Arduino - easier even than LEDs. As a bonus they make a satisfying click when you turn them on and off.

Servo



This servo takes DC power and a digital signal from a computer like an Arduino. Send it directions to turn to an arbitrary position like 274 degrees and it'll do it. Servos like this one are commonly used to steer robots and controlled or autonomous vehicles.

Solenoid



This solenoid is a specially designed electromagnet. The piston in the middle is normally in the out position. When current flows through the solenoid, the piston pulls in. This action could open a valve, activate a mechanical switch, ring a bell, or do anything you could think of.

Transistor



Transistors are used for amplifying or switching electronic signals or power. While a relay can just switch things in two directions, a transistor can help an Arduino provide granular levels of power to a device like a fan or a motor, without passing high power current through the Arduino itself.