

Campus Network Best Practices: Core and Edge Networks

Dale Smith
Network Startup Resource Center
dsmith@nsrc.org

This document is a result of work by the Network Startup Resource Center (NSRC at <http://www.nsrc.org>). This document may be freely copied, modified, and otherwise re-used on the condition that any re-use acknowledge the NSRC as the original source.



UNIVERSITY OF OREGON



Campus Network Challenges

- Many are not structured properly and can't effectively utilize high bandwidth connections
- Many make heavy use of NAT and firewalls that limit performance
- Many are built with unmanaged network equipment that provide no ability for monitoring or tuning the network



UNIVERSITY OF OREGON



How to Best Support R & E

- Research and Education needs flexible and open networks
- Things to consider
 - NAT makes some things hard (H.323 video conferencing)
 - Filtering makes it hard for researchers, teachers, and students to do interesting things
 - Your campus network must not be the bottleneck
- Make a plan for improvement – without a plan, how will you get there.



UNIVERSITY OF OREGON



Campus Network Rules

- Minimize number of network devices in any path
- Use standard solutions for common situations
- Build Separate Core and Edge Networks
- Provide services near the core
- Separate border routers from core
- Provide opportunities to firewall and shape network traffic



UNIVERSITY OF OREGON



Core versus Edge

- Core network is the “core” of your network
 - Needs to have reliable power and air conditioning
 - May have multiple cores
 - Always route in the core
- Edge is toward the edges of your network
 - Provide service inside of individual buildings to individual computers
 - Always switch at the edge




UNIVERSITY OF OREGON




Minimize Number of Network Devices in the Path

- Build star networks

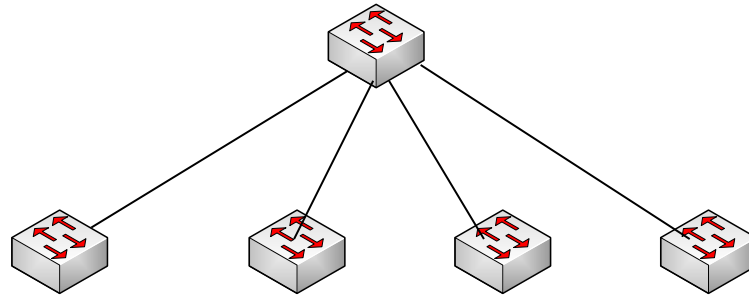

- Not daisy chained networks

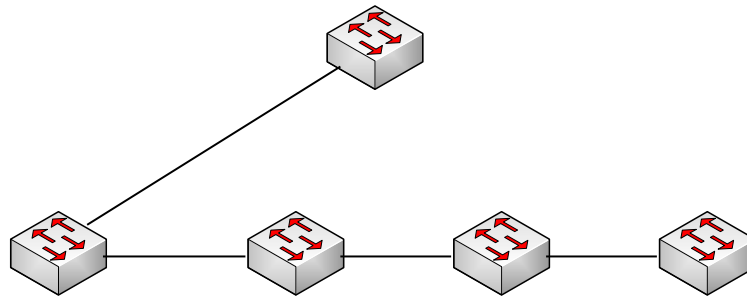

UNIVERSITY OF OREGON

Edge Networks (Layer 2 LANs)

- Provides Service to end users
- Each of these networks will be an IP subnet
- Plan for no more than 250 Computers at maximum
- Should be one of these for every reasonable sized building
- This network should only be switched
- Always buy switches that are managed – no unmanaged switches!




UNIVERSITY OF OREGON



Edge Networks

- Make every network look like this:

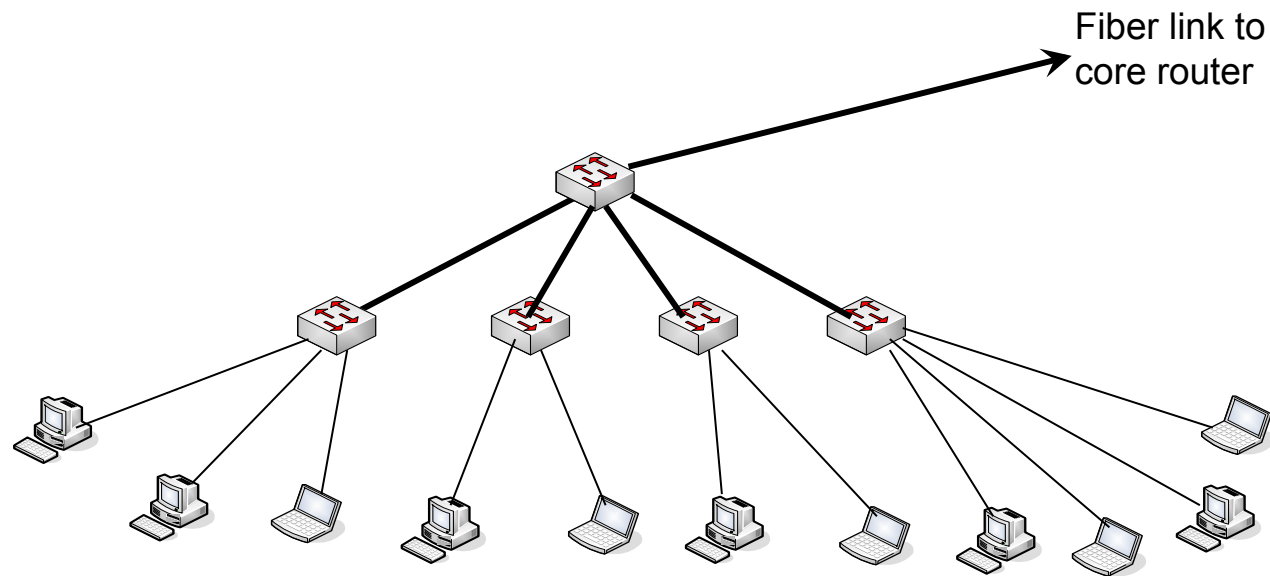


UNIVERSITY OF OREGON



Edge Networks Continued

- Build Edge network incrementally as you have demand and money
- Start Small:

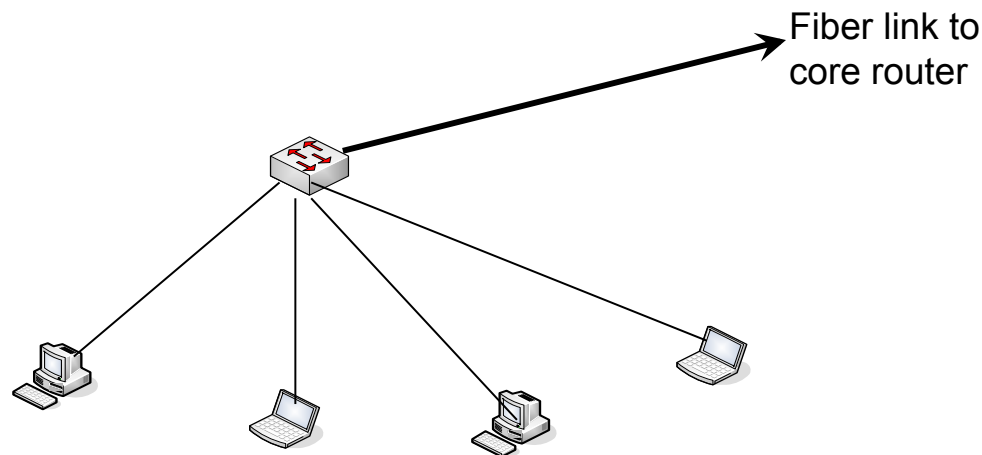


UNIVERSITY OF OREGON



Edge Networks Continued

- Then as you need to add machines to the network, add a switch to get this:

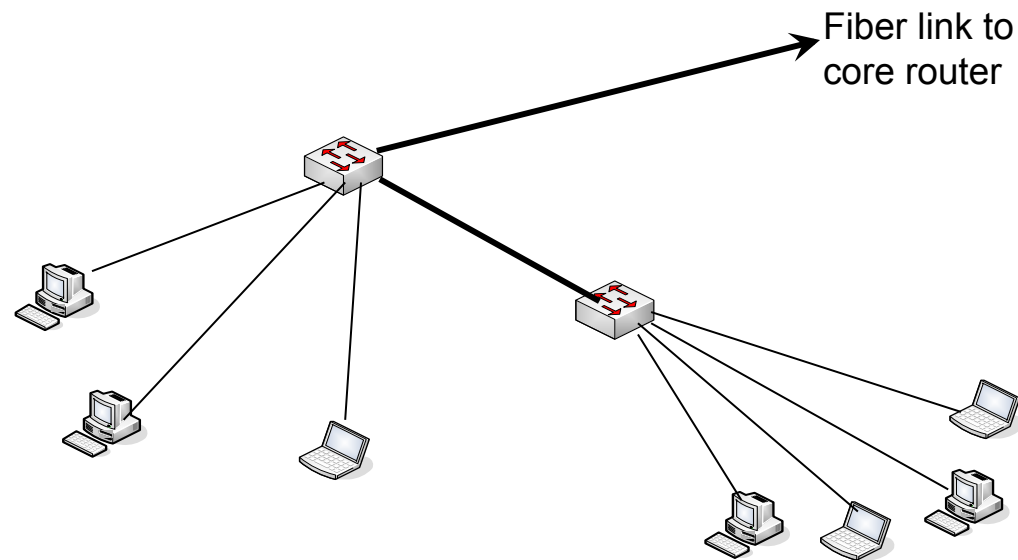


UNIVERSITY OF OREGON



Edge Networks Continued

- And keep adding switches to get to the final configuration

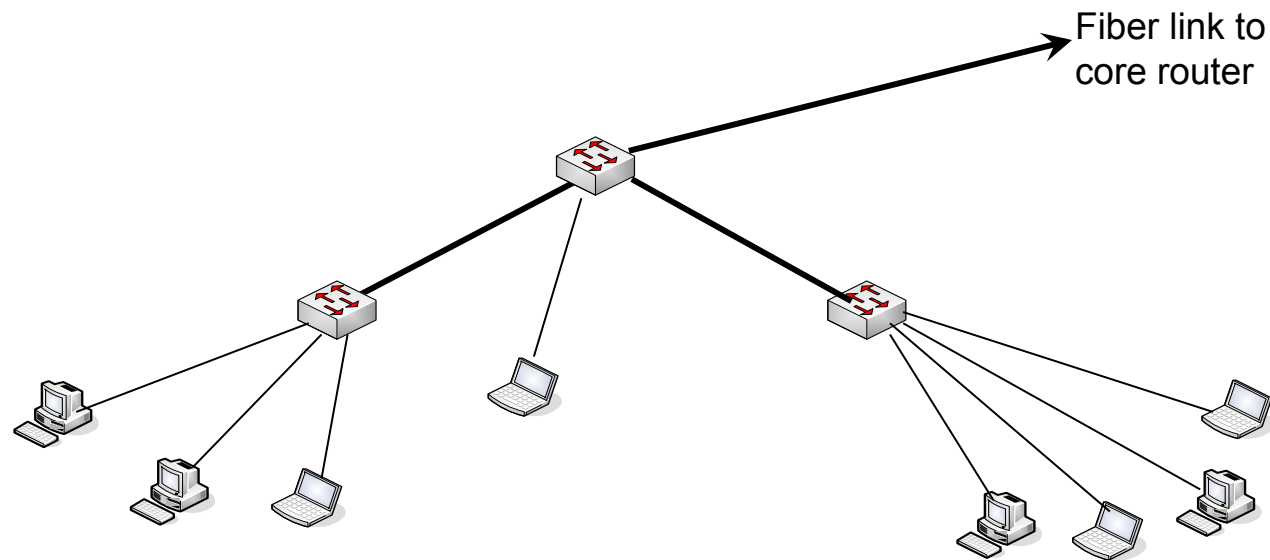


UNIVERSITY OF OREGON



Edge Networks Continued


- And keep adding switches to get to the final configuration

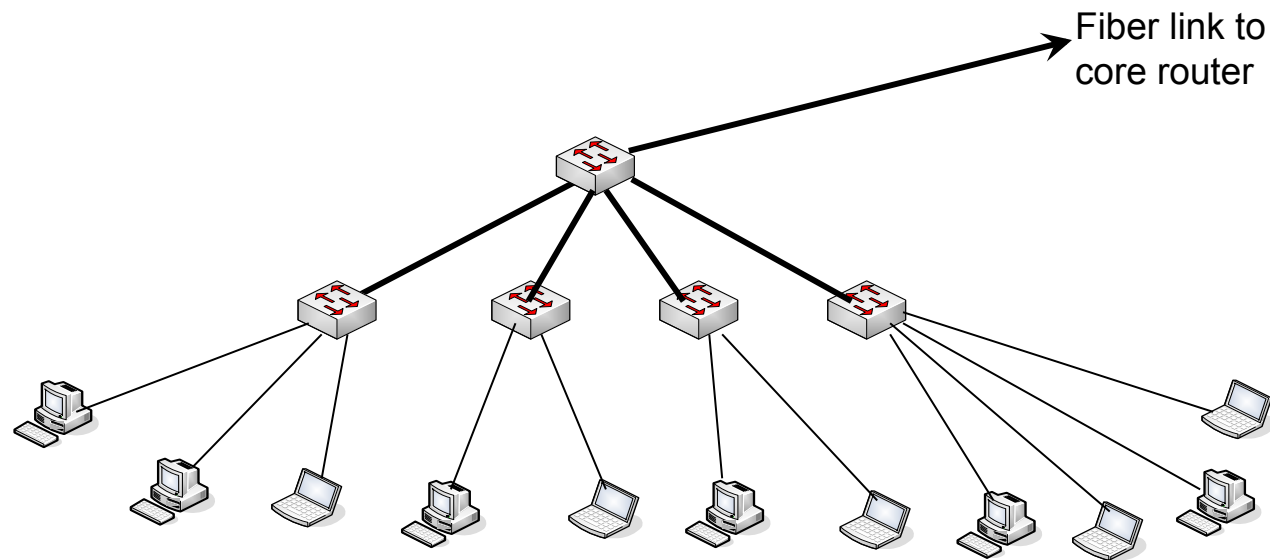

UNIVERSITY OF OREGON

Edge Networks Continued


- Resist the urge to save money by breaking this model and daisy chaining networks or buildings together
- Try hard not to do this:

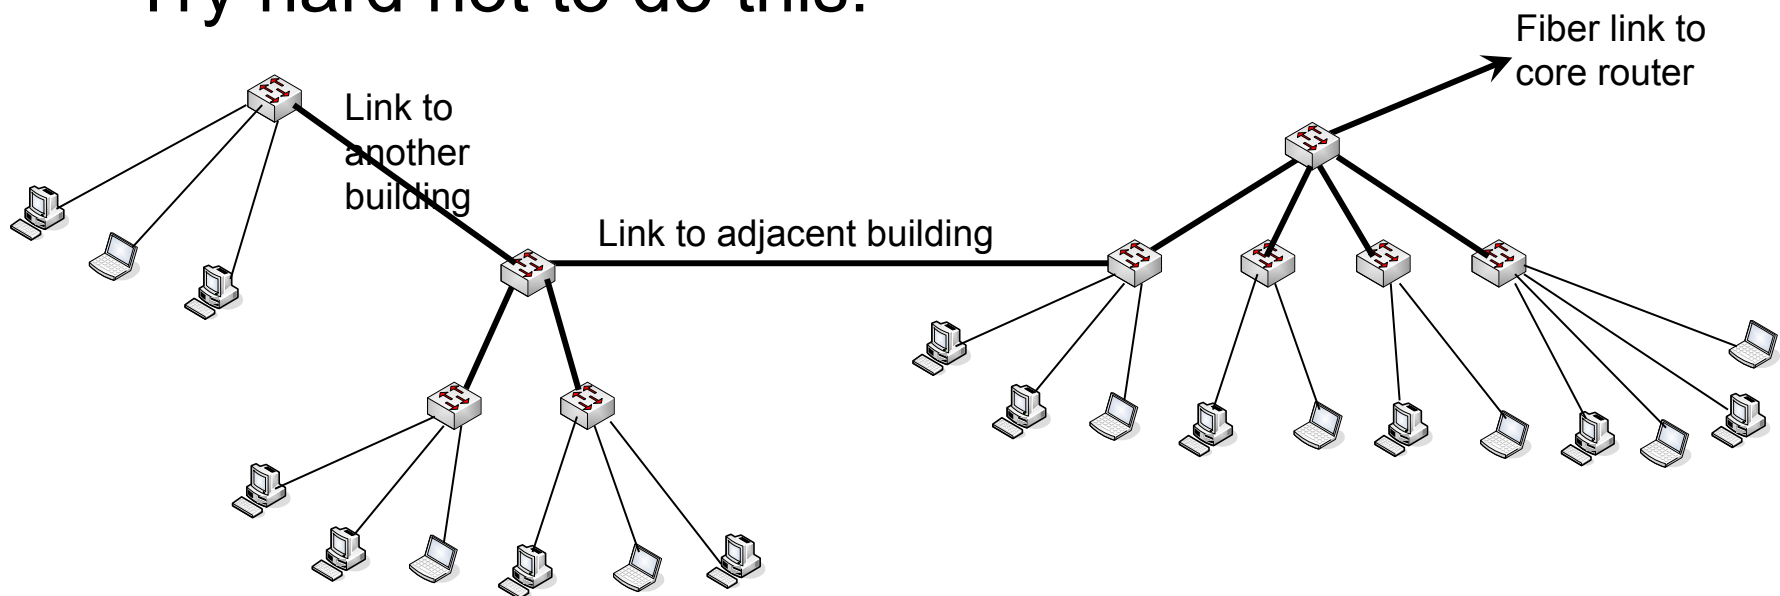

UNIVERSITY OF OREGON

Edge Networks Continued

- There are cases where you can serve multiple small buildings with one subnet.
- Do it carefully.

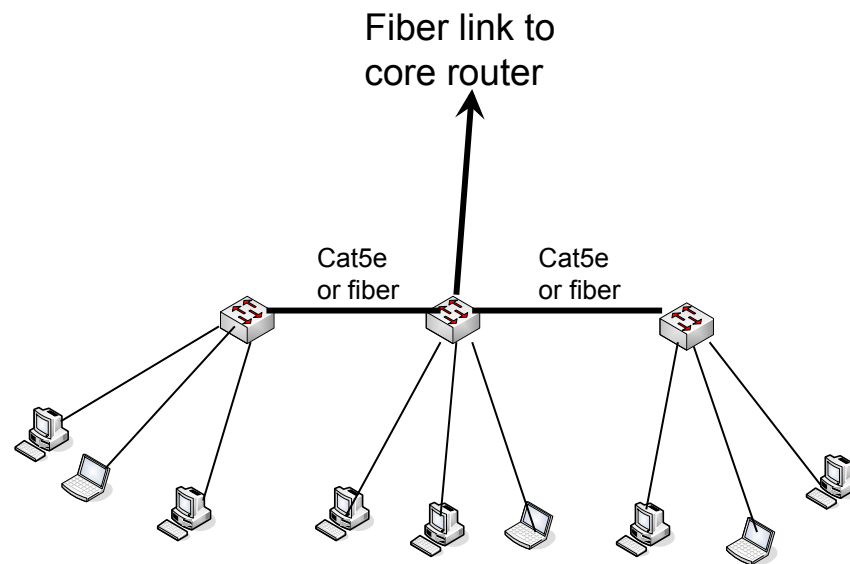

UNIVERSITY OF OREGON

Core Network



UNIVERSITY OF OREGON



Routing versus Switching

Layer 2 versus Layer 3

- Routers provide more isolation between devices (they stop broadcasts)
- Routing is more complicated, but also more sophisticated and can make more efficient use of the network, particularly if there are redundancy elements such as loops



UNIVERSITY OF OREGON




Layer 3 Switches

- Many vendors use the term “Layer 3 Switch”.
- These are contradictory terms
 - Layer 3 = Routing
 - Switch = Layer 2
- What vendors mean is that it is a device that can be configured as a router or a switch or possibly both at the same time.



Switching versus Routing

These links must be routed, not switched

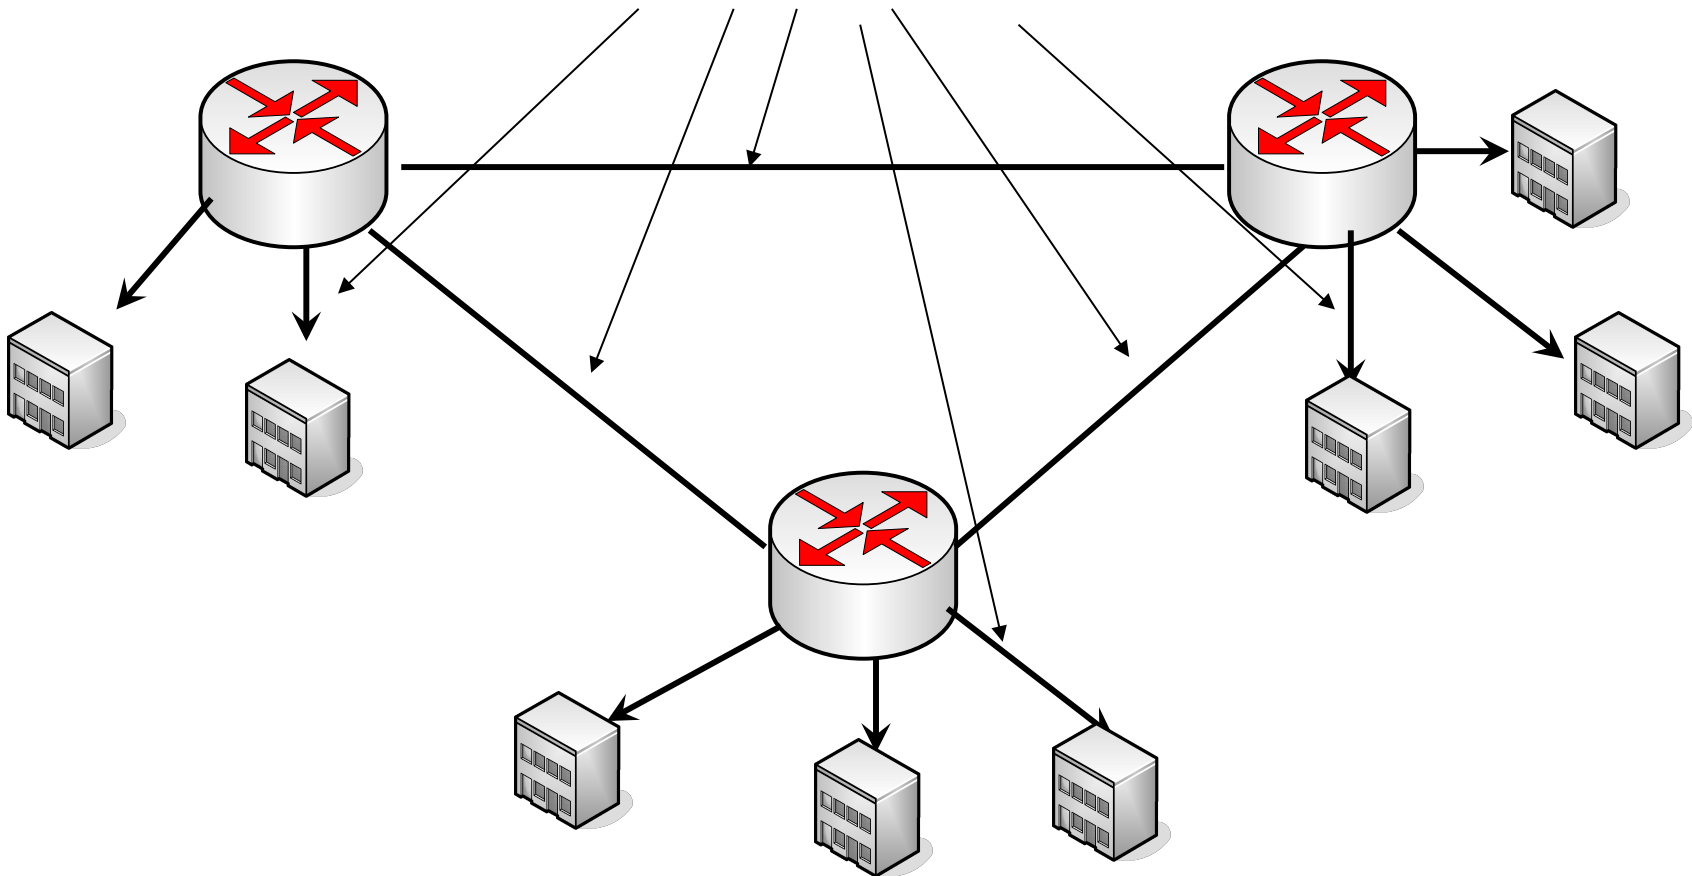

UNIVERSITY OF OREGON



Core Network

- Reliability is the key
 - remember many users and possibly your whole network relies on the core
- May have one or more network core locations
- Core location must have reliable power
 - UPS battery backup (redundant UPS as your network evolves)
 - Generator
 - Grounding and bonding
- Core location must have reliable air conditioning




UNIVERSITY OF OREGON



Core Network

- At the core of your network should be routers – you must route, not switch.
- Routers give isolation between subnets
- A simple core:

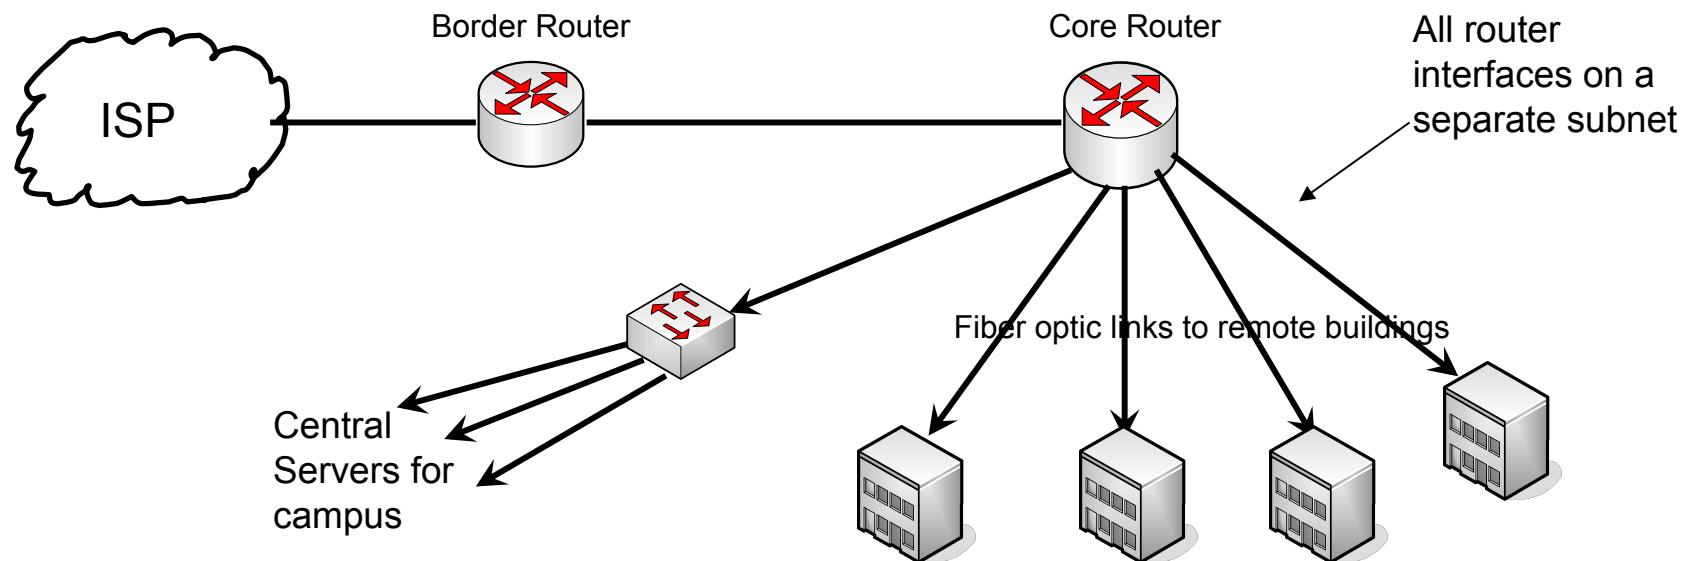


UNIVERSITY OF OREGON



Where to put Firewalls

- Security devices are usually placed “in line”
- This means that the speed of the firewall affects access to the outside world
- This is a typical design:

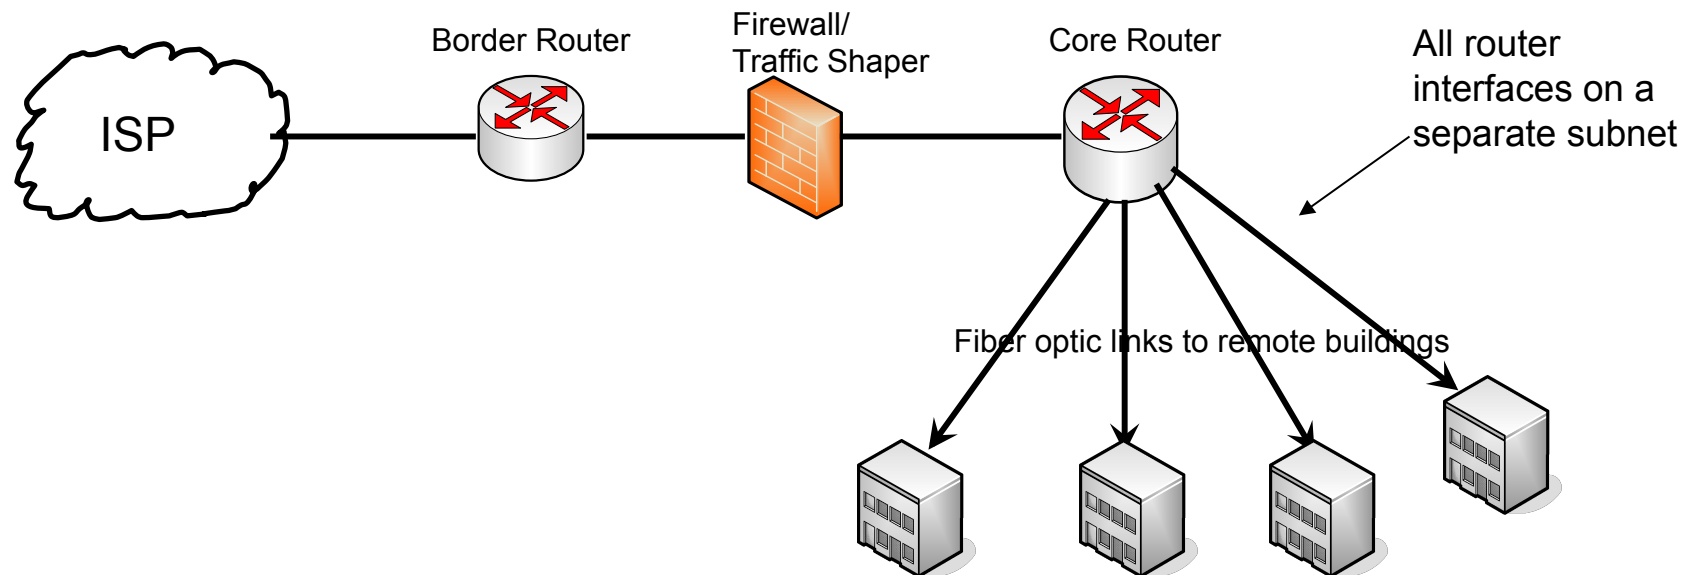


UNIVERSITY OF OREGON



Where to put Firewalls

- As Campus Networks have gotten better bandwidth, the firewall becomes a bottleneck.
- Can move part of your network from behind the firewall to allow full bandwidth, un-filtered access to the Internet
- Recommended Configuration:

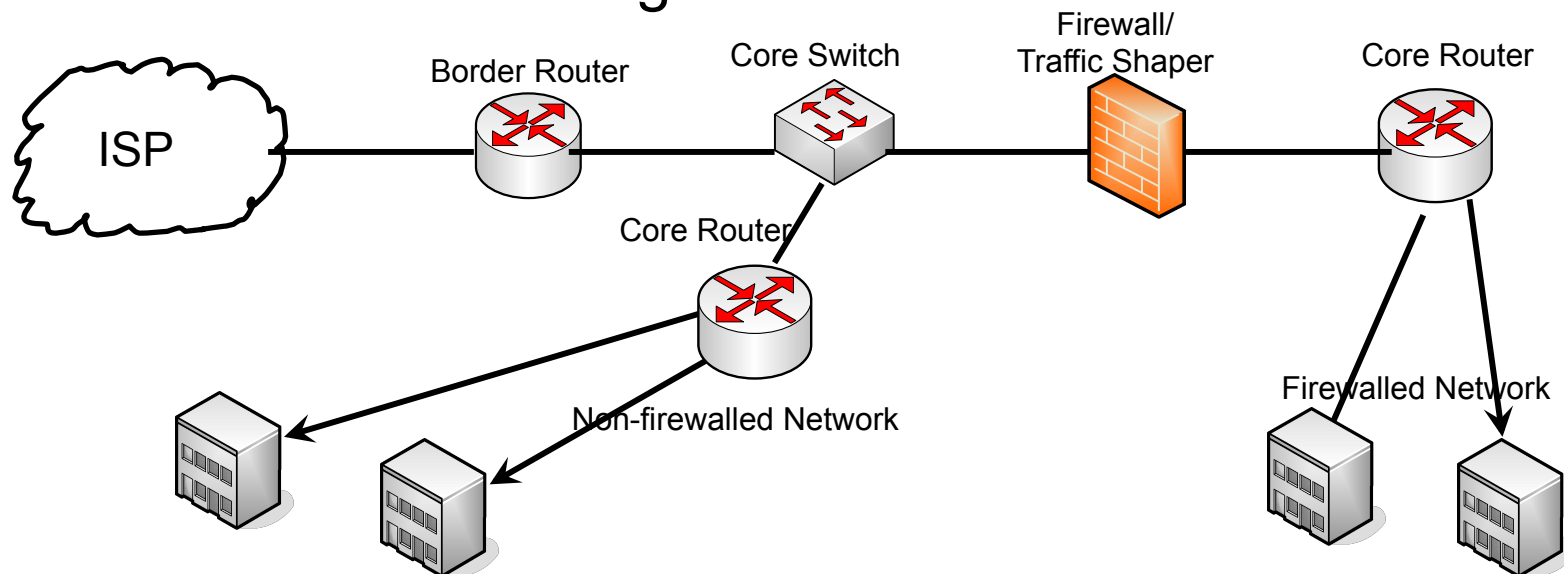


UNIVERSITY OF OREGON



Where to put Firewalls

- As Campus Networks have gotten better bandwidth, the firewall becomes a bottleneck.
- Consider moving high bandwidth devices from behind firewall (this is sometimes called the Science DMZ)
- Recommended Configuration:

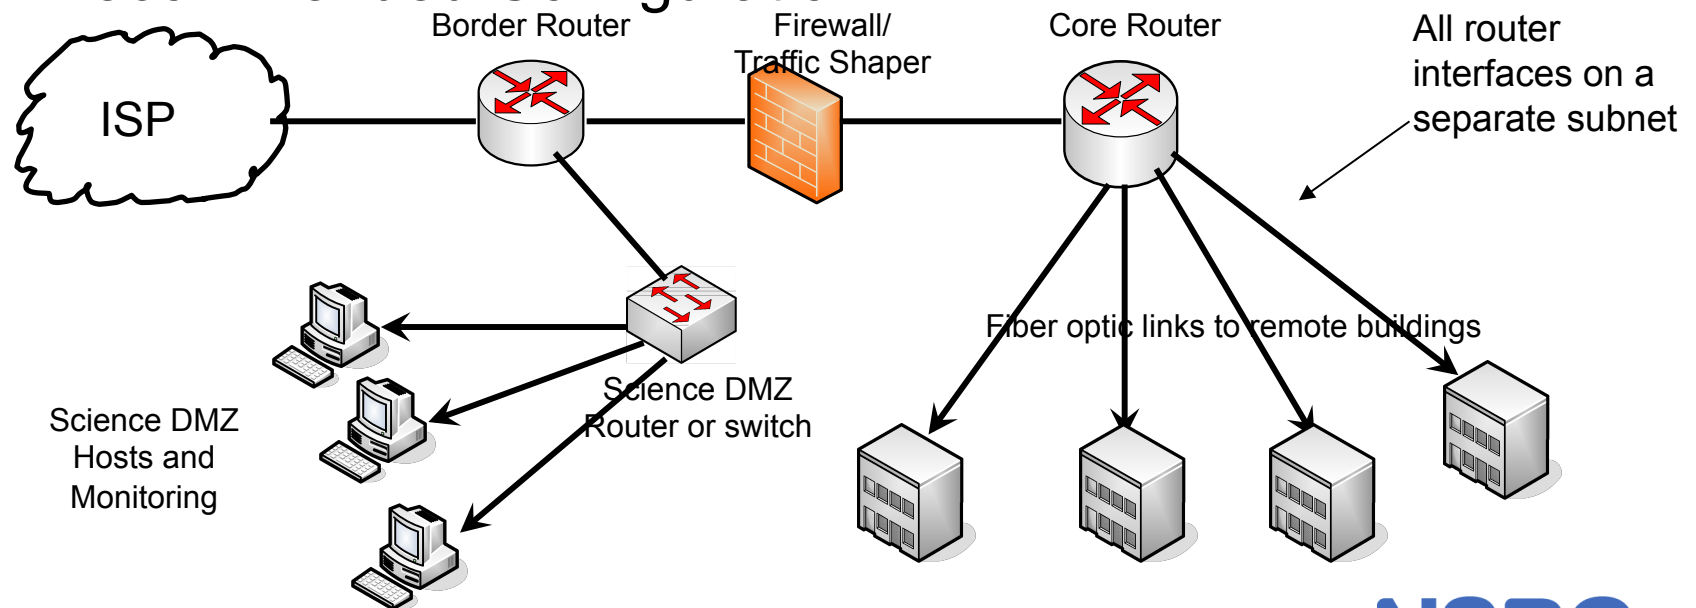


UNIVERSITY OF OREGON



Where to put Servers?

- Servers should never be on the same subnet as users
- Should be on a separate subnet off of the core router
- Servers should be at your core location where there is good power and air conditioning

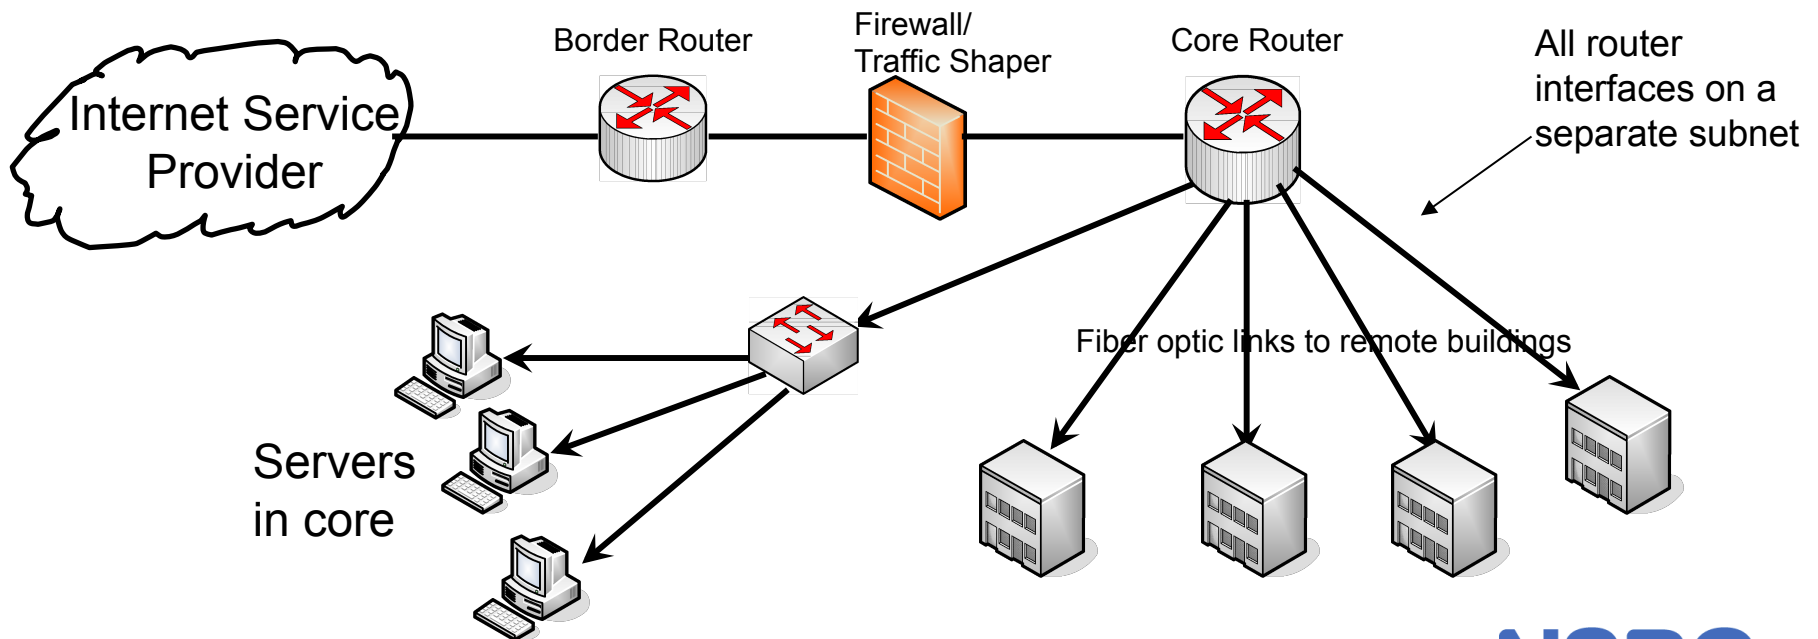


UNIVERSITY OF OREGON



Where to put Servers?


- Sometimes you need servers that have public IP addresses
- Can put directly off of a firewall with no NAT
- Can have some servers with an interface on both the external network and an internal network

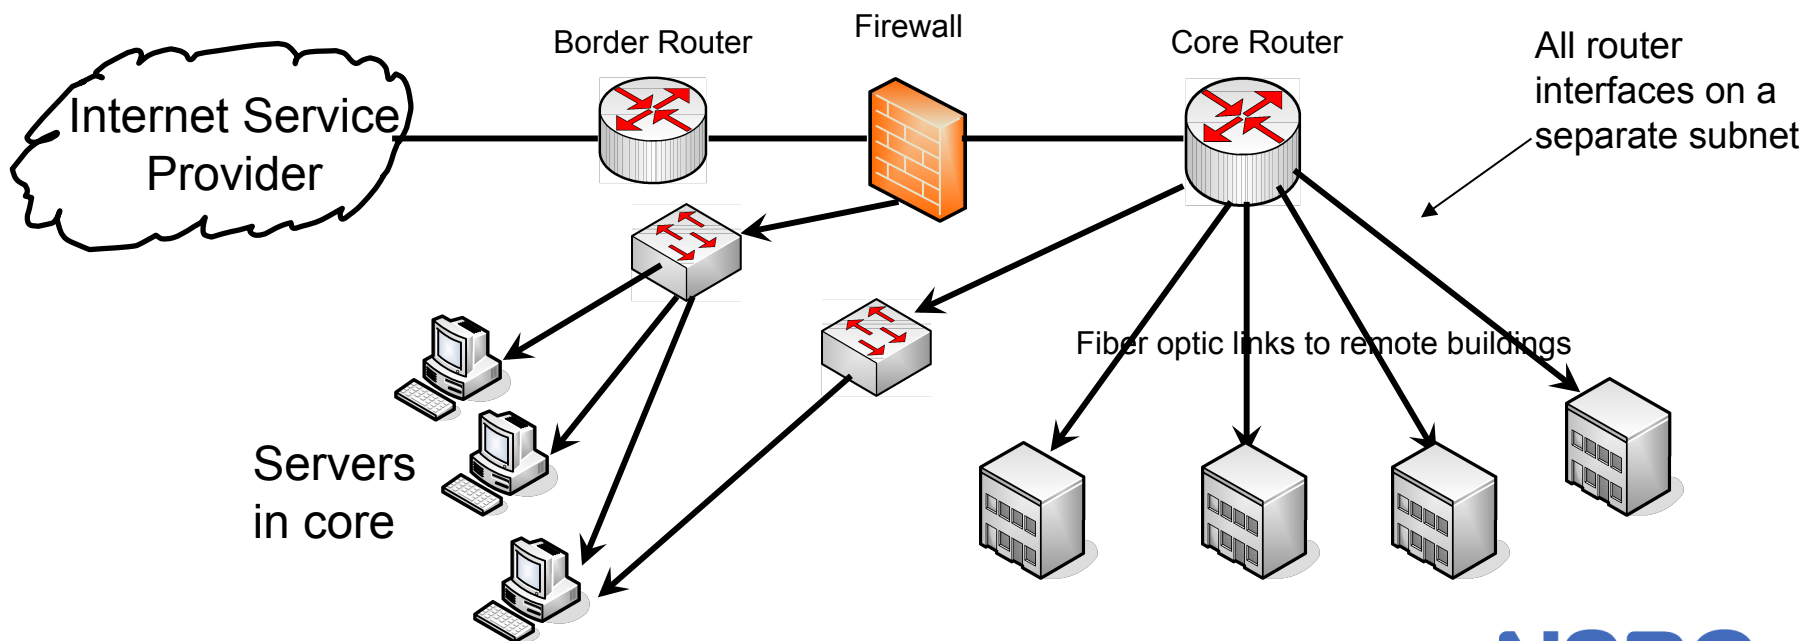

UNIVERSITY OF OREGON

Border Router


- Connects to outside world
- RENS and Peering are the reason you need them
- Must get Provider Independent IP address space to really make this work right

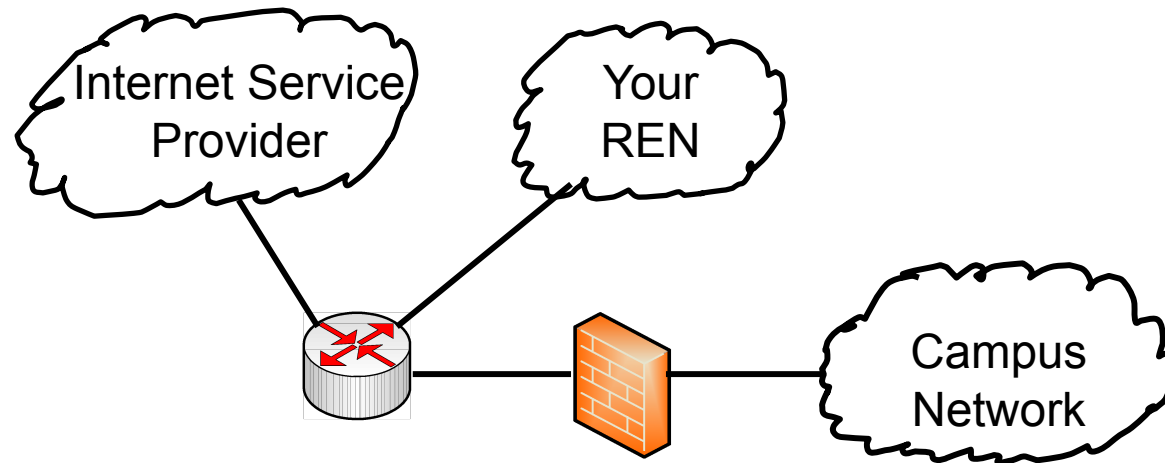

UNIVERSITY OF OREGON




Putting it all Together

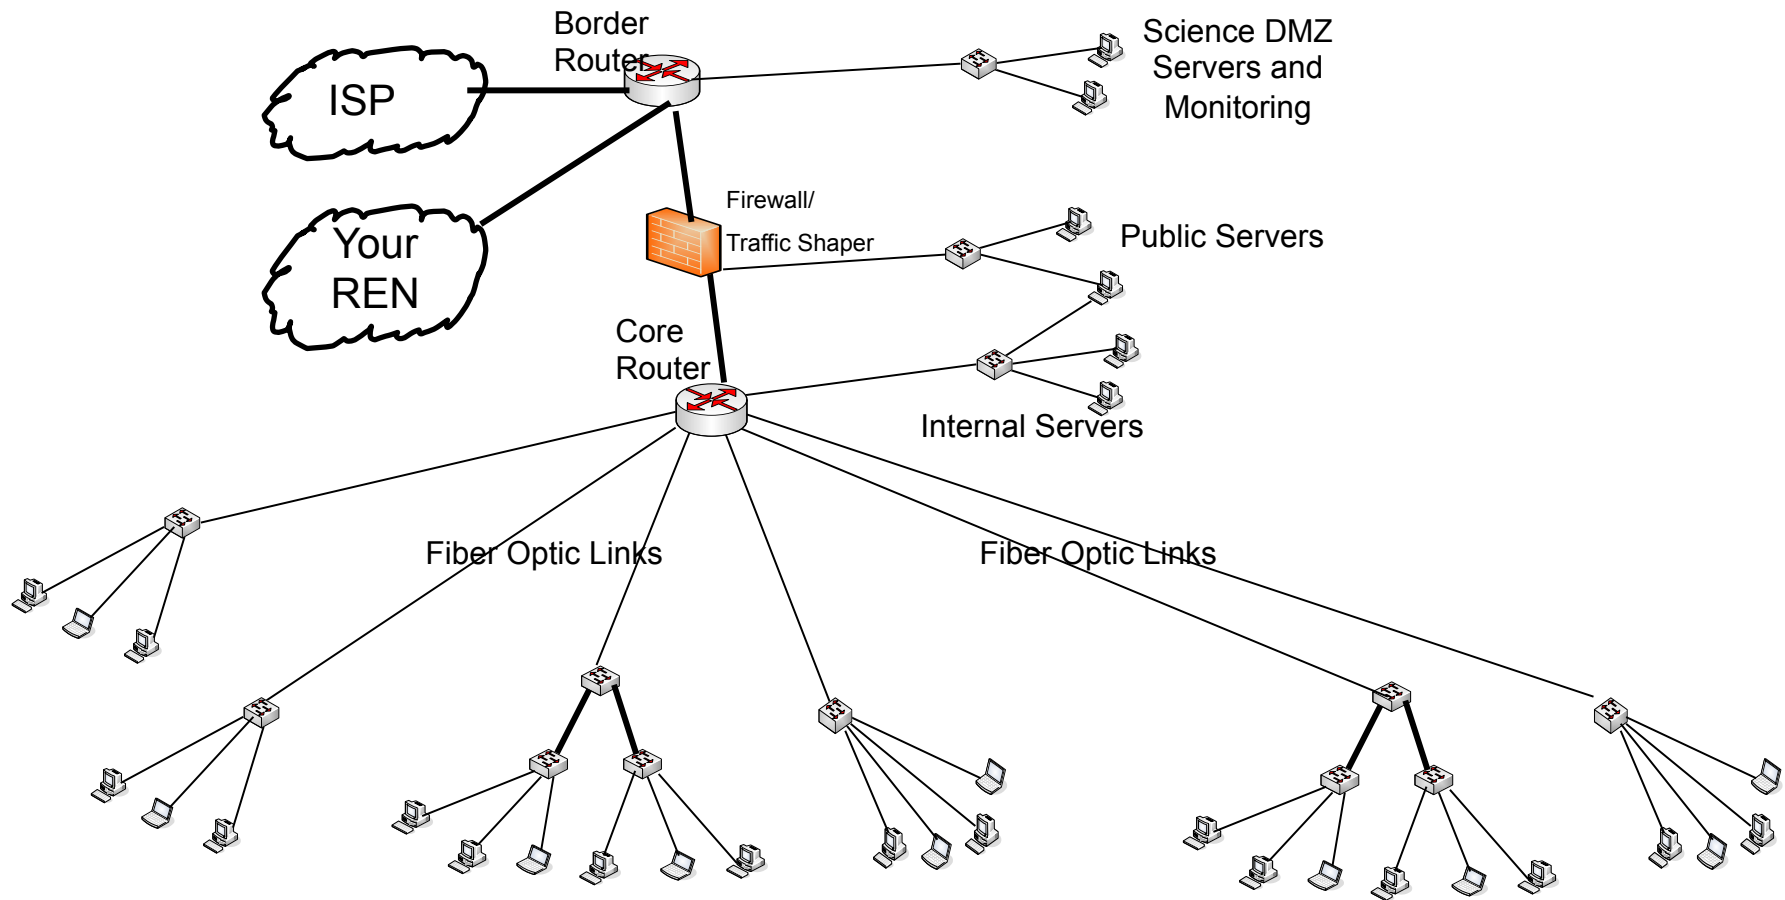

UNIVERSITY OF OREGON



Wireless Links instead of Fiber

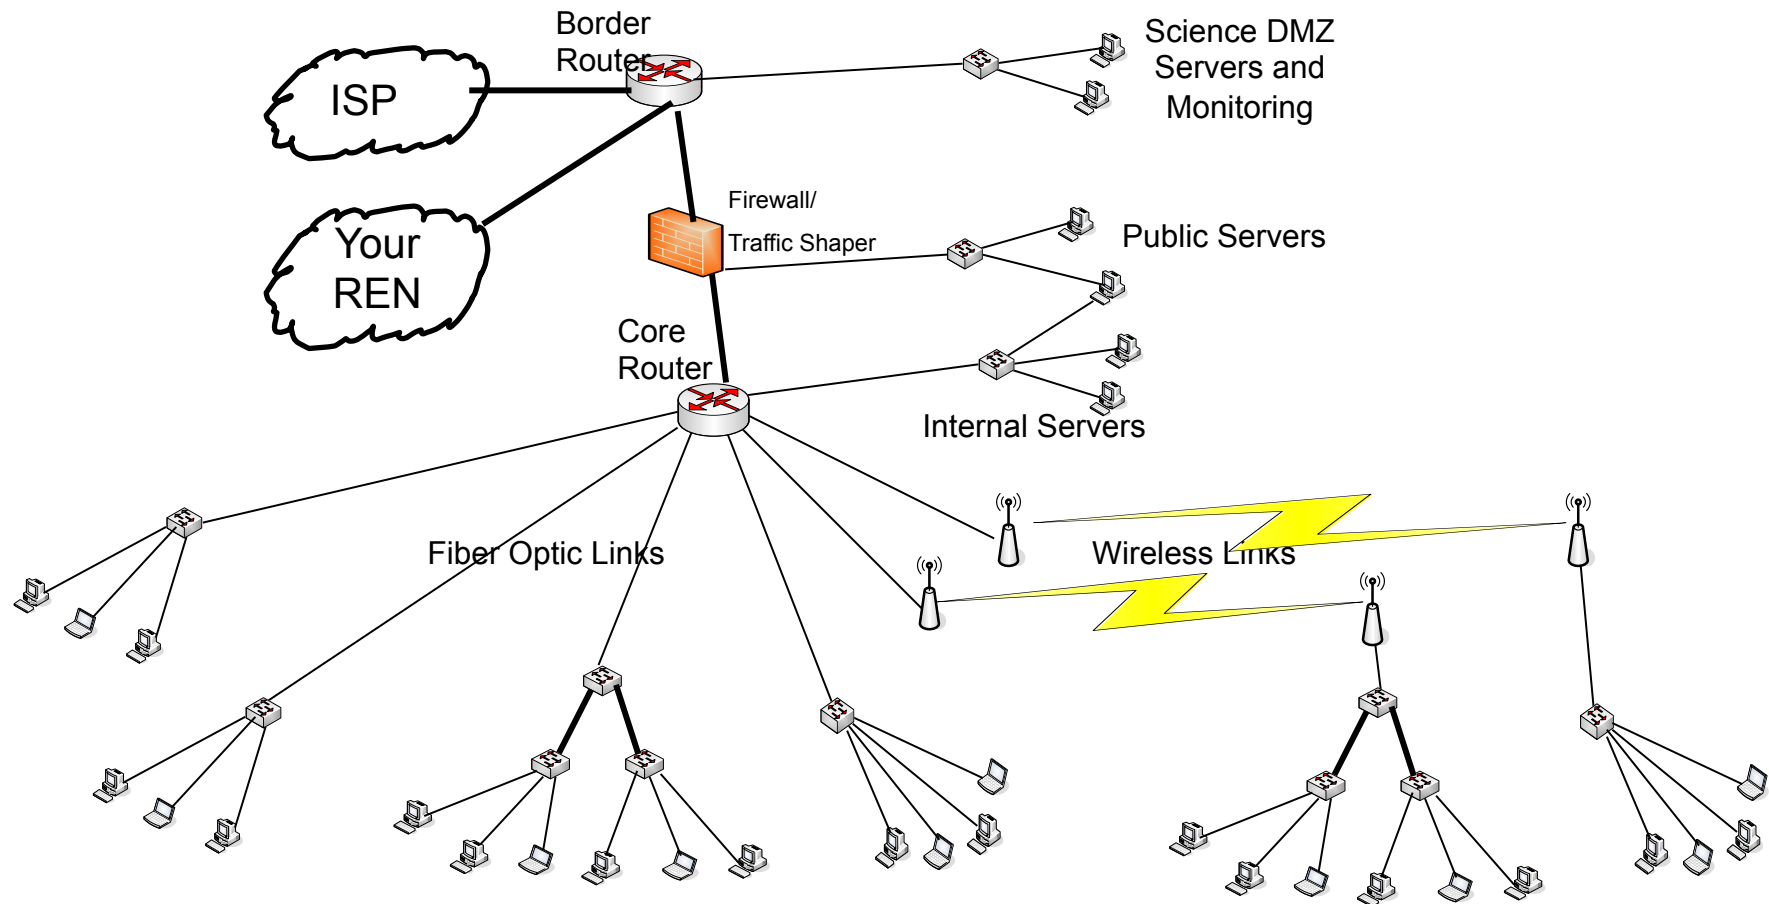

UNIVERSITY OF OREGON



Layer 2 and 3 Summary

- Route in the core
- Switch at the edge
- Build star networks – don't daisy chain
- Buy only managed switches – re-purpose your old unmanaged switches for labs



UNIVERSITY OF OREGON



Questions?


This document is a result of work by the Network Startup Resource Center (NSRC at <http://www.nsrc.org>). This document may be freely copied, modified, and otherwise re-used on the condition that any re-use acknowledge the NSRC as the original source.



UNIVERSITY OF OREGON



Symbols to use for diagrams

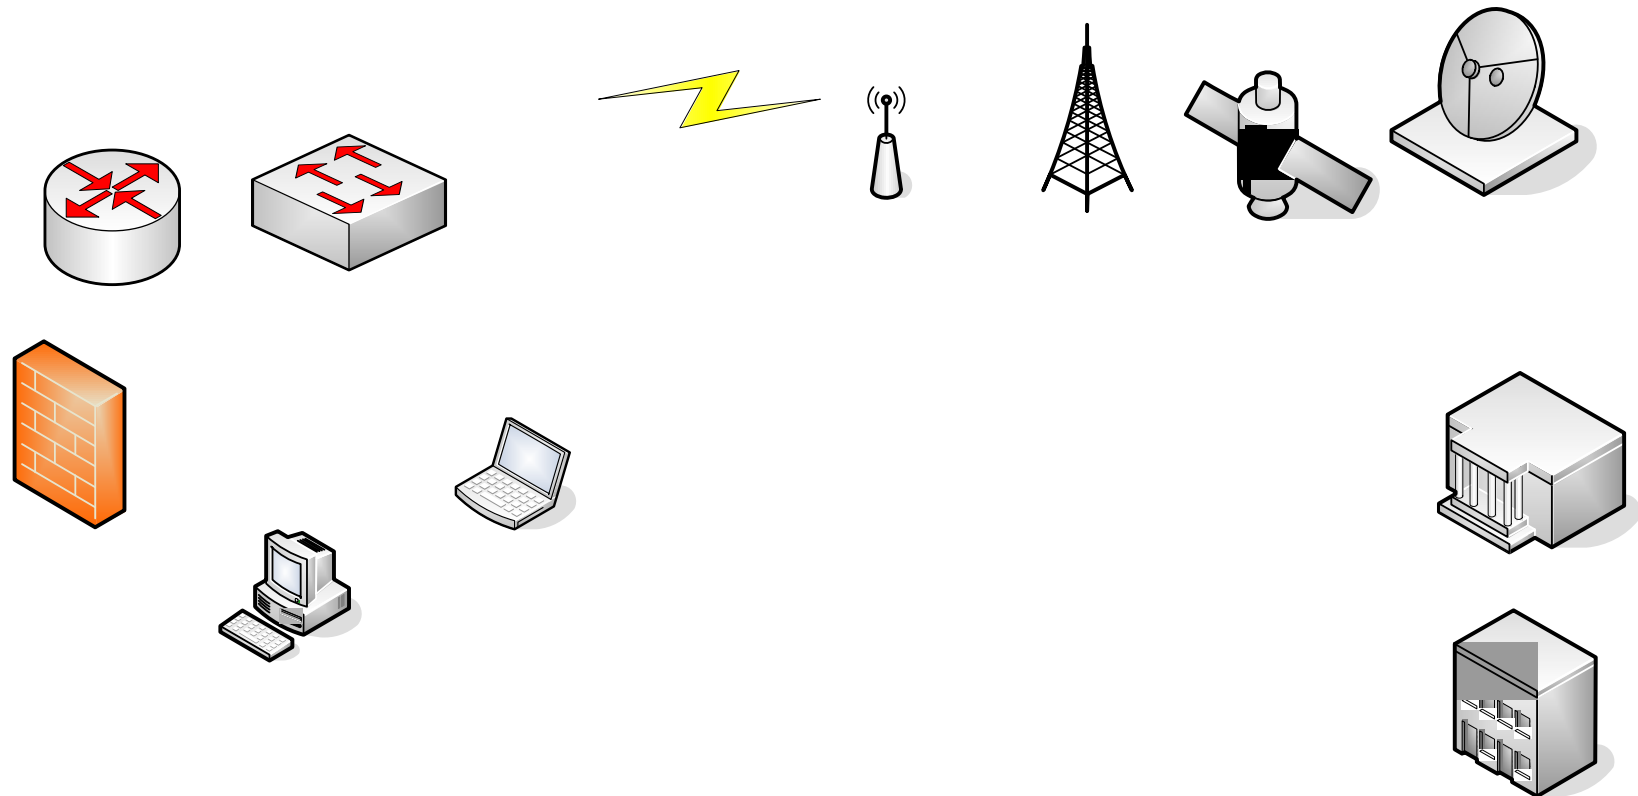

UNIVERSITY OF OREGON

