

Campus Network Design Workshop

IP Addressing


This document is a result of work by the Network Startup Resource Center (NSRC at <http://www.nsrc.org>). This document may be freely copied, modified, and otherwise re-used on the condition that any re-use acknowledge the NSRC as the original source.



UNIVERSITY OF OREGON



Hierarchical address allocation

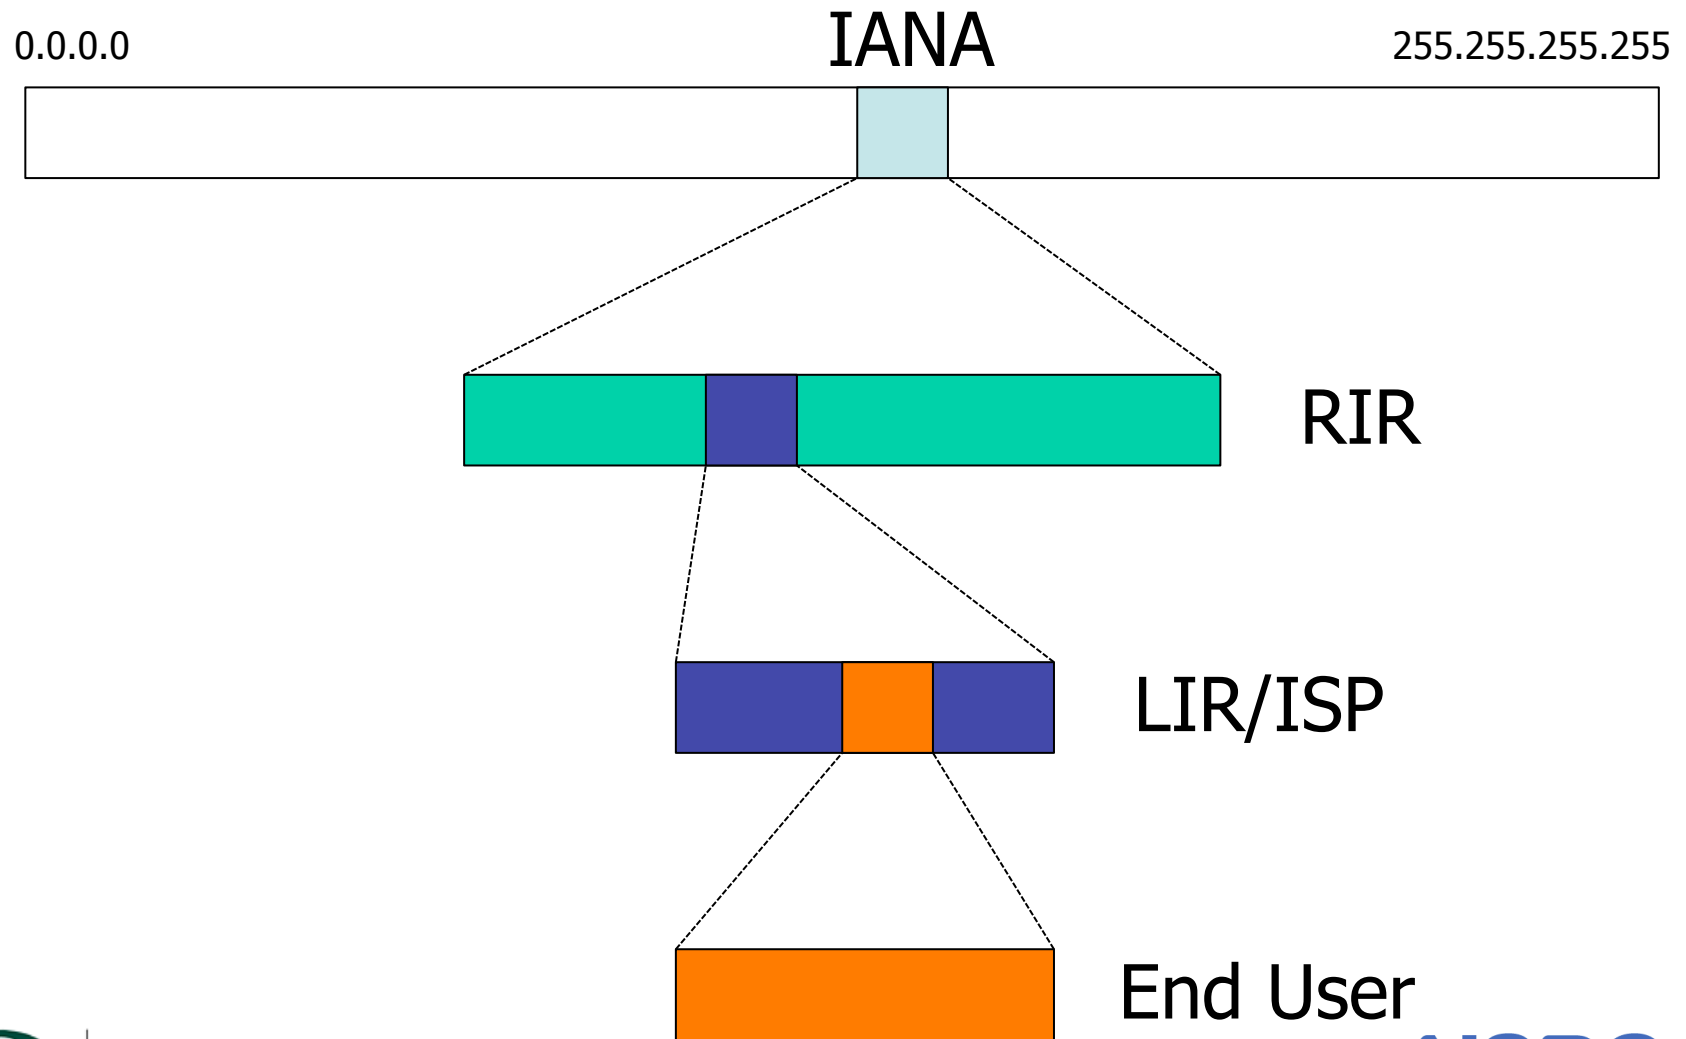

UNIVERSITY OF OREGON



IPv4 addresses

- 32-bit binary number
 - How many unique addresses in total?
- Conventionally represented as four dotted decimal octets

1000000011011111001110100010011



128 . 223 . 157 . 19


Can you explain why 00010011 = 19 in decimal?



UNIVERSITY OF OREGON




Prefixes

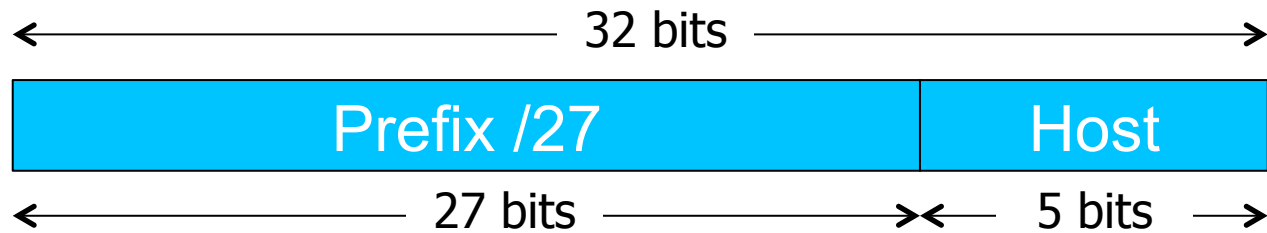

- A range of IP addresses is given as a prefix, e.g. 192.0.2.128/27
- In this example:
 - How many addresses are available?
 - What are the lowest and highest addresses?




Prefix calculation

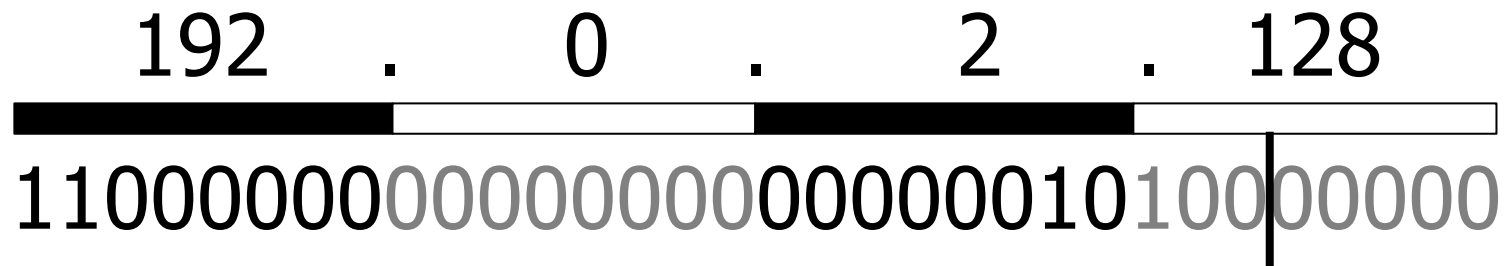


Prefix length /27 → First 27 bits are fixed

Lowest address:

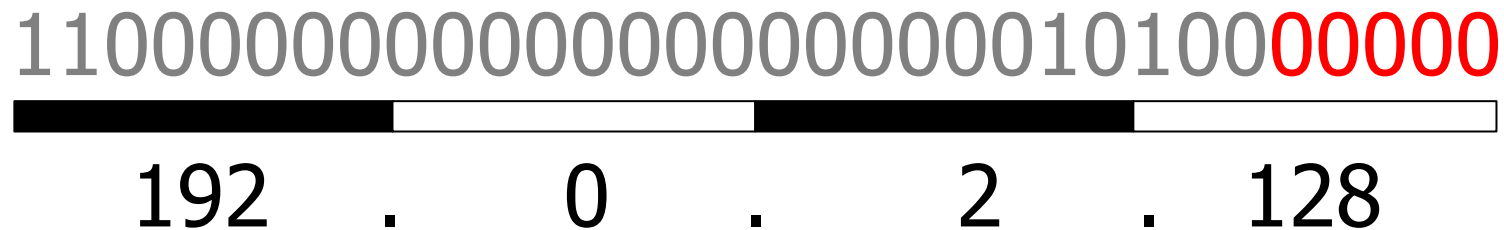


Highest address:

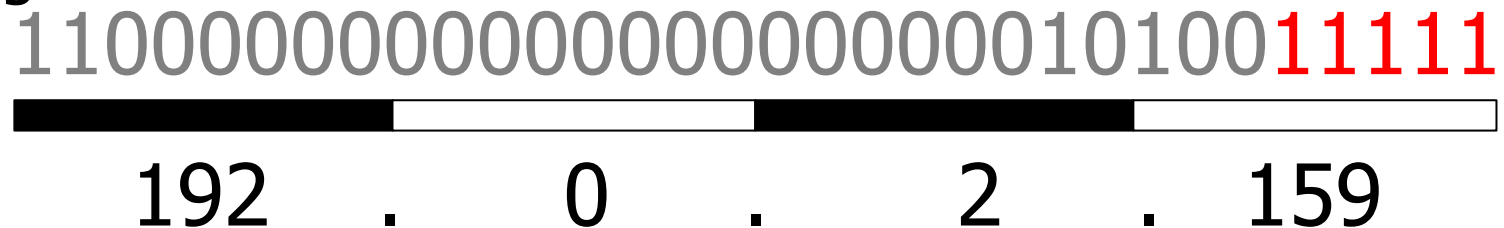

UNIVERSITY OF OREGON



IPv4 “Golden Rules”

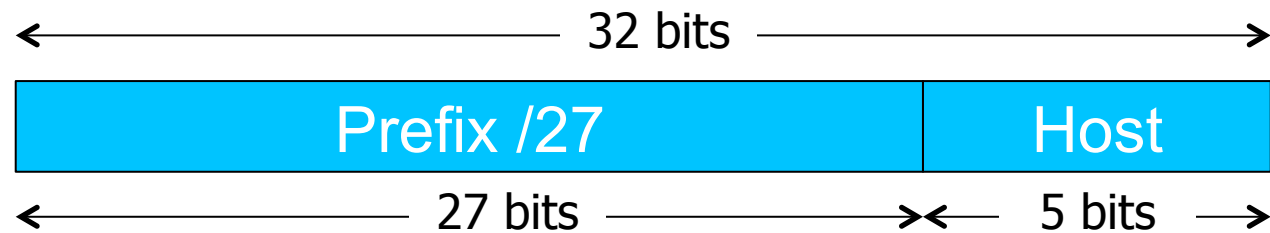

1. All hosts on the same L2 network must share the same prefix
2. All hosts with the same prefix have different host part
3. Host part of all-zeros and all-ones are reserved



Golden Rules for 192.0.2.128/27

- Lowest 192.0.2.128 = network address
- Highest 192.0.2.159 = broadcast address
- Usable: 192.0.2.129 to 192.0.2.158
- Number of usable addresses: $32 - 2 = 30$



UNIVERSITY OF OREGON



Exercises

- Network 10.10.10.0/25
 - How many addresses in total?
 - How many usable addresses?
 - What are the lowest and highest usable addresses?
- Network 10.10.20.0/22
 - How many addresses in total?
 - How many usable addresses?
 - What the the lowest and highest usable addresses?



An edge case

- How many usable addresses in a /30 prefix?
- What is this used for?
 - (Note: modern routers support /31 for this purpose to reduce IPv4 address wastage)

Netmask

- Netmask is just an alternative (old) way of writing the prefix length
- A '1' for a prefix bit and '0' for a host bit
- Hence N x 1's followed by $(32-N)$ x 0's


$$/27 =$$

1111111111111111111100000

255 . 255 . 255 . 224

Subnetting

- Since each L2 network needs its own prefix, then if you route more than one network you need to divide your allocation
- Ensure each prefix has enough IPs for the number of hosts on that network

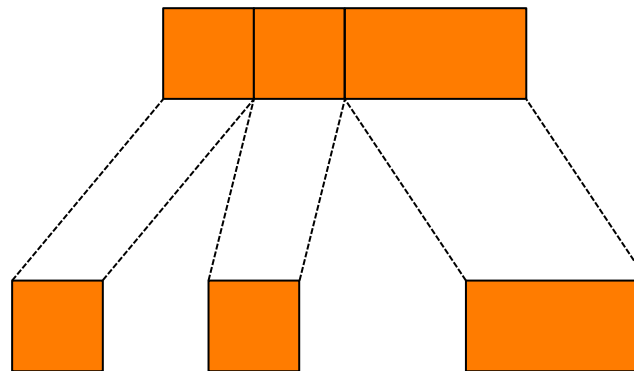

End User
Allocation

Subnets



UNIVERSITY OF OREGON



Subnetting Example

- You have been given 192.0.2.128/27
- However you want to build two Layer 2 networks and route between them
- The Golden Rules demand a different prefix for each network
- Let's split this address space into two equal-sized pieces

Subnetting /27

192 . 0 . 2 . 128

110000000000000000000000001010000000

Move one bit from host part to prefix

We now have two /28 prefixes

110000000000000000000000001010000000

192 . 0 . 2 . 128

Second prefix:

110000000000000000000000001010001000

192 . 0 . 2 . 144



UNIVERSITY OF OREGON




Check correctness

- Expand each new prefix into lowest and highest
- Ranges should not overlap
 - 192.0.2.128/28
 - Lowest (network) = 192.0.2.128
 - Highest (broadcast) = 192.0.2.143
 - 192.0.2.144/28
 - Lowest (network) = 192.0.2.144
 - Highest (broadcast) = 192.0.2.159
 - How many usable addresses now?



Aggregation tree

- Continue to divide prefixes as required
- Can visualize this as a tree

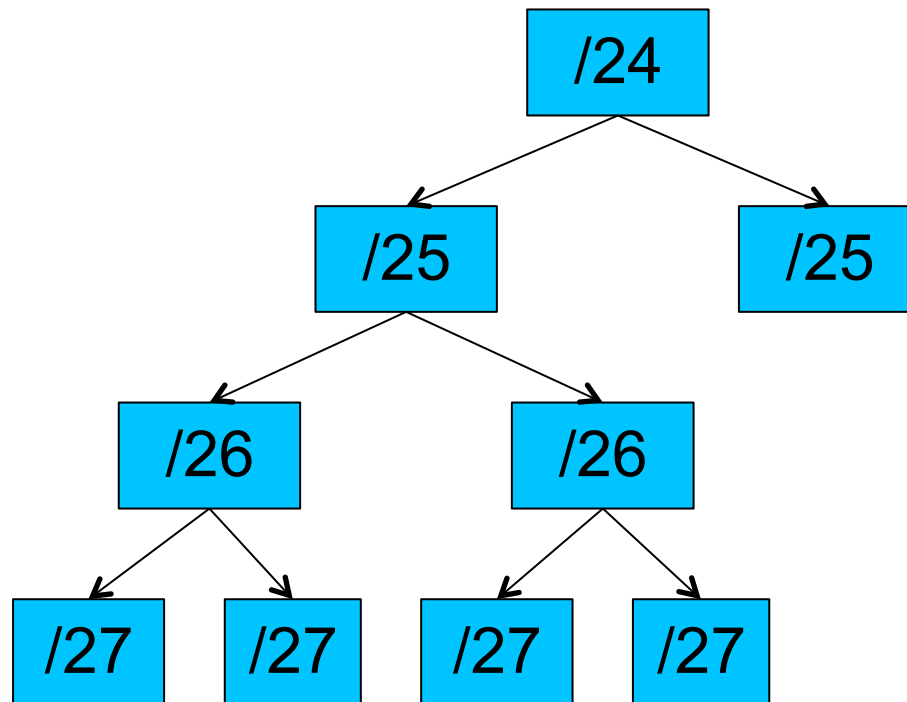

Questions on IPv4?



UNIVERSITY OF OREGON



IPv6 addresses

- 128-bit binary number
- Conventionally represented in hexadecimal – 8 words of 16 bits, separated by colons

2607:8400:2880:0004:0000:0000:80df:9d13

- Leading zeros can be dropped
- One contiguous run of all-zero words can be replaced by "::"

2607:8400:2880:4::80df:9d13



UNIVERSITY OF OREGON



Hexadecimal

0000	0	1000	8
0001	1	1001	9
0010	2	1010	a
0011	3	1011	b
0100	4	1100	c
0101	5	1101	d
0110	6	1110	e
0111	7	1111	f

0000 = 00000000000000000000

ffff = 11111111111111111111



UNIVERSITY OF OREGON




IPv6 rules

- With IPv6, every network prefix is /64
 - (/127 is recommended for P2P links)
- The remaining 64 bits can be assigned by hand, or picked automatically
 - e.g. derived from NIC MAC address
- There are special prefixes
 - e.g. link-local addresses start fe80::
- Total available IPv6 space is $\approx 2^{61}$ subnets
- Typical end-user allocation is /48



IPv6 addressing

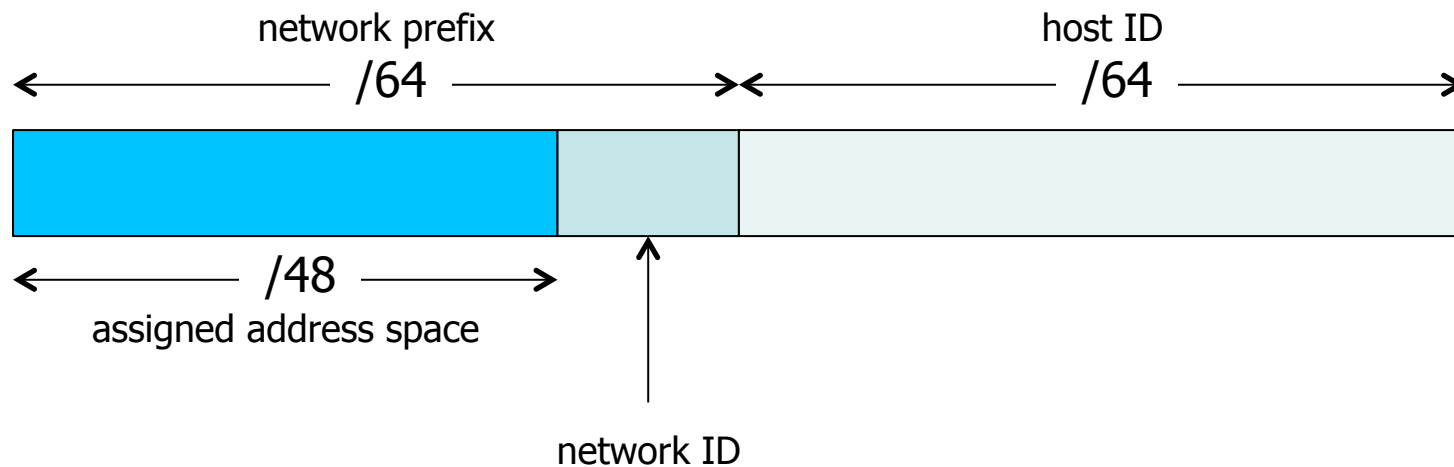

- How many /64 networks can you build from a /48 allocation?

IPv6 addressing

- You are assigned 2001:db8:123::/48
 - 2001:0db8:0123:0000:0000:0000:0000:0000
- Lowest /64 network?
 - 2001:db8:123:0000::/64
 - written simply 2001:db8:123::/64
- Highest /64 network?
 - 2001:db8:123:ffff::/64



Ways to allocate the host part

- Do it automatically from MAC address – "stateless autoconfiguration"
 - Not recommended for servers: if you change the NIC then the IPv6 address changes!
- Can number sequentially from 1, or use the last octet of the IPv4 address
- Or embed the whole IPv4 address
 - e.g. 2607:8400:2880:4::80df:9d13
 - 80df9d13 hex = 128.223.157.19 in decimal
 - Can write 2607:8400:2880:4::128.223.157.19



Notes on IPv6

- Broadly similar to IPv4
- "ARP" is replaced by "NDP"
- IPv6 client configuration options
 - Stateless autoconf (router advertisements)
 - Stateless autoconf + stateless DHCPv6
 - Stateful DHCPv6
- Interfaces typically get both a link-local address and one or more routable prefixes
- "Dual stack" = v4 and v6 side-by-side



Questions on IPv6?



UNIVERSITY OF OREGON



Questions?

This document is a result of work by the Network Startup Resource Center (NSRC at <http://www.nsrc.org>). This document may be freely copied, modified, and otherwise re-used on the condition that any re-use acknowledge the NSRC as the original source.



UNIVERSITY OF OREGON

