

# Campus Network Design Workshop

## Advanced L2 features



These materials are licensed under the Creative Commons Attribution-NonCommercial 4.0 International license  
(<http://creativecommons.org/licenses/by-nc/4.0/>)



UNIVERSITY OF OREGON

Last updated 17<sup>th</sup> October 2016



# Rapid Spanning Tree (802.1w)

- Convergence is **much** faster
  - Communication between switches is more interactive
- Edge ports don't participate
  - Edge ports transition to forwarding state immediately
  - If BPDUs are received on an edge port, it becomes a non-edge port to prevent loops



# Rapid Spanning Tree (802.1w)

- Defines these port roles:
  - Root Port (same as with 802.1d)
  - Alternate Port
    - A port with an alternate path to the root
  - Designated Port (same as with 802.1d)
  - Backup Port
    - A backup/redundant path to a segment where another bridge port already connects.




# Rapid Spanning Tree (802.1w)

- Synchronization process uses a handshake method
  - After a root is elected, the topology is built in cascade, where each switch proposes to be the designated bridge for each point-to-point link
  - While this happens, all the downstream switch links are blocking




# Rapid Spanning Tree (802.1w)

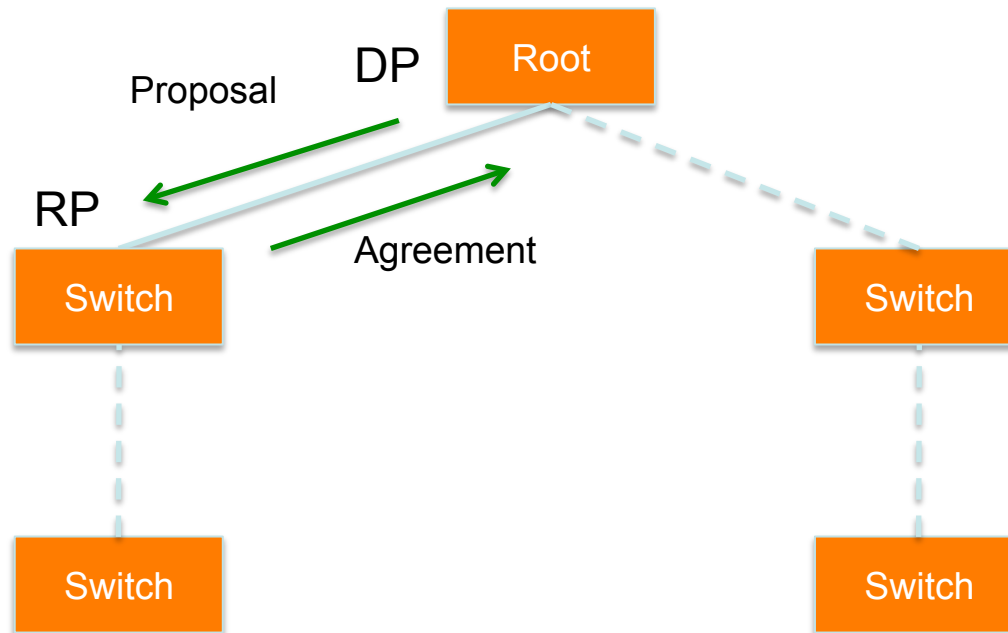


UNIVERSITY OF OREGON




# Rapid Spanning Tree (802.1w)

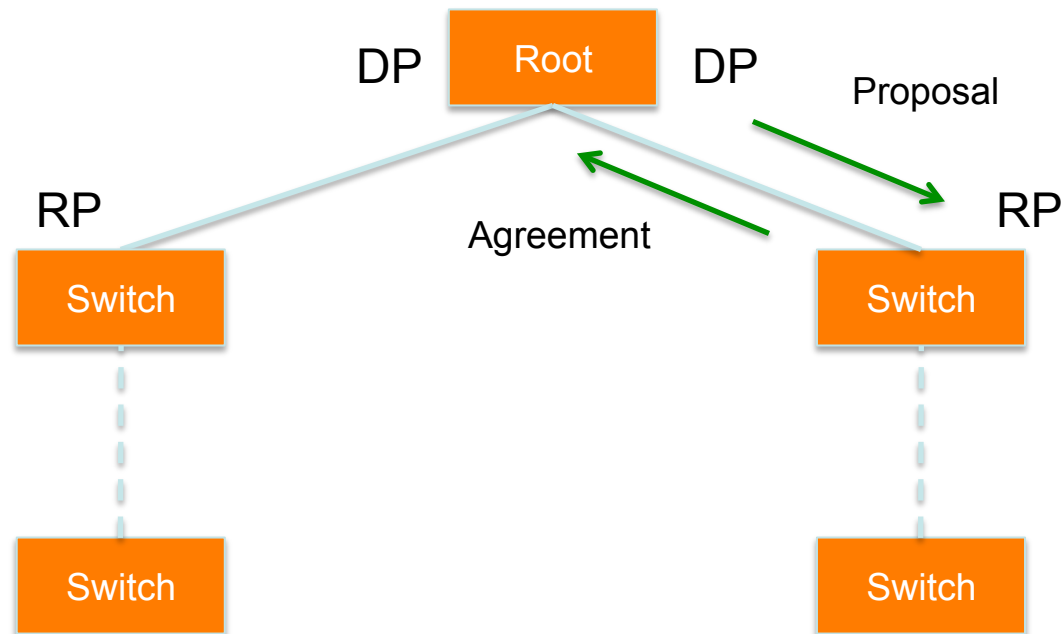

# Rapid Spanning Tree (802.1w)

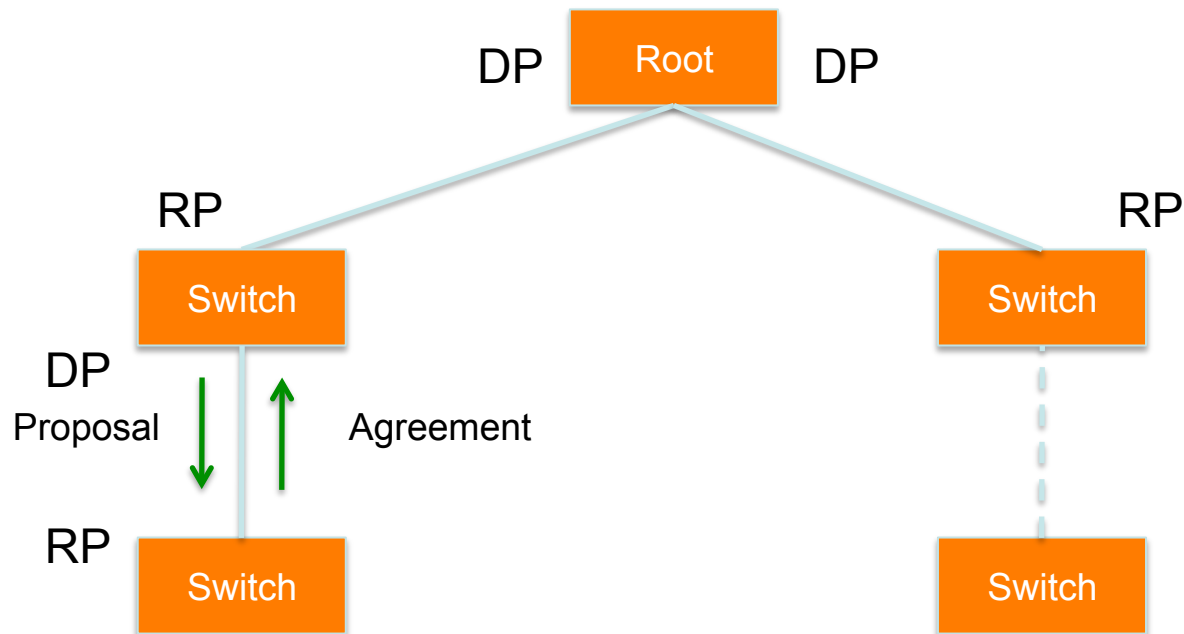

# Rapid Spanning Tree (802.1w)

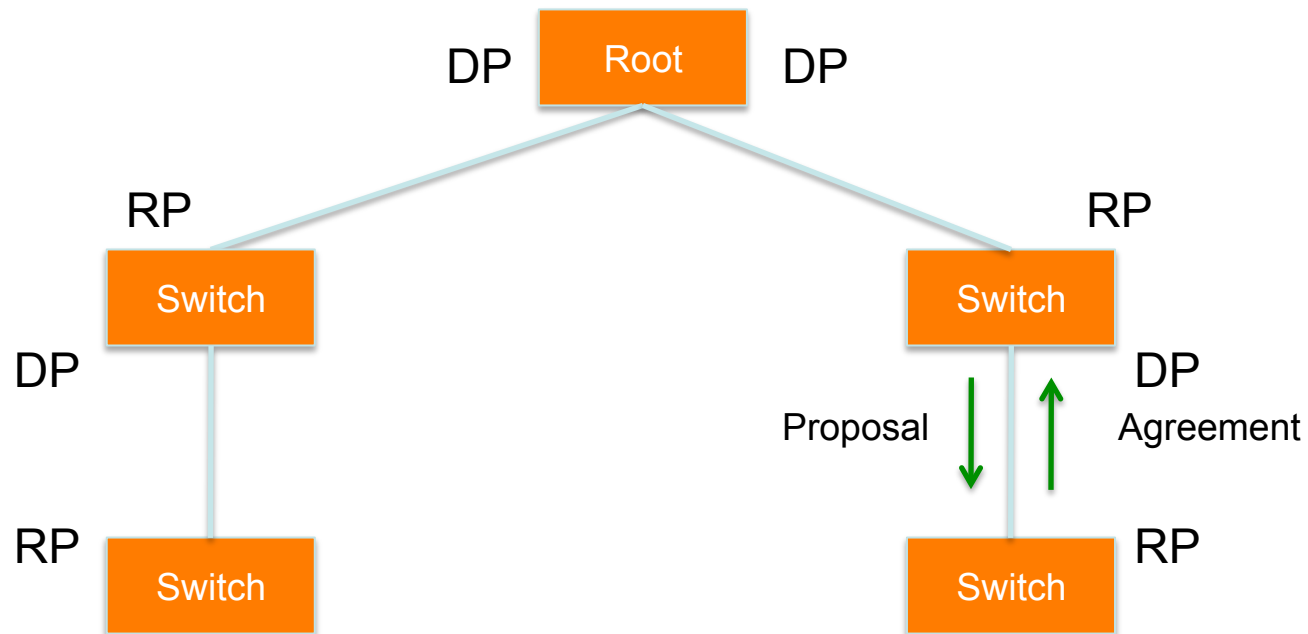



# Questions?





UNIVERSITY OF OREGON



# Multiple Spanning Tree (802.1s)

- Allows separate spanning trees per VLAN group
  - Different topologies allow for load balancing between links
  - One or more VLANs are assigned (mapped) to an “instance” of MST (MSTI)
  - A particular VLAN can be mapped to only one MSTI
- Compatible with STP and RSTP

# Multiple Spanning Tree (802.1s)

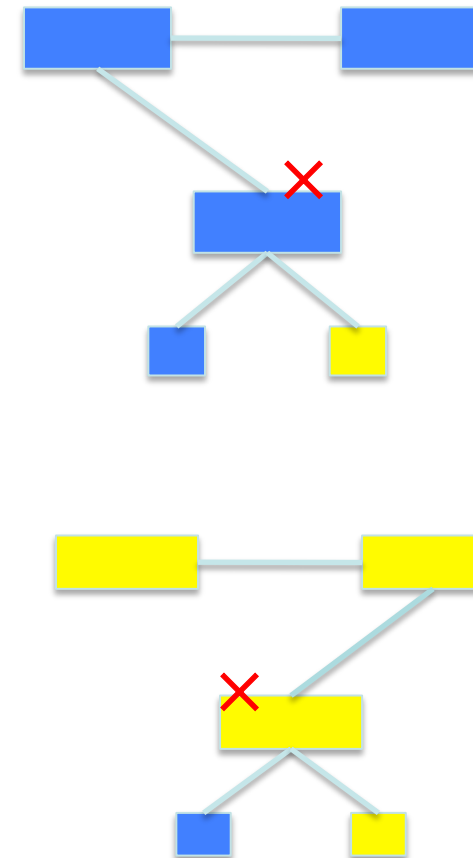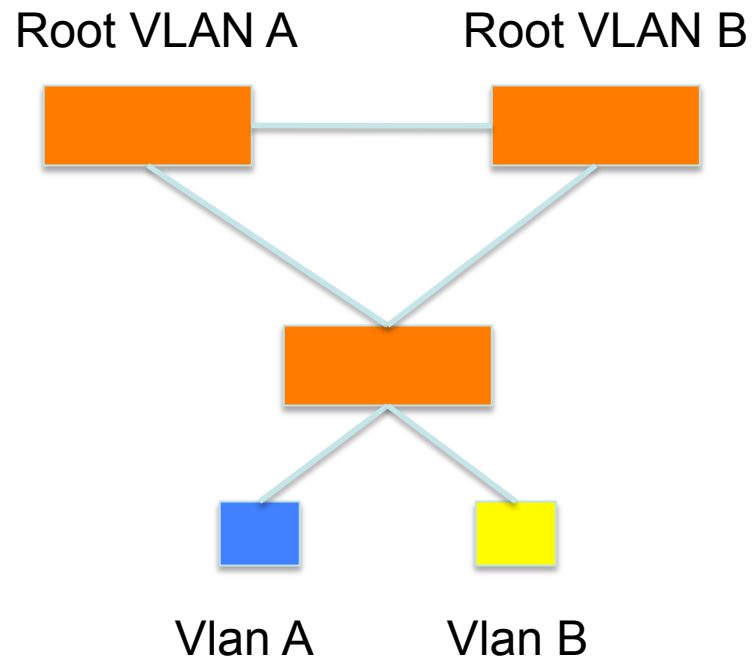

# Multiple Spanning Tree (802.1s)

- MST Instances
  - Groups of VLANs are mapped to particular Spanning Tree instances
  - These instances will represent the alternative topologies, or forwarding paths
  - You specify a root and alternate root for each instance

# Multiple Spanning Tree (802.1s)

- MST Region
  - Switches are members of a region if they have the same set of attributes:
    - MST configuration name
    - MST configuration revision
    - Instance-to-VLAN mapping
  - A digest of these attributes is sent inside the BPDUs for fast comparison by the switches
  - One region is usually sufficient



# Multiple Spanning Tree (802.1s)

- CST = Common Spanning Tree
  - Defined in 802.1q standard
  - In order to interoperate with other versions of Spanning Tree, MST needs a common tree that contains all the islands, including other MST regions
  - One spanning-tree instance for the entire bridged network regardless of the number of VLANs or regions




# Multiple Spanning Tree (802.1s)

- IST = Internal Spanning Tree
  - Internal to the Region, that is
  - Within each MST region, the MSTP maintains multiple spanning-tree instances
  - Instance 0 is a special instance known as IST, which “extends” CST inside the MST region
  - MSTI instance 0 is always present if the switch is running MSTP
  - Presents the entire region as a single virtual bridge to the CST outside




# Multiple Spanning Tree (802.1s)

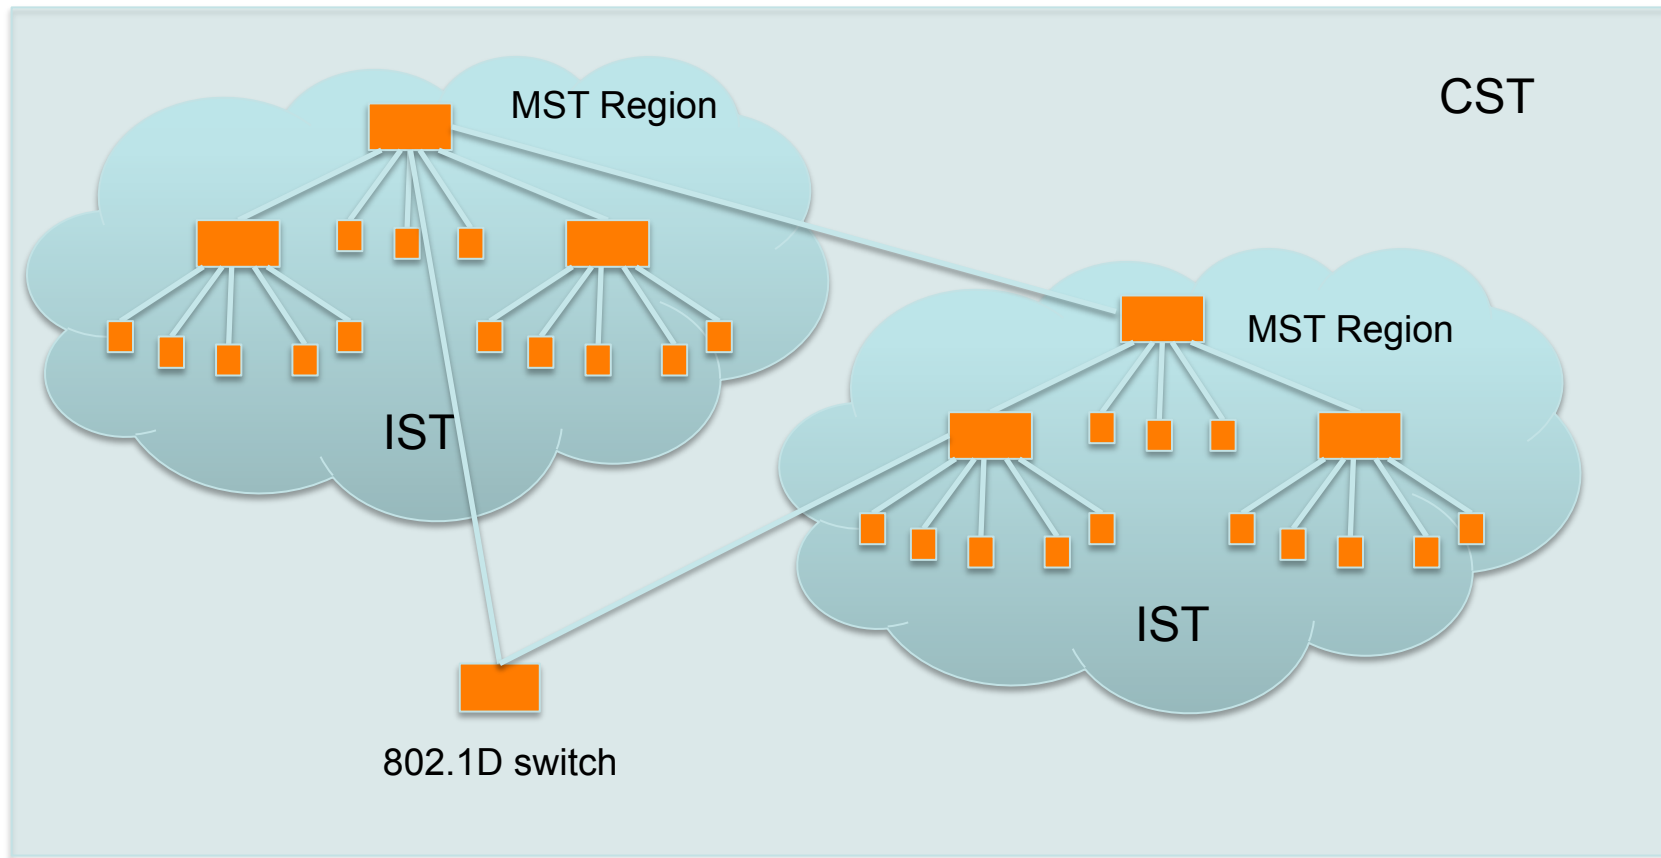

UNIVERSITY OF OREGON





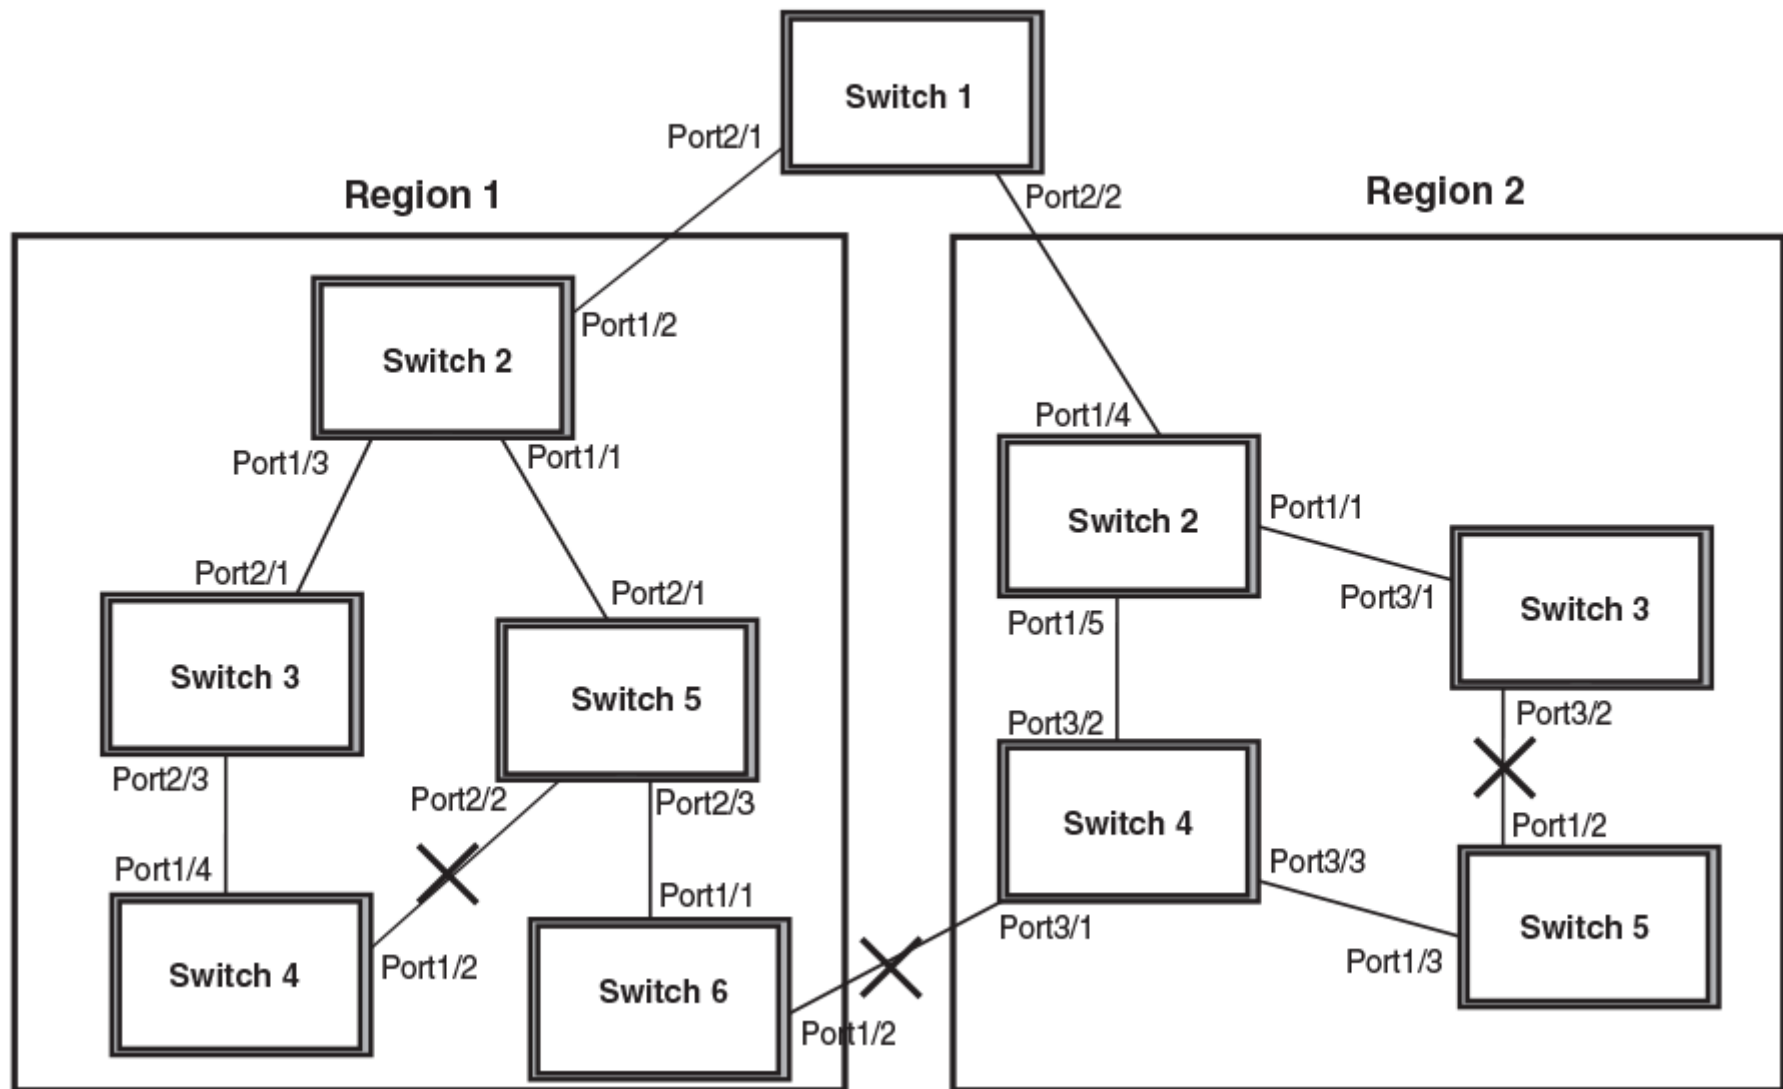

Source: brocade.com L2 Switch configuration guide



UNIVERSITY OF OREGON



# Multiple Spanning Tree (802.1s)

- Design Guidelines
  - Determine relevant forwarding paths, and distribute your VLANs equally into instances matching these topologies
  - Assign different root and alternate root switches to each instance
  - Make sure all switches match region attributes
  - Do not assign VLANs to instance 0, as this is used by the IST



# Questions?

This document is a result of work by the Network Startup Resource Center (NSRC at <http://www.nsrc.org>). This document may be freely copied, modified, and otherwise re-used on the condition that any re-use acknowledge the NSRC as the original source.



UNIVERSITY OF OREGON

