

Campus Network Design Workshop

L3 Switches

This document is a result of work by the Network Startup Resource Center (NSRC at <http://www.nsrc.org>). This document may be freely copied, modified, and otherwise re-used on the condition that any re-use acknowledge the NSRC as the original source.




UNIVERSITY OF OREGON



What's a Layer 3 switch?

- It's an Ethernet switch!
 - Can look at Ethernet headers
 - Builds MAC address table
- And it's a router!
 - Can look at IP headers
 - Has IP forwarding table and ARP table
- Which function it performs depend on how you configure it
- Out-of-the-box it will default to a simple L2 Ethernet switch


Factory Default

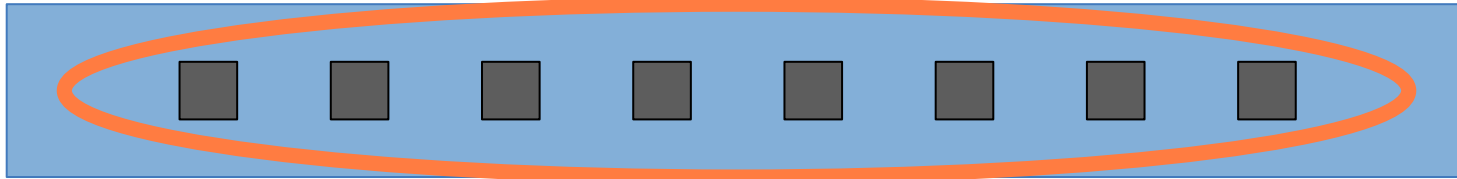

```
vlan 1
!  
interface range Gi 1 - 8  
    no shutdown  
    switchport  
    switchport mode access  
    switchport access vlan 1  
!
```



vLANs

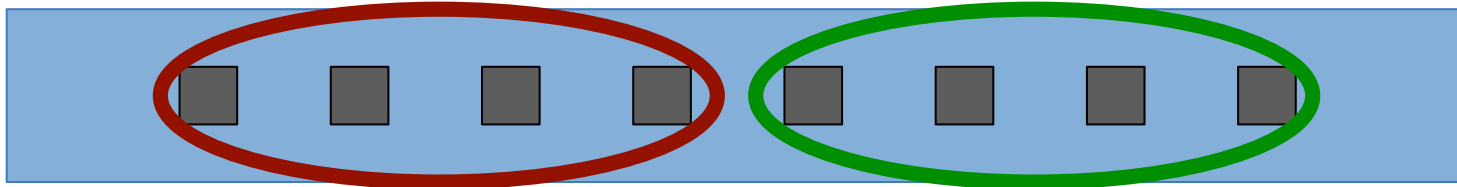

```
vlan 10,20
```

```
interface range Gi 1 - 4  
  switchport mode access  
  switchport access vlan 10
```

```
interface range Gi 5 - 8  
  switchport mode access  
  switchport access vlan 20
```


Question: how does the device behave differently after this config change?



UNIVERSITY OF OREGON



vLAN trunking

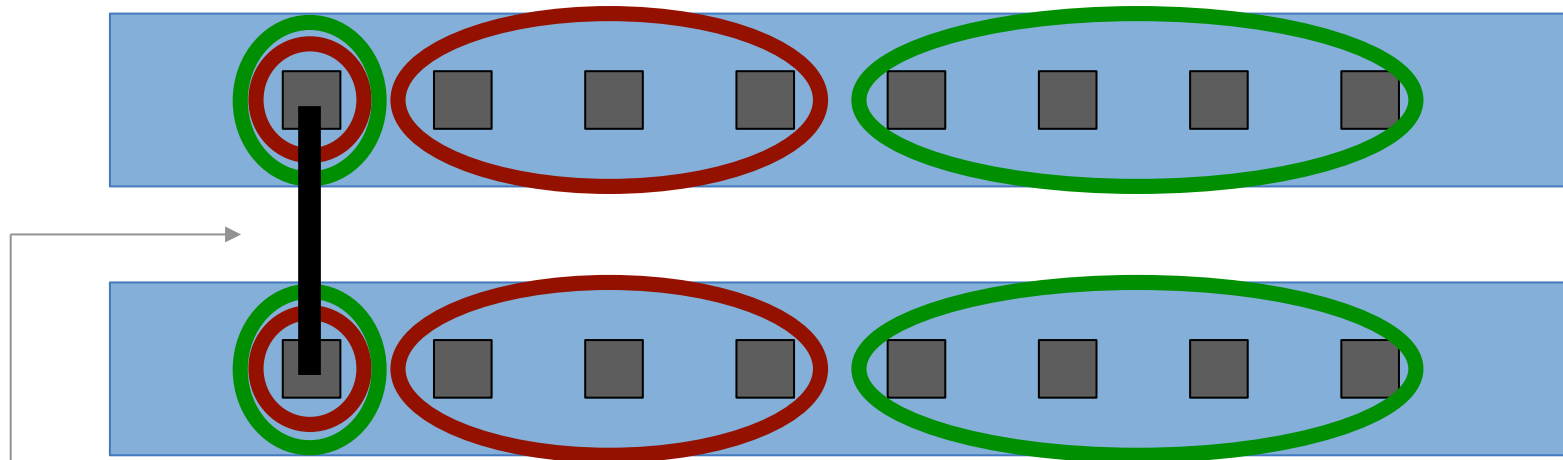

```
interface Gi 1  
  switchport mode trunk  
  switchport trunk allowed vlan 10,20
```


Question: what is different about the frames on this wire?



UNIVERSITY OF OREGON



Management IP address

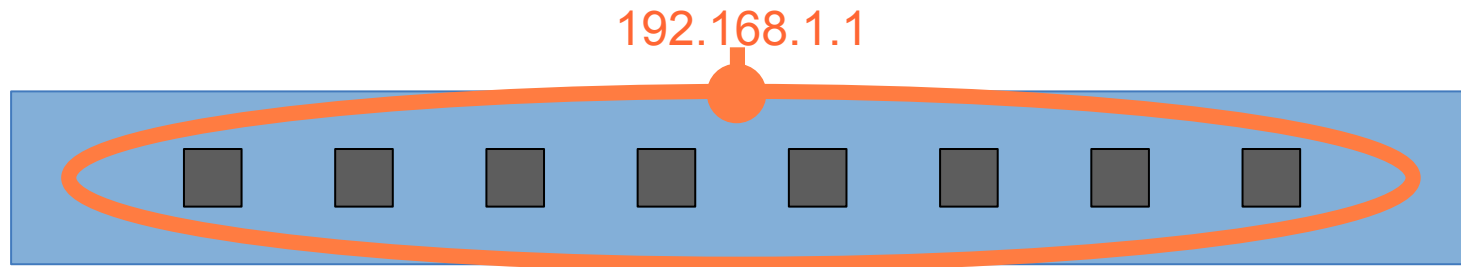

```
vlan 1
```

```
interface range Gi 1 - 8  
    switchport access vlan 1
```

```
interface Vlan1
```

```
    ip address 192.168.1.1 255.255.255.0
```

```
ip default-gateway 192.168.1.254
```

```
! or: ip route 0.0.0.0 0.0.0.0 192.168.1.254
```



UNIVERSITY OF OREGON




The Management Interface

- The switch has its own IP interface on vlan 1, with its own IP address
- Imagine the switch's CPU is plugged into vlan 1 (but without using up a physical port)
- You use this to manage the switch (ssh, snmp)
- Like any other IP device, it needs a default gateway to be able to send packets to a destination address on a different subnet

IP routing

- Extend this by giving the switch an IP address on multiple VLANs
 - Each address is of course within the IP subnet for that particular VLAN
- Enable the internal router within the switch
- It can receive datagrams on one VLAN, and resend them on another
- You have a layer 3 switch!

IP routing

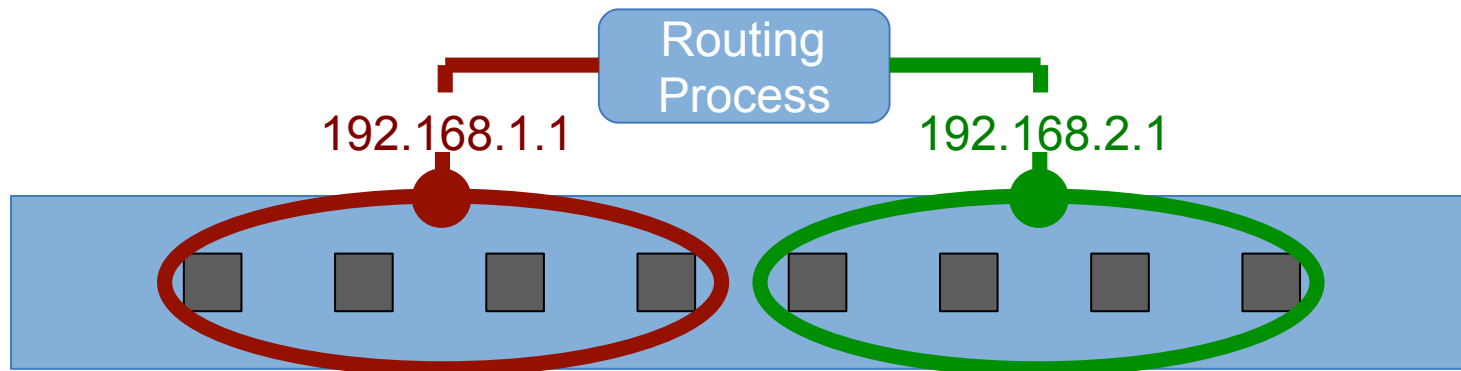

```
vlan 10,20
ip routing

interface Vlan10
  ip address 192.168.1.1 255.255.255.0
interface Vlan20
  ip address 192.168.2.1 255.255.255.0


ip route 0.0.0.0 0.0.0.0 192.168.1.254
```



Routed vLAN interfaces

- It's really that simple!
- We have an IP address on each VLAN
- Other devices can point their default gateway at us
- We will forward datagrams on their behalf
 - based on our IP forwarding table
 - connected routes, static routes etc.


Acting as a gateway

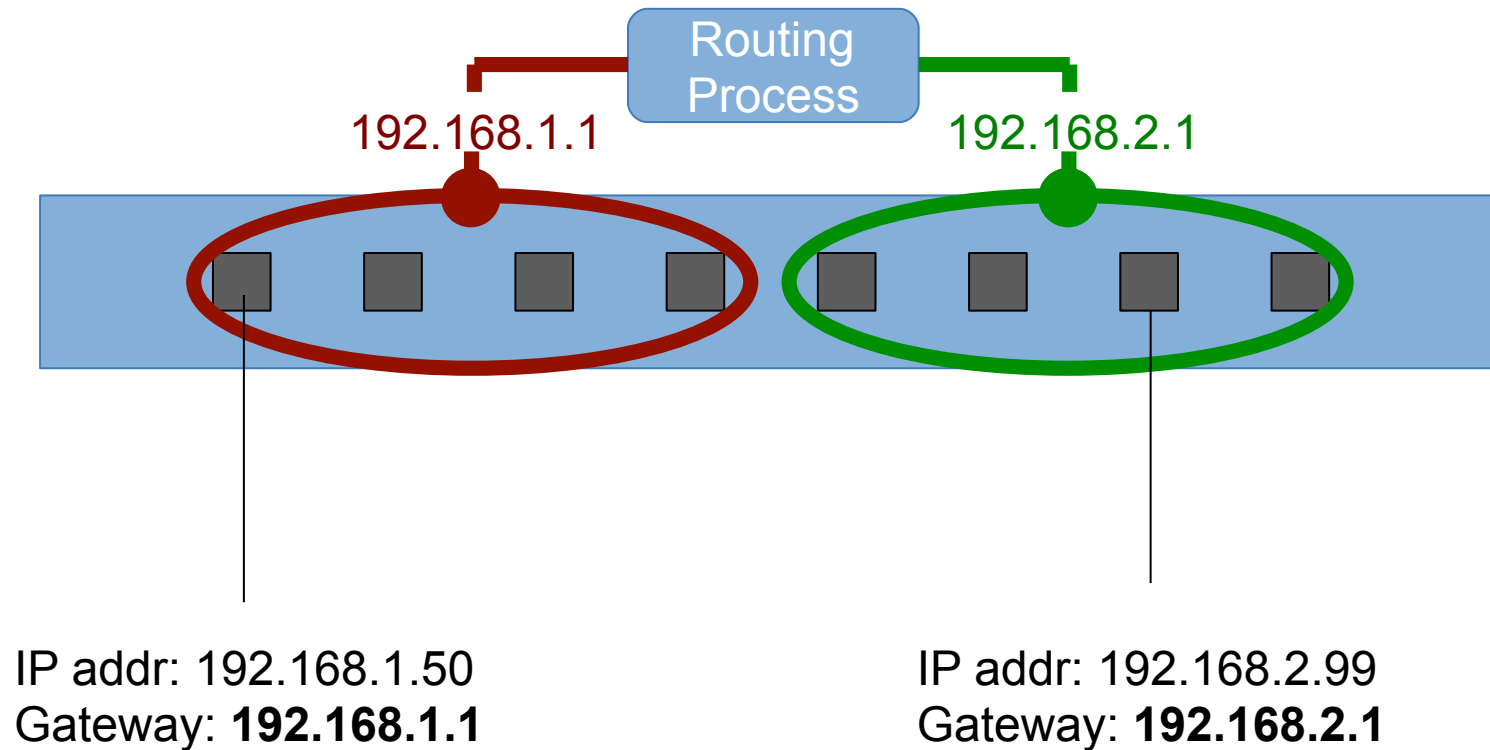

UNIVERSITY OF OREGON




IPv6 is the same

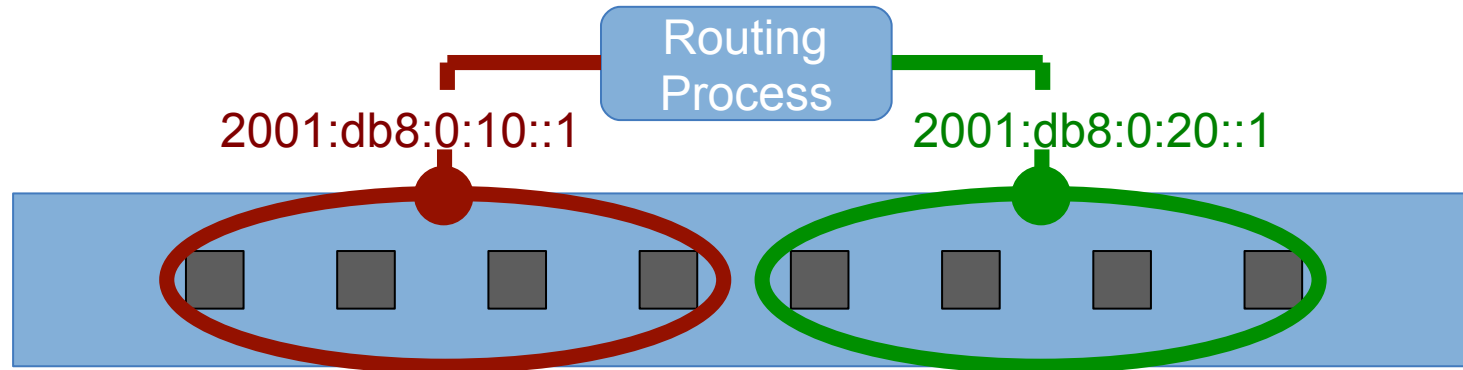

```
ipv6 unicast-routing
!
interface Vlan10
  ipv6 address 2001:db8:0:10::1/64
interface Vlan20
  ipv6 address 2001:db8:0:20::1/64
!
ipv6 route ::/0 2001:db8:0:10::ff
```



Simple campus: 1 subnet/building

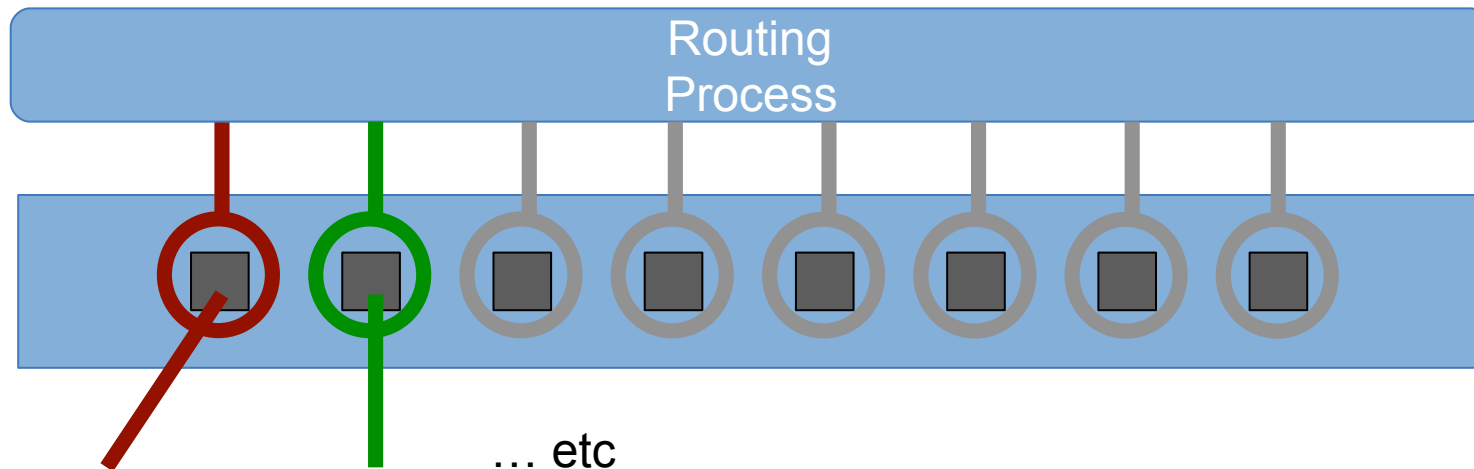

```
interface Gi1
  switchport mode access
  switchport access vlan 10

interface Vlan10
  ip address 192.168.1.1 255.255.255.0

! alternative config:
interface Gi1
  no switchport
  ip address 192.168.1.1 255.255.255.0
```

```
interface Gi2
  switchport mode access
  switchport access vlan 20

interface Vlan20
  ip address 192.168.2.1 255.255.255.0


! alternative config:
interface Gi2
  no switchport
  ip address 192.168.2.1 255.255.255.0
```



UNIVERSITY OF OREGON



Multiple subnets per building

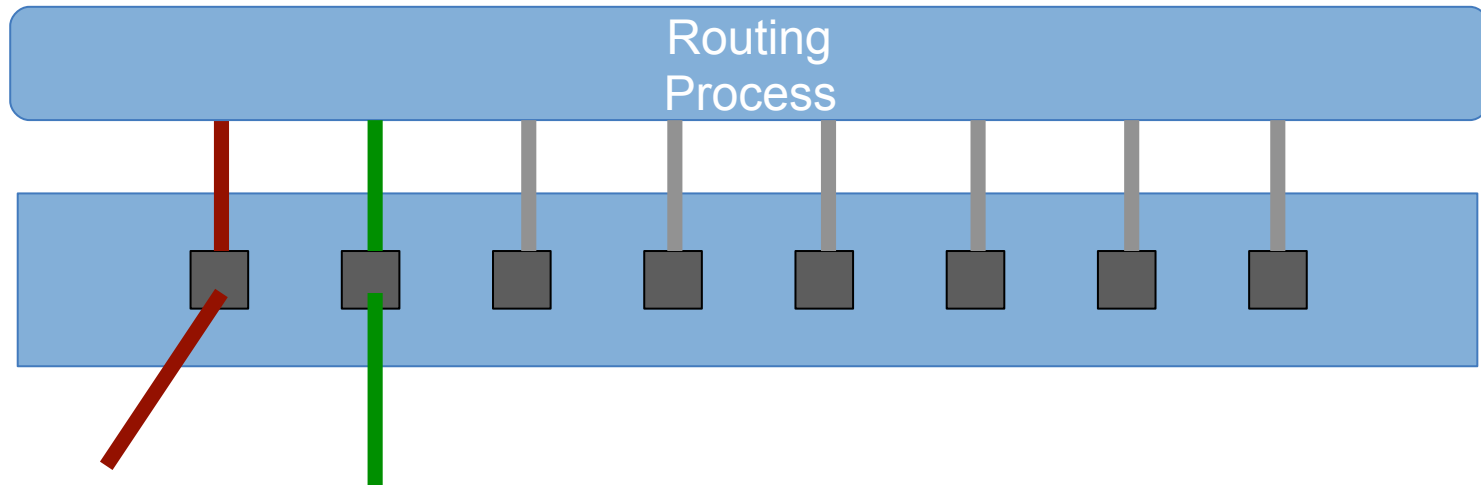

```
interface Gi1
  switchport mode trunk
  switchport trunk allowed vlan 10-12
```

```
interface Vlan10
  ip address 10.1.0.1 255.255.255.0
interface Vlan11
  ip address 10.1.1.1 255.255.255.0
interface Vlan12
  ip address 10.1.2.1 255.255.255.0
```

```
interface Gi2
  switchport mode trunk
  switchport trunk allowed vlan 20-22
```

```
interface Vlan20
  ip address 10.2.0.1 255.255.255.0
interface Vlan21
  ip address 10.2.1.1 255.255.255.0
interface Vlan22
  ip address 10.2.2.1 255.255.255.0
```



UNIVERSITY OF OREGON

Question: what has to be different at the building aggregation switch?



Hints and tips

- Remember, one subnet = one VLAN
- Don't use vlan 1
 - It's the "default vlan" and often has special default behaviour
 - It may appear by default on all ports
 - It's often hard to use with tagging
 - Better to ignore it or remove it completely
 - vLANs 2 to 4094 are usable



Hints and tips

- Don't enable the same vLAN on links to different buildings!
 - A layer 3 switch lets you do this but that doesn't mean it's a good idea. “vLAN spaghetti”
- Implies: a wired vLAN per building, a wifi vLAN per building etc
- Choose a consistent scheme
 - e.g. vlan 2-9 for NOC, vlan 10-19 for building 1, vlan 20-29 for building 2 etc.

Questions?

This document is a result of work by the Network Startup Resource Center (NSRC at <http://www.nsrc.org>). This document may be freely copied, modified, and otherwise re-used on the condition that any re-use acknowledge the NSRC as the original source.



UNIVERSITY OF OREGON

