



Network Management & Monitoring

Measuring Delay with



These materials are licensed under the Creative Commons *Attribution-Noncommercial 3.0 Unported* license
(<http://creativecommons.org/licenses/by-nc/3.0/>)

Introduction


- Based on RRDTool (the same author)
- Measures ICMP delay and can measure status of services such as HTTP, DNS, SMTP, SSH, LDAP, etc.
- Define ranges on statistics and generate alarms.
- Written in Perl for portability
- Easy to install harder to configure.

Introduction: “Marketing”

- SmokePing keeps track of your network latency:
- Best of breed latency visualization.
- Interactive graph explorer.
- Wide range of latency measurement plugins.
- Master/Slave System for distributed measurement.
- Highly configurable alerting system.
- Live Latency Charts with the most 'interesting' graphs.
- Free and OpenSource Software written in Perl written by Tobi Oetiker, the creator of MRTG and RRDtool



The “Smoke” and the “Pings”

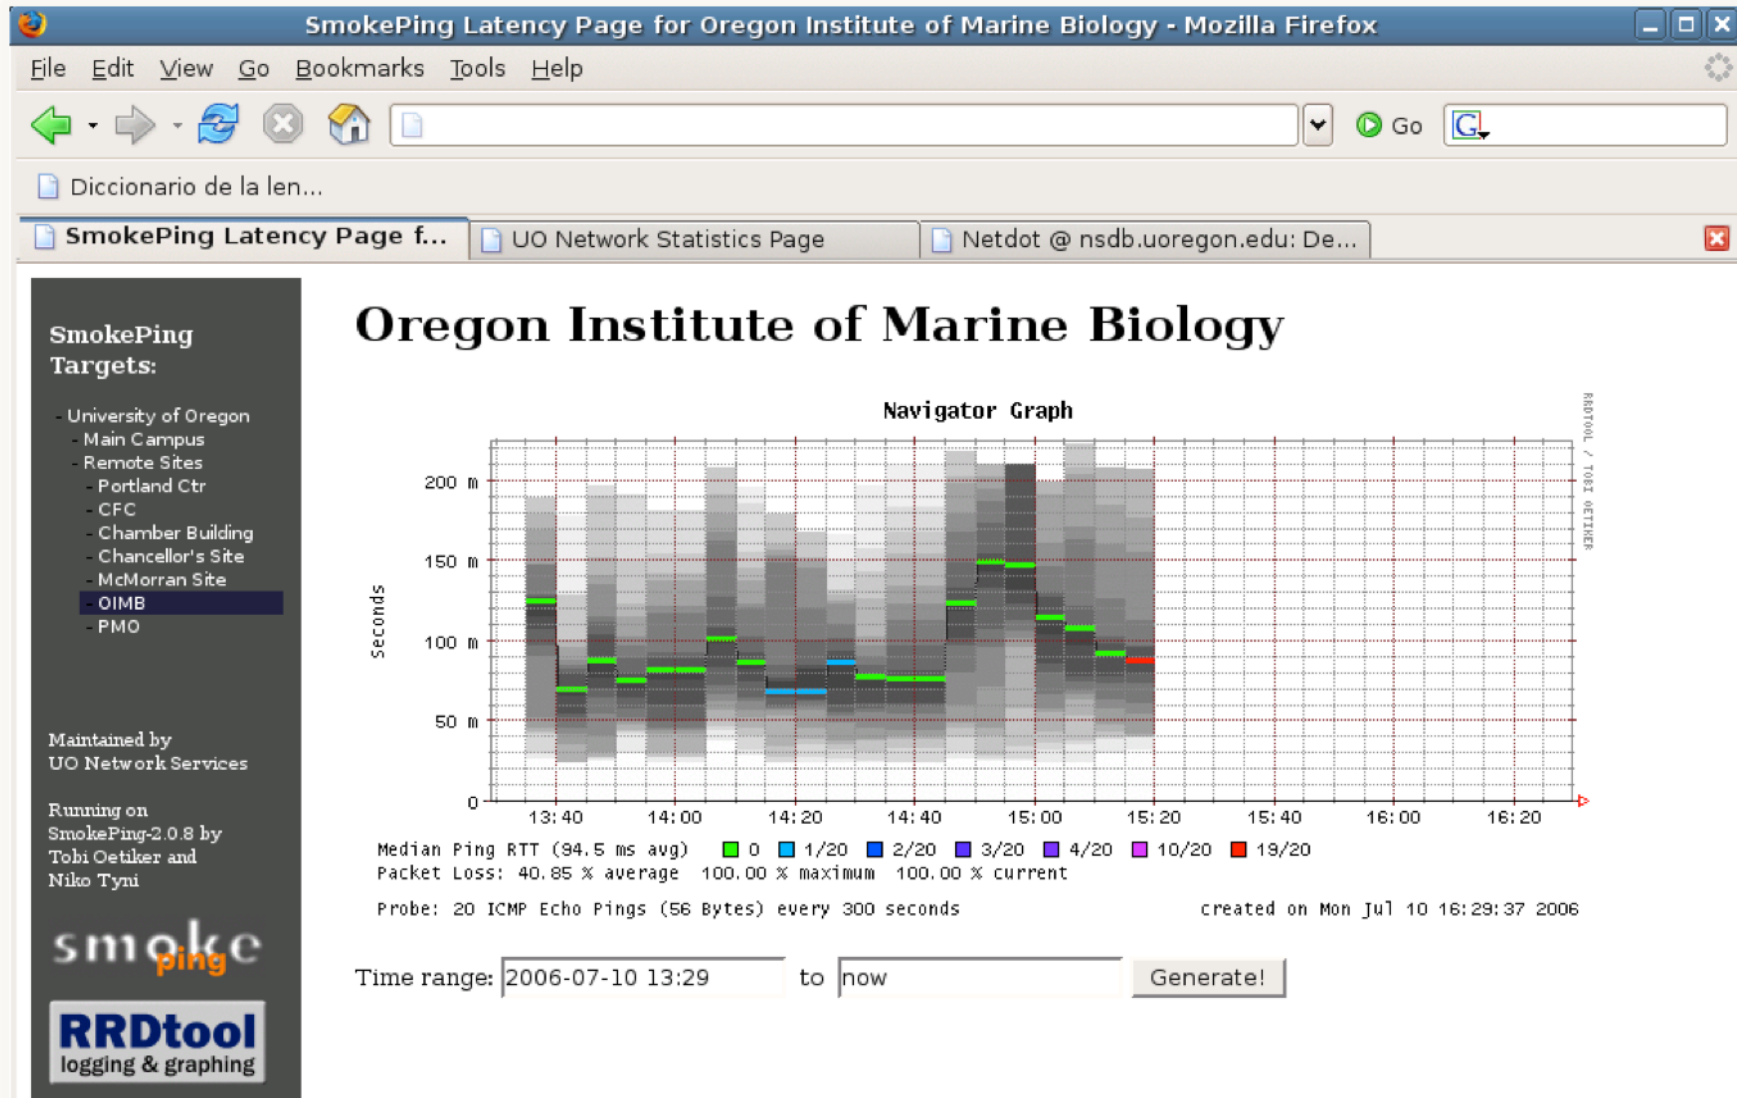


How to Read Smokeping Graphs

- Smokeping sends multiples tests (pings), makes note of RTT, orders these and selects the median.
- The different values of RTT are shown graphically as lighter and darker shades of grey (the “smoke”). This conveys the idea of variable round trip times or *jitter*.
- The number of lost packets (if any) changes the color of the horizontal line across the graph.

An Example


African Network Operators Group

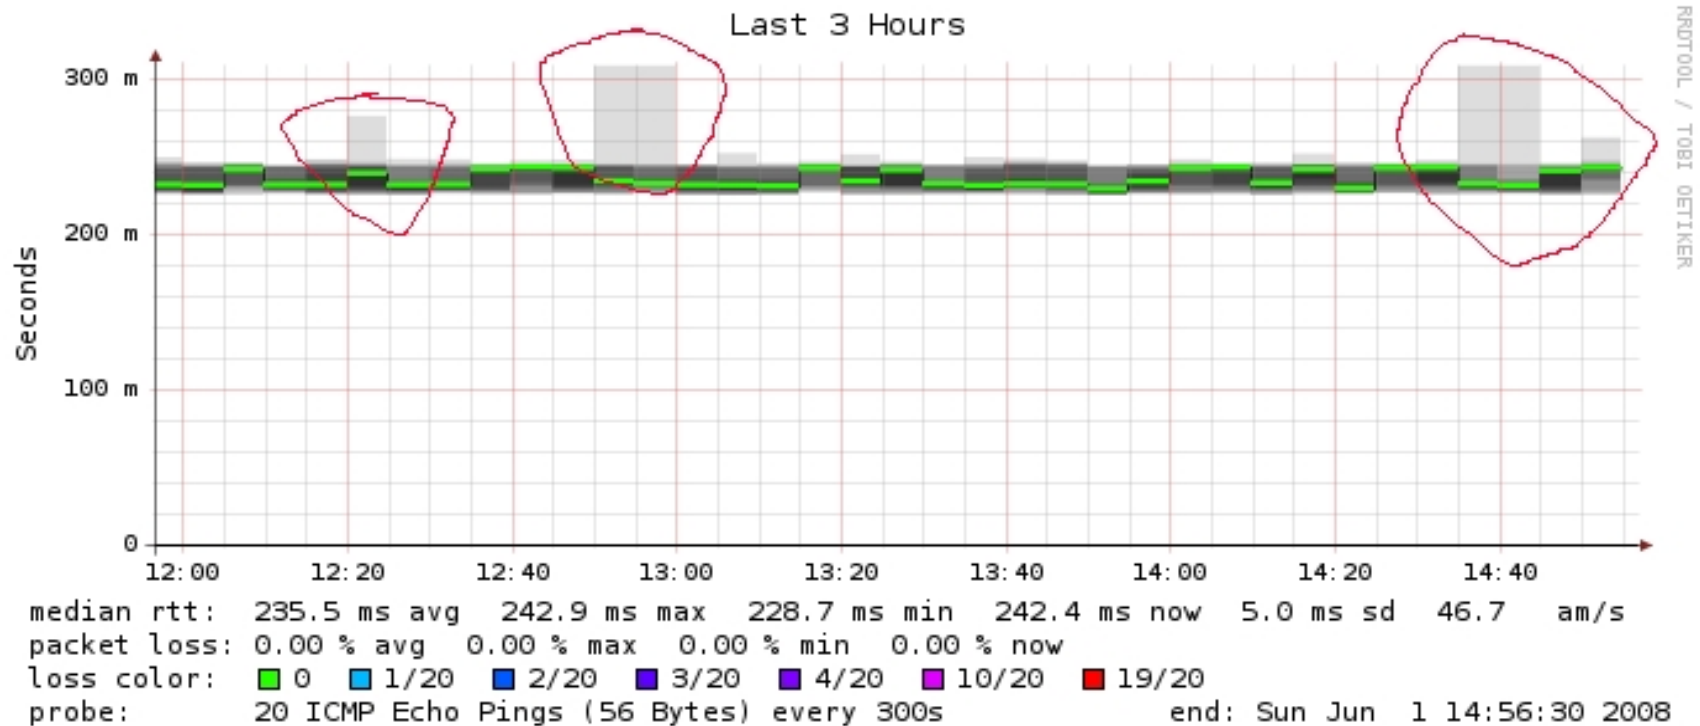

What makes it tick!

The following packages are needed or recommended:

- **rrdtool** <http://oss.oetiker.ch/rrdtool/>
- **fping** <http://www.fping.com/>
- **echoping** <http://echoping.sourceforge.net/>
- **speedyCGI** <http://www.daemoninc.com/SpeedyCGI/>
- **Apache** <http://httpd.apache.org/>
- **Perl** <http://www.perl.org/>



Smokeping: Installation

Debian/Ubuntu:

- `apt-get install smokeping`
- Configure **`/etc/smokeping/config.d/*`**
- Change Smokeping's appearance here:
 - **`/etc/smokeping/basepage.html`**
- Restart the service:
 - `service smokeping {start|stop|restart|reload}`

Smokeping Installation

You will find Smokeping running here:

<http://pcN.ws.nsrc.org/cgi-bin/smokeping.cgi>

SmokePing
Targets:

Filter:

- Charts
- Local

Maintained by
Joe Random

Running on
SmokePing-2.3.6 by
Tobi Oetiker and
Niko Tyni

smoke
ping

RRDtool
logging & graphing

Network Latency Grapher

Welcome to the SmokePing website of 'A poorly maintained site running Debian.'


SmokePing
Targets:

Filter:

Charts
- Loss
- by Max
- by Median
- Std Deviation
- Local

The most interesting destinations

Top Standard Deviation

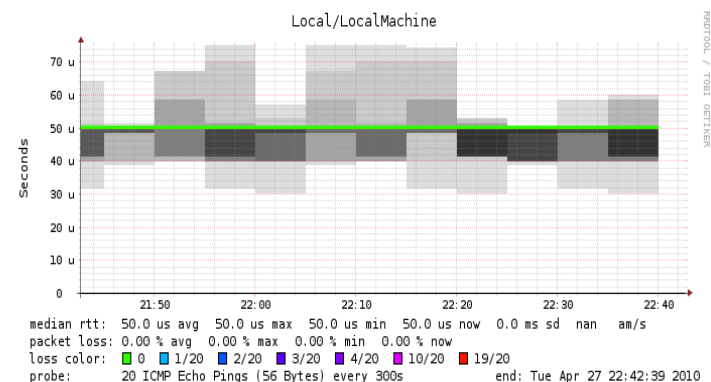

Configuration

Smokeping configuration files in Ubuntu 12.04 include:

- /etc/smokeping/config.d/**Alerts**
- /etc/smokeping/config.d/Database
- /etc/smokeping/config.d/**General**
- /etc/smokeping/config.d/pathnames
- /etc/smokeping/config.d/Presentation
- /etc/smokeping/config.d/**Probes**
- /etc/smokeping/config.d/Slaves
- /etc/smokeping/config.d/**Targets**

Generally we spend most of our time in **Alerts, General, Probes** and **Targets**.

Configuration: General

To be updated:

• owner	→	NOC
• contact	→	sysadm@localhost
• cgiurl	→	http://localhost/cgi-bin/smokeping.cgi
• mailhost	→	localhost
• syslogfacility	→	local5

```
*** General ***

owner      = NOC
contact    = sysadm@localhost
mailhost    = localhost
# NOTE: do not put the Image Cache below cgi-bin
# since all files under cgi-bin will be
# executed ... this is not
# good for images.
cgiurl      = http://localhost/cgi-bin/smokeping.cgi
# specify this to get syslog logging
syslogfacility = local5
# each probe is now run in its own process
# disable this to revert to the old behaviour
# concurrentprobes = no

@include /etc/smokeping/config.d/pathnames
```

Configuration: pathnames

Normally you should not need to update this file:

```
sendmail = /usr/sbin/sendmail  
imgcache = /var/cache/smokeping/images  
imgurl   = ../smokeping/images  
datadir  = /var/lib/smokeping  
piddir   = /var/run/smokeping  
smokemail = /etc/smokeping/smokemail  
tmail    = /etc/smokeping/tmail
```

Configuration: Presentation

- If you wish to customize Smokeping's look and feel you can edit the file `/etc/smokeping/basepage.html`
- To change how Smokeping presents graphs you can edit this file.

```
*** Presentation ***

template = /etc/smokeping/basepage.html
charset  = utf-8

+ charts

menu = Charts
title = The most interesting destinations

++ stddev
sorter = StdDev(entries=>4)
title = Top Standard Deviation
menu = Std Deviation
format = Standard Deviation %f

++ max
sorter = Max(entries=>5)
title = Top Max Roundtrip Time
menu = by Max
format = Max Roundtrip Time %f seconds
```



File continues...

Configuration: Alerts

- Very flexible. Create your own type of alert.
- Send alerts to ticket queues (RT using rt-mailgate, for instance)
- Somewhat complex to understand. Read the Alerts section of the Smokeping on-line configuration documentation:

http://oss.oetiker.ch/smokeping/doc/smokeping_config.en.html

```
*** Alerts ***  
to = root@localhost  
from = smokeping-alert@localhost  
  
+somaloss  
type = loss  
# in percent  
pattern = >0%,*12*,>0%,*12*,>0%  
comment = loss 3 times in a row over 12 samples
```



This could go to a ticketing queue instead.

Configuration: Database

- Defines how RRDtool will save data over time in Round Robin Archives (RRAs)
- By default each step is 300 seconds (5 minutes).
- You cannot trivially change the step setting once data has been collected.
- Details on each column in the Database section of the Smokeping on-line
- configuration documentation:

http://oss.oetiker.ch/smokeping/doc/smokeping_config.en.html

```
*** Database ***

step      = 300
pings     = 20

# consfn mrhb steps total

AVERAGE  0.5   1   1008
AVERAGE  0.5  12  4320
      MIN  0.5  12  4320
      MAX  0.5  12  4320
AVERAGE  0.5 144   720
      MAX  0.5 144   720
      MIN  0.5 144   720
```

consfn: Consolidation function

mrhb: Percent of consolidated steps that must be known to warrant an entry.

steps: How many steps to consolidate for each entry in the RRA.

total: Total number of rows to keep in the RRA. Use rows and steps to determine time data will be saved.

12 steps = 12 x 300 sec = 1 hour
4320 rows = 4320 hours = **180 days**

Configuration: Probes

Smokeying is installed with a number of additional probes. They must, however, be specified here – including their default behaviors.

```
*** Probes ***

+ FPing
binary = /usr/sbin/fping

+ DNS
binary = /usr/bin/dig
lookup = nsrc.org
pings = 5
step = 180

+ EchoPingHttp
binary = /usr/bin/echoping
ignore_cache = yes
pings = 5
url = /

+ EchoPingHttps
binary = /usr/bin/echoping
pings = 5
url = /

+ EchoPingSmtip
binary = /usr/bin/echoping
forks = 5
```



Use the DNS probe to verify that your services are available and responding as expected.

We use "nsrc.org" as a sample hostname to lookup, to verify that the DNS works.

Note: Initial Probes file only has FPing defined.

Configuration: Slaves

Smokeping slave servers allow for multi-viewpoint monitoring and graphing of the same services, machines or links. Details here:


http://oss.oetiker.ch/smokeping/doc/smokeping_master_slave.en.html

```
*** Slaves ***
secrets=/etc/smokeping/smokeping_secrets
#+boomer
#display_name=boomer
#color=0000ff

#+slave2
#display_name=another
#color=00ff00
```

That is, you can externally monitor your network!

Root Name Server System

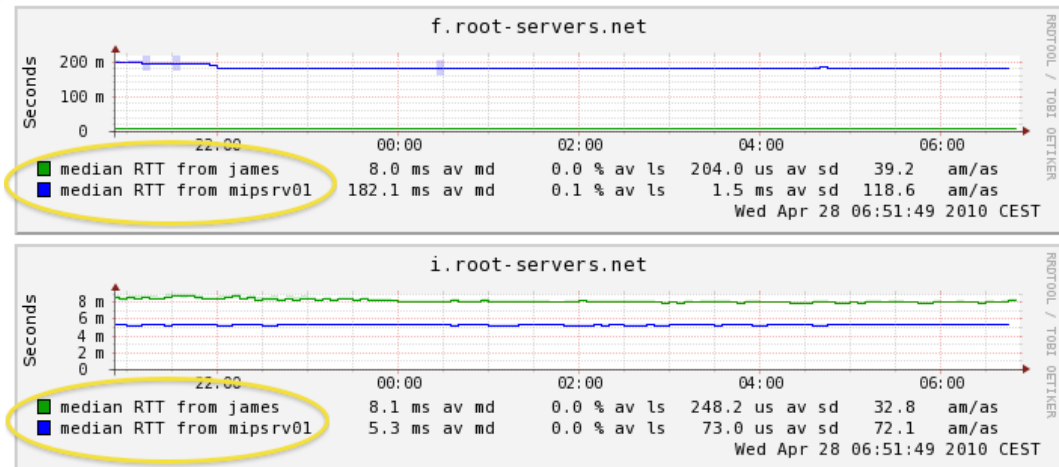

Configuration: Targets

- Where we spend most of our time configuring Smokeping.
- Web menu hierarchy defined by “+”, “++”, etc.
- Each new *probe* statement resets the default probe in use.
- Probes have defaults set in the Probes config file. These can be overridden in Targets.

```
*** Targets ***

probe = FPing

menu = Top
title = Network Latency Grapher

+ UO
menu = University of Oregon
title = UO webserver
host = www.uoregon.edu

+ NSRC
menu = NSRC
title = Network Startup Resource Center
host = www.nsrc.org

++ HTTP
menu = HTTP
probe = EchoPingHttp

+++ www
menu = NSRC web
host = www.nsrc.org

++ DNS
menu = DNS
probe = DNS

+++ dns
menu = NSRC DNS
host = www.nsrc.org
```

Configuration: Targets Example

Targets file below produces the following default SmokePing page:

```
*** Targets ***

probe = FPing

menu = Top
title = Network Latency Grapher
remark = SmokePing Latency Monitoring \
        Network Monitoring and Management Workshop

+ Local


menu = Local
title = Local Network

++ LocalMachine

menu = Local Machine
title = This host
host = localhost

++ NSRC

menu = Network Startup Resource Center
title = Latency to Network Startup Resource Center
host = nsrc.org
```

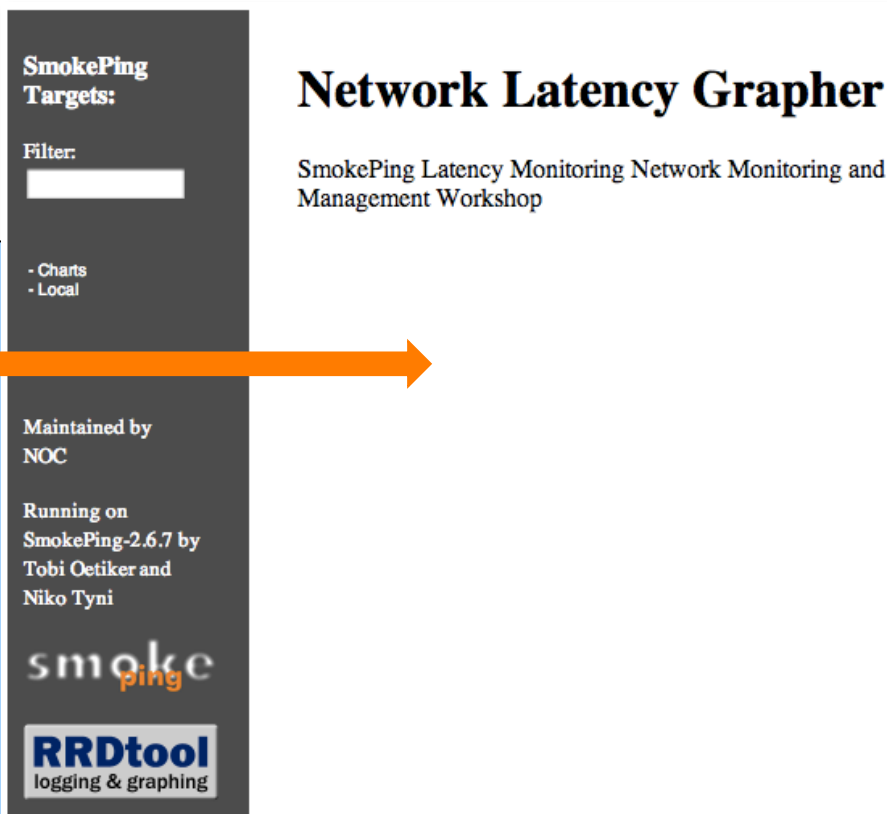A screenshot of the SmokePing Targets web interface. The page has a dark grey sidebar on the left and a white main content area. The sidebar contains the title 'SmokePing Targets:', a 'Filter:' input field, a list of links '- Charts' and '- Local', and maintenance information: 'Maintained by NOC', 'Running on SmokePing-2.6.7 by Tobi Oetiker and Niko Tyni', the 'smoke ping' logo, and the 'RRDtool logging & graphing' logo. The main content area displays the title 'Network Latency Grapher' and the subtitle 'SmokePing Latency Monitoring Network Monitoring and Management Workshop'. An orange arrow points from the configuration text on the left to the 'Local' link in the sidebar.

SmokePing Targets:

Filter:

- Charts
- Local

Maintained by
NOC

Running on
SmokePing-2.6.7 by
Tobi Oetiker and
Niko Tyni

smoke ping


RRDtool
logging & graphing

Network Latency Grapher

SmokePing Latency Monitoring Network Monitoring and Management Workshop


Configuration: Targets Example

Clicking on “Local” in the previous slide gives us:

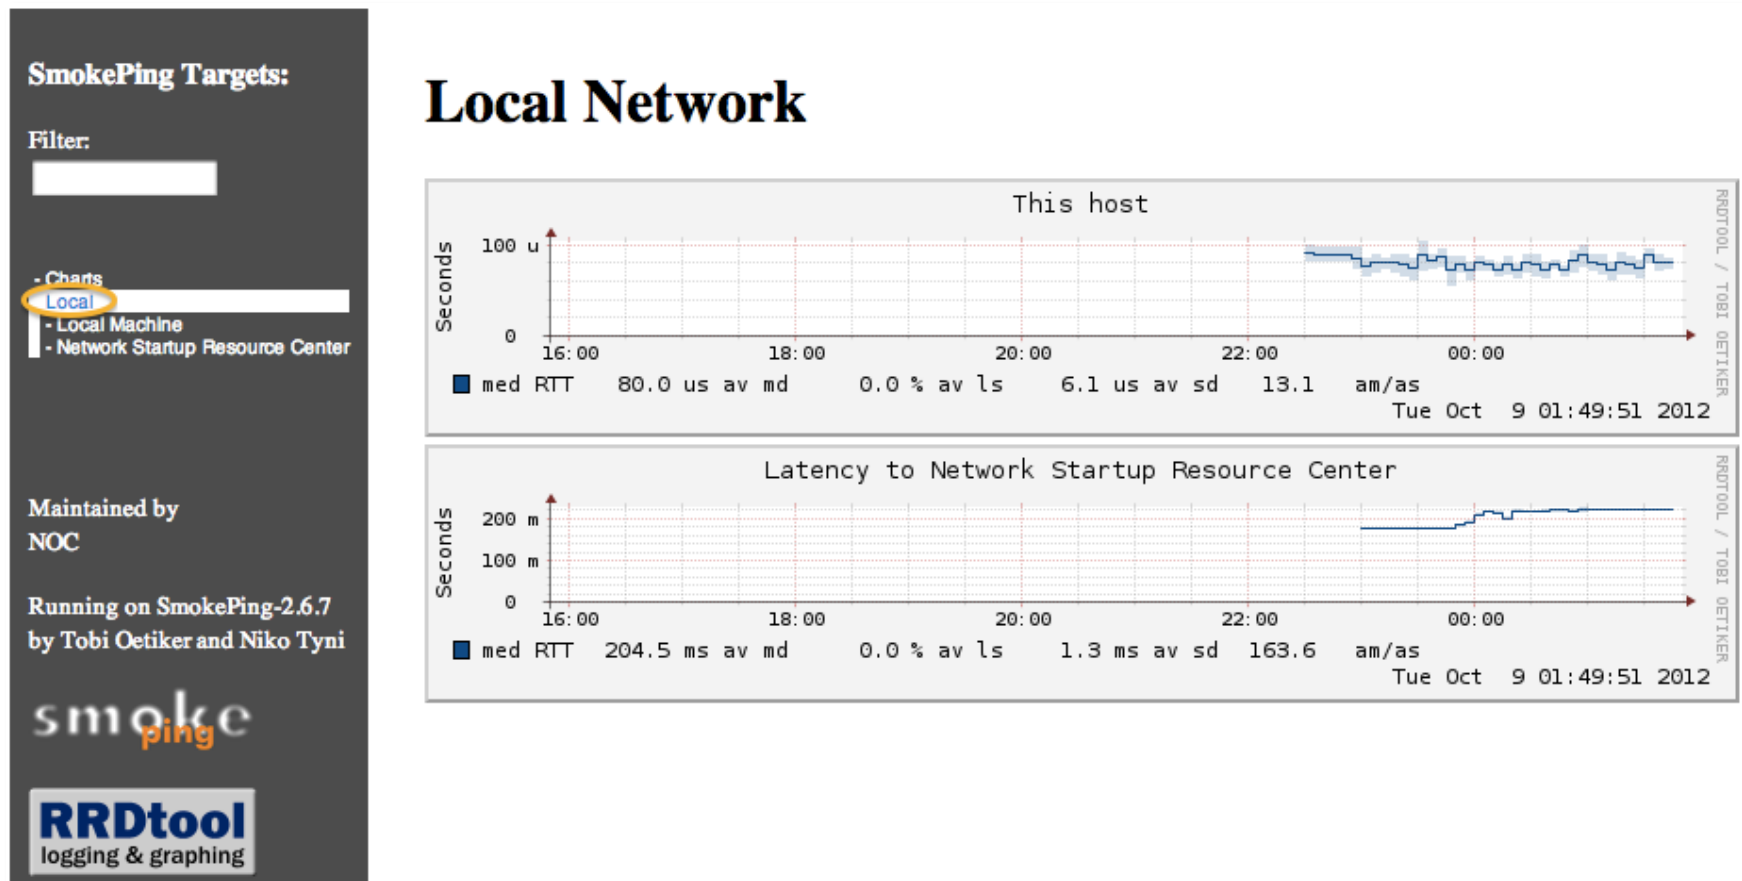

Configuration: Targets Example

Clicking “Network Startup Resource Center” in the previous slides gives us:

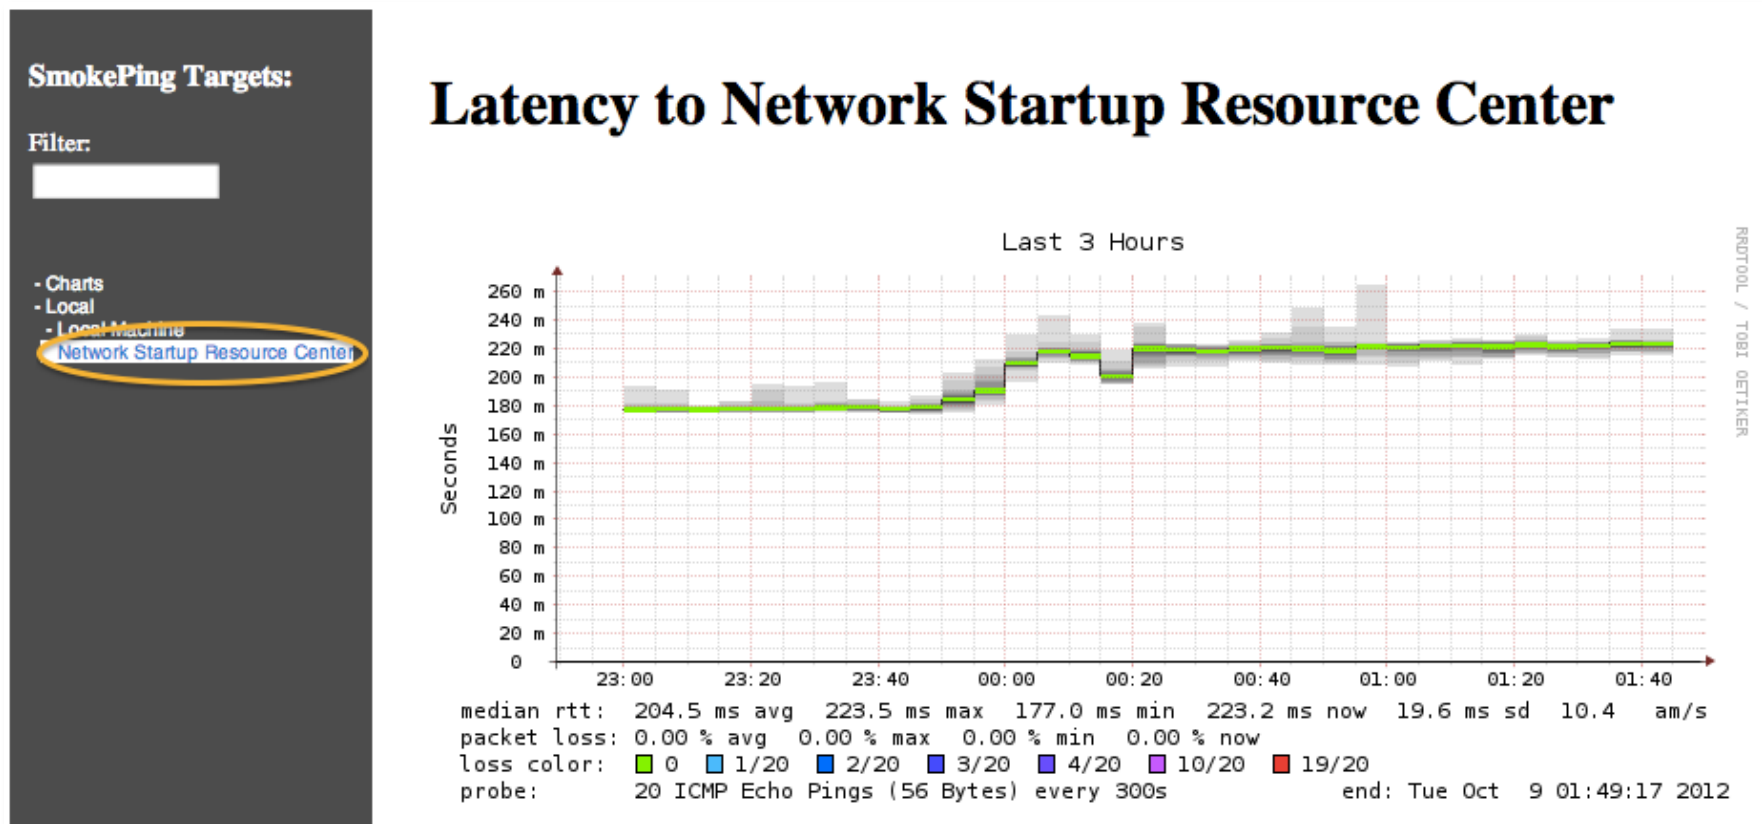

Configuration: Targets Example

Hierarchy of web interface to Targets file explained:

```
*** Targets ***
```

```
probe = FPing
```

```
menu = Top
```

```
title = Network Latency Grapher
```

```
remark = SmokePing Latency Monitor... \
        Network Monitoring and Mana...
```

```
+ Local
```

```
menu = Local
```

```
title = Local Network
```

```
++ LocalMachine
```

```
menu = Local Machine
```

```
title = This host
```

```
host = localhost
```

```
++ NSRC
```

```
menu = Network Startup Resource Center
```

```
title = Latency to Network Startup...
```


```
host = nsrc.org
```

SmokePing Targets:

Filter:

- Charts
- Local
 - Local Machine
 - Network Startup Resource Center

Latency to Network Startup Resource Center

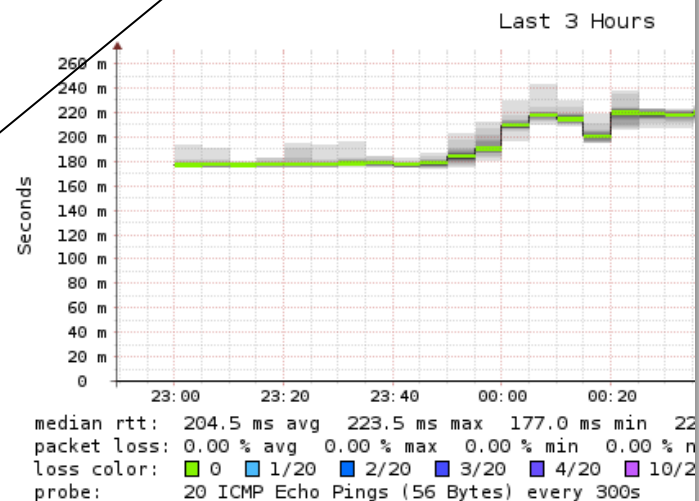

+ Local → /var/lib/smokeping/Local

++ LocalMachine → /var/lib/smokeping/Local/LocalMachine.rrd

++ NSRC → /var/lib/smokeping/Local/NSRC.rrd

Default Probe: FPing

- Probing for delay and jitter (ping)
- Performance and availability probe of a server.
- Entry belongs in the Targets file:

Latency

++ LocalMachine

menu = localhost

title = This host

host = localhost

alerts = startloss,someloss,bigloss,rttdetect

Probe: DNS Check

In /etc/smokeping/config.d/Targets:

DNS Latency

```
++ DNS
```

```
probe = DNS
```



```
menu = External DNS Check
```

```
title = DNS Latency
```

```
+++ nsrc
```

```
host = nsrc.org
```

nsrc.org

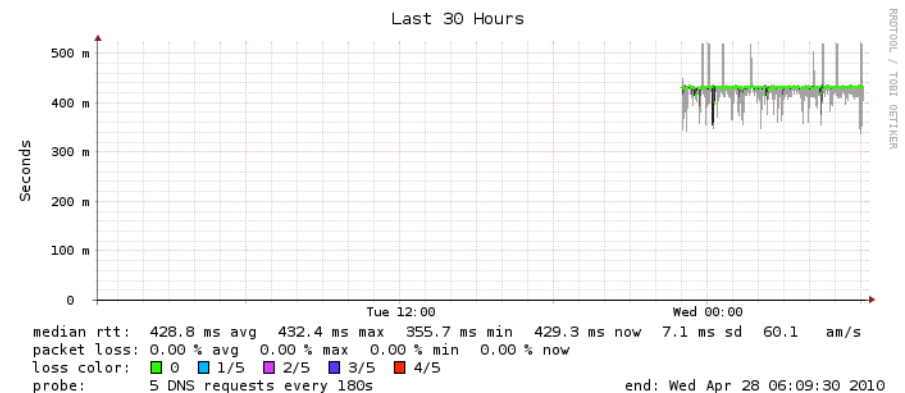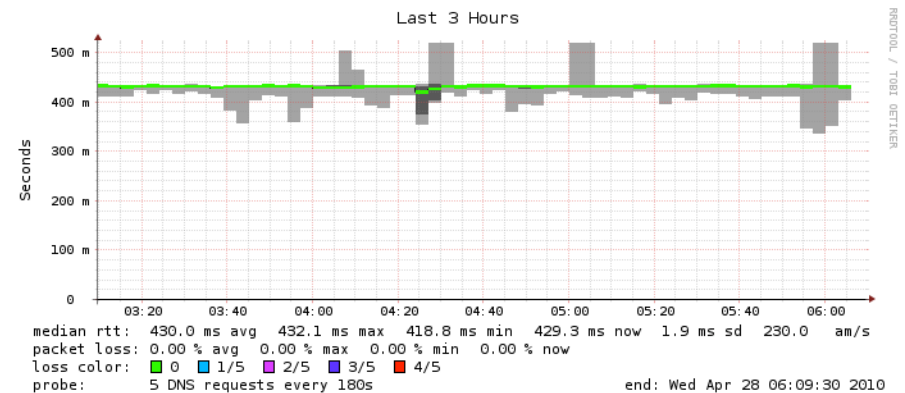


MultiHost Graphing

Solve the issue of multiple hosts, one probe and missing differences in the Y axis (time):

http://oss.oetiker.ch/smokeping/doc/smokeping_examples.en.html

Sample configuration

```
+++MultihostRouters
menu = MutihostRouters
title = Combined Router Results
host = /Local/Routers/gw-rtr /Local/Routers/rtr1
      /Local/Routers/rtr2
```

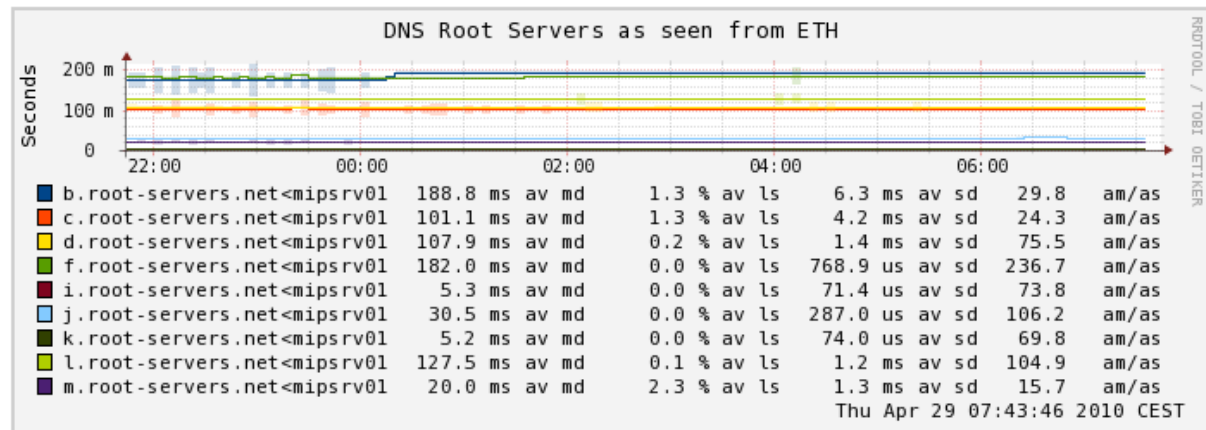


Example Multihost Graph

SmokePing
Targets:

Filter:

- Charts
- Local
- Ping Check Tutorial
- Web Check Tutorial
- Router Ping Check
- Switch Ping Check
- MultiHost Ping Row1
- MultiHost Ping Row2**
- DNS Check Tutorial

Consolidated Ping Response Time

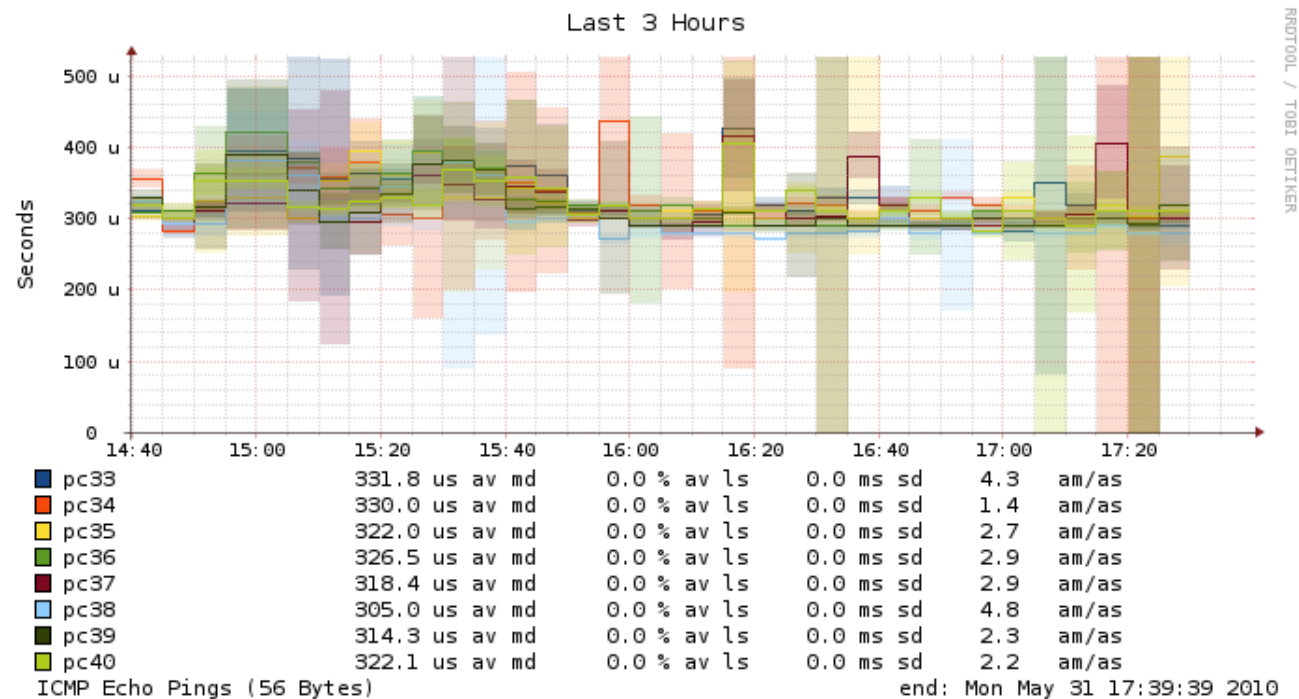

More Types of Probes

More information available here:

<http://oss.oetiker.ch/smokeping/probe/index.en.html>

A few more probes...

- DNS
- HTTP(S)
- LDAP
- Whois
- SMTP
- CiscoRTTMonDNS
- CiscoRTTMonTcpCon
- Tacacs
- WebProxyFilter
- WWW-Cache
- Radius
- IOS
- FPing6
- Etc.

Summary

- Simple but powerful network monitoring
- Monitor machines, services and link health
- Distributed instances for external views – often a paid-for service
- Easy to configure and customize, but very extensible.
- Can be used with Ticketing Systems to automate alerts
- Very small disk and CPU footprint

References

Smokeping website:

<http://oss.oetiker.ch/smokeping/>

Smokeping Demo:

<http://oss.oetiker.ch/smokeping-demo/?target=Customers.OP>

Good examples:

http://oss.oetiker.ch/smokeping/doc/smokeping_examples.en.html