



Network Management & Monitoring

Measuring Delay with



These materials are licensed under the Creative Commons *Attribution-Noncommercial 3.0 Unported* license
(<http://creativecommons.org/licenses/by-nc/3.0/>)

Introduction


- Based on RRDTool (the same author)
- Measures ICMP delay and can measure status of services such as HTTP, DNS, SMTP, SSH, LDAP, etc.
- Define ranges on statistics and generate alarms.
- Written in Perl for portability
- Easy to install - harder to configure.

Introduction: “Marketing”

- SmokePing keeps track of your network latency:
- Best of breed latency visualization.
- Interactive graph explorer.
- Wide range of latency measurement plugins.
- Master/Slave System for distributed measurement.
- Highly configurable alerting system.
- Live Latency Charts with the most 'interesting' graphs.
- Free and OpenSource Software written in Perl written by Tobi Oetiker, the creator of MRTG and RRDtool



The “Smoke” and the “Pings”

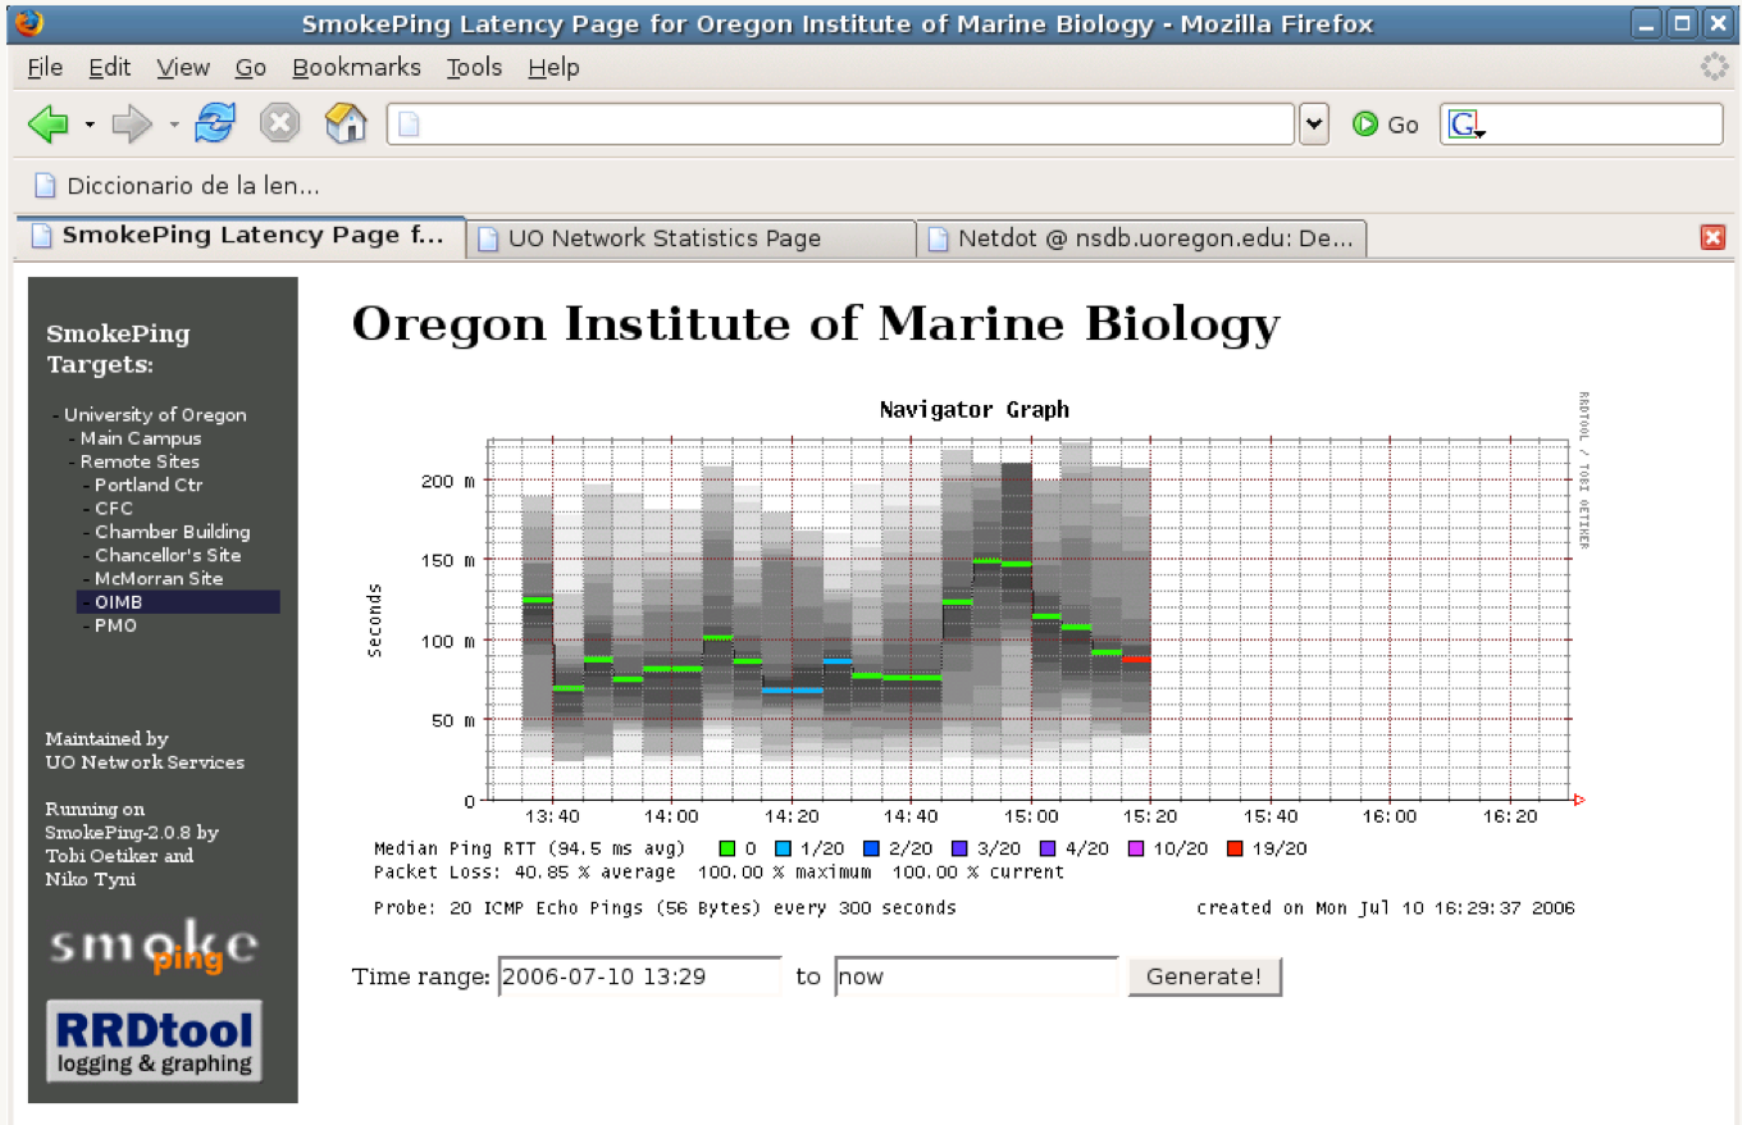


How to Read Smokeping Graphs

- Smokeping sends multiples tests (pings), makes note of RTT, orders these and selects the median.
- The different values of RTT are shown graphically as lighter and darker shades of grey (the “smoke”). This conveys the idea of variable round trip times or *jitter*.
- The number of lost packets (if any) changes the color of the horizontal line across the graph.

An Example


African Network Operators Group

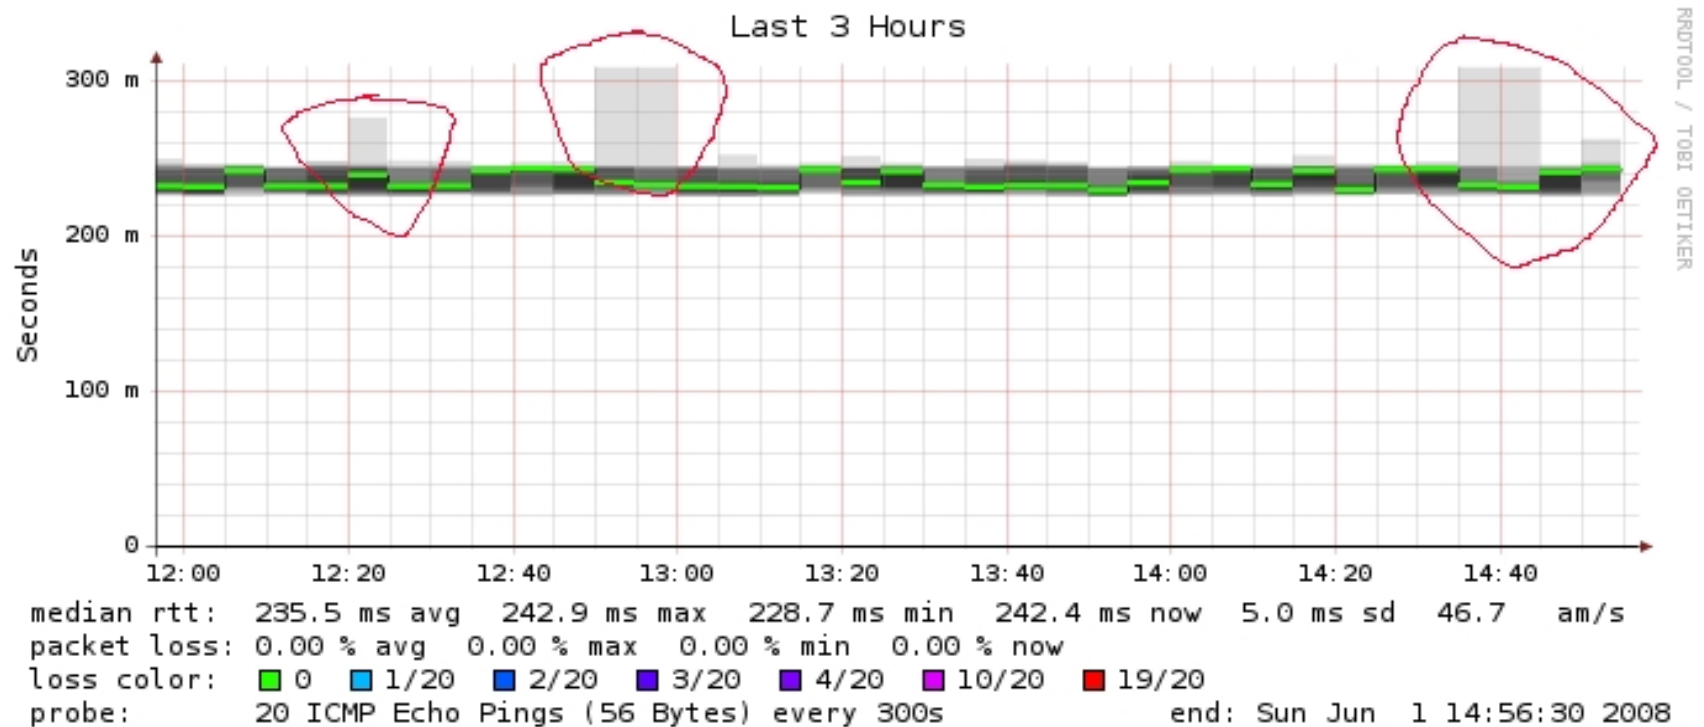

What makes it tick!

The following packages are needed or recommended:

- **rrdtool** <http://oss.oetiker.ch/rrdtool/>
- **fping** <http://www.fping.com/>
- **echoping** <http://echoping.sourceforge.net/>
- **speedyCGI** <http://www.daemoninc.com/SpeedyCGI/>
- **Apache** <http://httpd.apache.org/>
- **Perl** <http://www.perl.org/>



Smokeping: Installation

Debian/Ubuntu:

- `apt-get install smokeping`
- Configure **`/etc/smokeping/config.d/*`**
- Change Smokeping's appearance here:
 - **`/etc/smokeping/basepage.html`**
- Restart the service:
 - `service smokeping {start|stop|restart|reload}`

Smokeping Installation

You will find Smokeping running here:

<http://pcN.ws.nsrc.org/cgi-bin/smokeping.cgi>

SmokePing Targets:

Filter:

Charts

Local

Maintained by
Joe Random

Running on
SmokePing-2.3.6 by
Tobi Oetiker and
Niko Tyni

smoke ping

RRDtool
logging & graphing

Network Latency Grapher

Welcome to the SmokePing website of 'A poorly maintained site running Debian.'

SmokePing Targets:

Filter:

Charts

Loss

by Max


by Median

Std Deviation

Local

The most interesting destinations

Top Standard Deviation

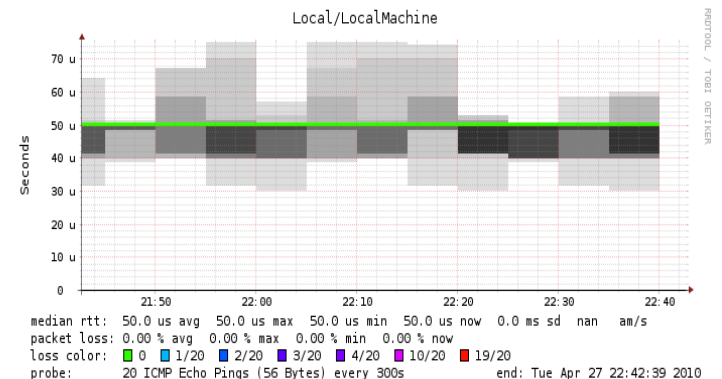

Configuration

Smokeping configuration files in Ubuntu:

```
/etc/smokeping/config.d/Alerts  
/etc/smokeping/config.d/Database  
/etc/smokeping/config.d/General  
/etc/smokeping/config.d/pathnames  
/etc/smokeping/config.d/Presentation  
/etc/smokeping/config.d/Probes  
/etc/smokeping/config.d/Slaves  
/etc/smokeping/config.d/Targets
```

Generally we spend most of our time in
Alerts, General, Probes and Targets.

Configuration: General

To be updated:

• owner	→	NOC
• contact	→	sysadm@pcN.ws.nsrc.org
• cgiurl	→	http://pcN.ws.nsrc.org/cgi-bin/smokeping.cgi
• mailhost	→	localhost
• syslogfacility	→	local5

```
*** General ***
```

```
owner      = NOC
```

```
contact    = sysadm@pcN.ws.nsrc.org
```

```
mailhost   = localhost
```

```
# NOTE: do not put the Image Cache below cgi-bin
```

```
# since all files under cgi-bin will be executed ... this is not  
# good for images.
```

```
cgiurl     = http://pcN.ws.nsrc.org/cgi-bin/smokeping.cgi
```

```
# specify this to get syslog logging
```

```
syslogfacility = local5
```

```
# each probe is now run in its own process
```

```
# disable this to revert to the old behaviour
```

```
# concurrentprobes = no
```

```
@include /etc/smokeping/config.d/pathnames
```

Configuration: Targets

- Where we spend most of our time configuring Smokeping.
- Web menu hierarchy defined by “+”, “++”, etc.
- Each new *probe* statement resets the default probe in use.
- Probes have defaults set in the Probes config file. These can be overridden in Targets.

```
*** Targets ***

probe = FPing

menu = Top
title = Network Latency Grapher

+ UO
menu = University of Oregon
title = UO webserver
host = www.uoregon.edu

+ NSRC
menu = NSRC
title = Network Startup Resource Center
host = www.nsrc.org

++ HTTP
menu = HTTP
probe = EchoPingHttp

+++ www
menu = NSRC web
host = www.nsrc.org

++ DNS
menu = DNS
probe = DNS

+++ dns
menu = NSRC DNS
host = www.nsrc.org
```

Target entry

Submenu depth (+ = top level, ++ = 2nd level, +++ = 3rd level...)

RRD filename on disk: **UO.rrd**

Must not contain spaces!

Label in left-side menu

Label at top of screen

The actual hostname
(or IP address) to test

+ UO

menu = University of Oregon

title = UO webserver

host = www.uoregon.edu

Configuration: Targets Example

Targets file below produces the following default SmokePing page:

```
*** Targets ***

probe = FPing

menu = Top
title = Network Latency Grapher
remark = SmokePing Latency Monitoring \
        Network Monitoring and Management Workshop

+ Local


menu = Local
title = Local Network

++ LocalMachine

menu = Local Machine
title = This host
host = localhost


++ NSRC

menu = Network Startup Resource Center
title = Latency to Network Startup Resource Center
host = nsrc.org
```

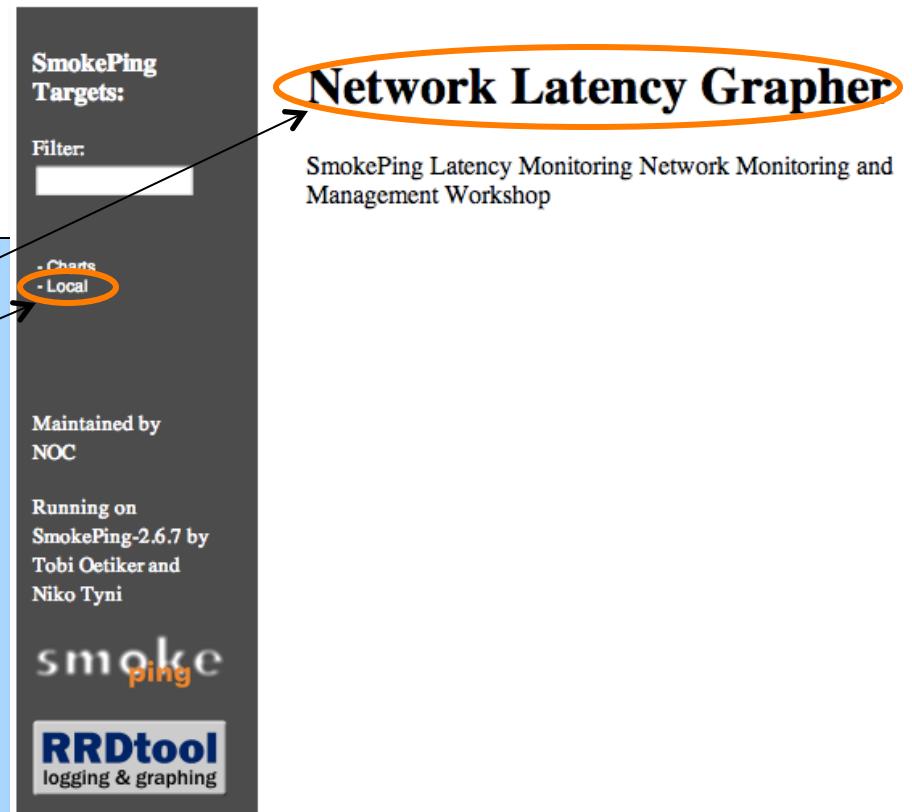


Configuration: Targets Example

Clicking on “Local” in the previous slide gives us:

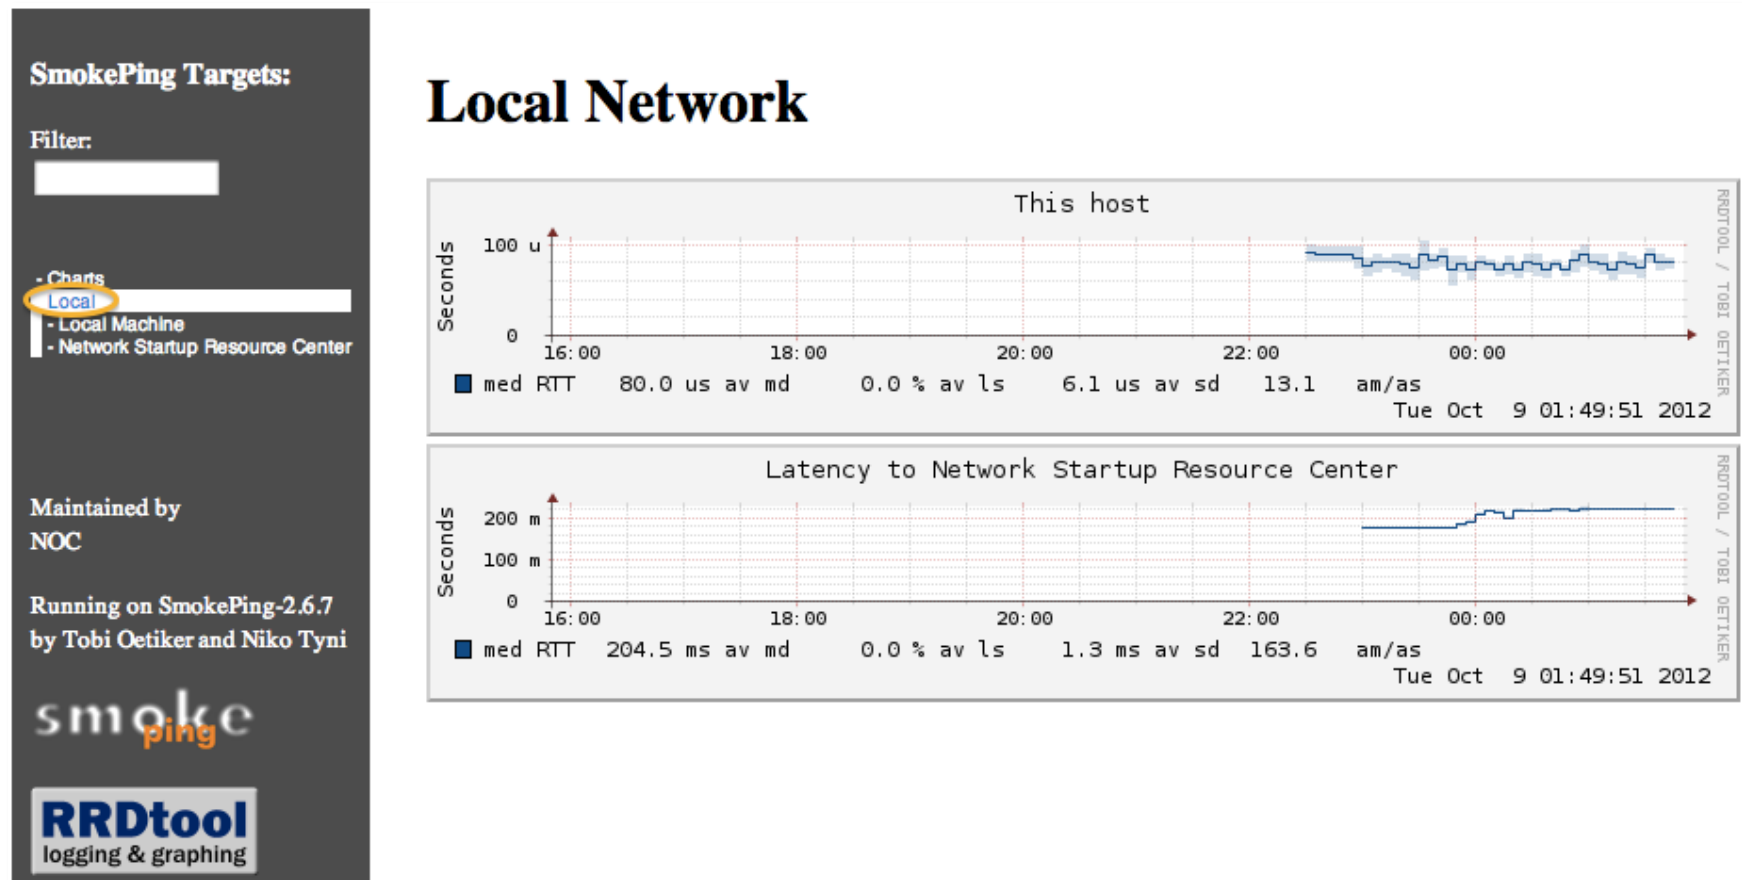

Configuration: Targets Example

Clicking “Network Startup Resource Center” in the previous slides gives us:

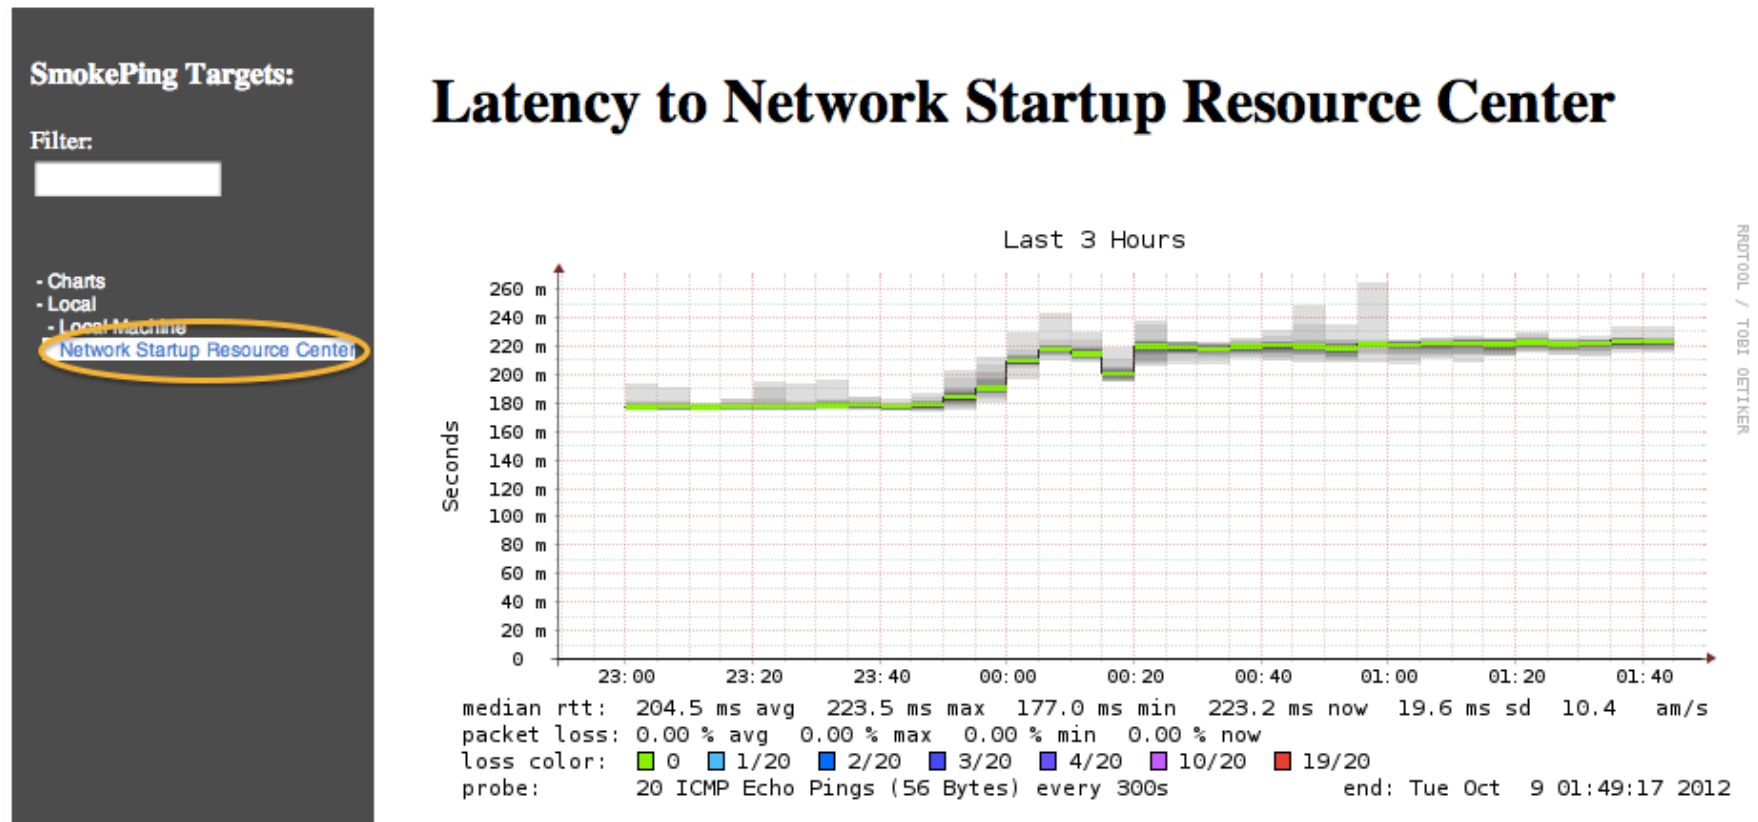

Configuration: Targets Example

How the hierarchy in the targets file is rendered in the Web UI

```
*** Targets ***
```

```
probe = FPing
```

```
menu = Top
```

```
title = Network Latency Grapher
```

```
remark = SmokePing Latency Monitor... \
        Network Monitoring and Mana...
```

```
+ Local
```

1st level

```
menu = Local
```

```
title = Local Network
```

```
++ LocalMachine
```

2nd level

```
menu = Local Machine
```

```
title = This host
```

```
host = localhost
```

2nd level

```
++ NSRC
```

```
menu = Network Startup Resource Center
```

```
title = Latency to Network Startup Re...
```


```
host = nsrc.org
```

SmokePing Targets:

Filter:

- Charts
- Local
 - Local Machine
 - Network Startup Resource Center

Latency to Network Startup Resource Center

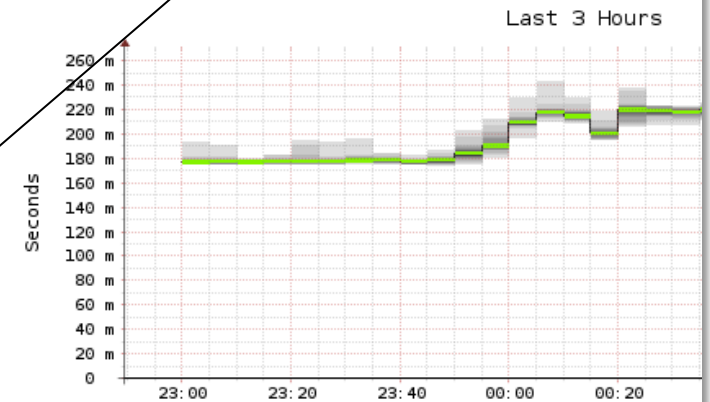

median rtt: 204.5 ms avg 223.5 ms max 177.0 ms min 22
packet loss: 0.00 % avg 0.00 % max 0.00 % min 0.00 % n
loss color: 0 1/20 2/20 3/20 4/20 10/20
probe: 20 ICMP Echo Pings (56 Bytes) every 300s

+ Local → /var/lib/smokeping/Local

++ LocalMachine → /var/lib/smokeping/Local/LocalMachine.rrd

++ NSRC → /var/lib/smokeping/Local/NSRC.rrd

Questions?

Configuration: Alerts

- Very flexible. Create your own type of alert.
- Send alerts to ticket queues (RT using rt-mailgate, for instance)
- Somewhat complex to understand. Read the Alerts section of the Smokeping on-line configuration documentation:

http://oss.oetiker.ch/smokeping/doc/smokeping_config.en.html

```
*** Alerts ***
to = root@localhost
from = smokeping-alert@localhost

+someloss
type = loss
# in percent
pattern = >0%,*12*,>0%,*12*,>0%
comment = loss 3 times in a row over 12 samples
```

This could go to a ticketing queue instead.

Target

```
++ LocalMachine
menu = localhost
title = This host
host = localhost
alerts = startloss,someloss,bigloss,rttdetect
```

Configuration: Probes

Smokeping is installed with a number of additional probes. They must, however, be specified here – including their default behaviors.

```
*** Probes ***

+ FPing
binary = /usr/sbin/fping

+ DNS
binary = /usr/bin/dig
lookup = nsrc.org
pings = 5
step = 180

+ EchoPingHttp
binary = /usr/bin/echoping
ignore_cache = yes
pings = 5
url = /

+ EchoPingHttps
binary = /usr/bin/echoping
pings = 5
url = /

+ EchoPingSntp
binary = /usr/bin/echoping
forks = 5
```



Use the DNS probe to verify that your services are available and responding as expected.

We use "nsrc.org" as a sample hostname to lookup, to verify that the DNS works.

Note: Initial Probes file only has FPing defined.

Default Probe: FPing

- Probing for delay and jitter (ping)
- Entry belongs in the Targets file

Network Latency

```
probe = FPing
```

```
...
```

```
++ LocalMachine
```

```
menu = localhost
```

```
title = This host
```

```
host = localhost
```

Probe: DNS Check

In /etc/smokeping/config.d/Targets:

DNS Latency

++ DNS

probe = DNS

menu = External DNS Check

title = DNS Latency



+++ GoogleA

menu = 8.8.8.8

Title = DNS Latency GoogleA

host = google-public-dns-a.google.com

nsrsrc.org

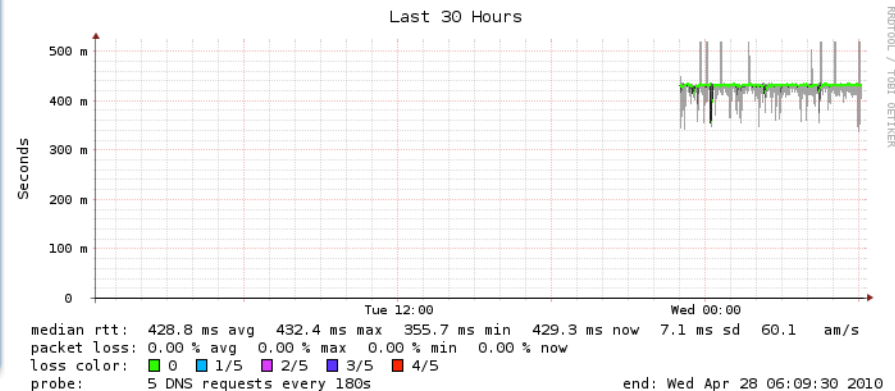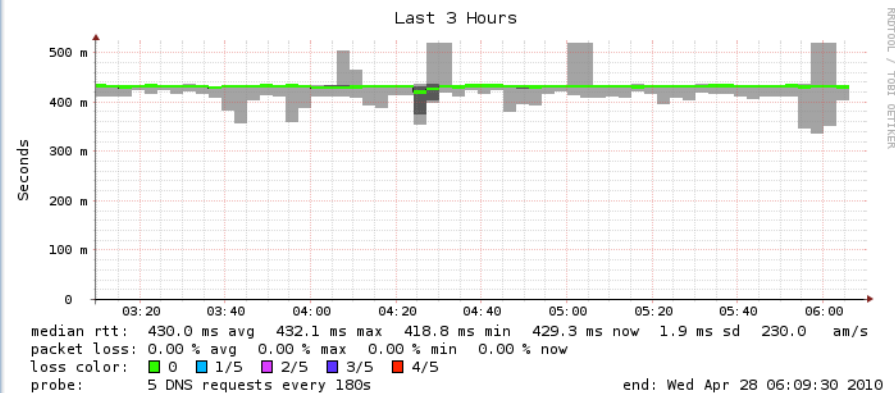

More Types of Probes

More information available here:

<http://oss.oetiker.ch/smokeping/probe/index.en.html>

A few more probes...

- DNS
- HTTP(S)
- LDAP
- Whois
- SMTP
- CiscoRTTMonDNS
- CiscoRTTMonTcpCon
- Tacacs
- WebProxyFilter
- WWW-Cache
- Radius
- IOS
- FPing6
- Etc.

Configuration: pathnames

Normally you should not need to update this file:

```
sendmail = /usr/sbin/sendmail
imgcache = /var/cache/smokeping/images
imgurl   = ../smokeping/images
datadir  = /var/lib/smokeping
piddir   = /var/run/smokeping
smokemail = /etc/smokeping/smokemail
tmail    = /etc/smokeping/tmail
```

Configuration: Presentation

- If you wish to customize Smokeping's look and feel you can edit the file `/etc/smokeping/basepage.html`
- To change how Smokeping presents graphs you can edit this file.

```
*** Presentation ***

template = /etc/smokeping/basepage.html
charset  = utf-8

+ charts

menu = Charts
title = The most interesting destinations

++ stddev
sorter = StdDev(entries=>4)
title = Top Standard Deviation
menu = Std Deviation
format = Standard Deviation %f

++ max
sorter = Max(entries=>5)
title = Top Max Roundtrip Time
menu = by Max
format = Max Roundtrip Time %f seconds
```



File continues...

Configuration: Database

- Defines how RRDtool will save data over time in Round Robin Archives (RRAs)
- By default each step is 300 seconds (5 minutes).
- You cannot trivially change the step setting once data has been collected.
- Details on each column can be found in the Database section of the Smokeping on-line configuration documentation:

http://oss.oetiker.ch/smokeping/doc/smokeping_config.en.html

```
*** Database ***
```

```
step      = 300
```

```
pings     = 20
```

```
# consfn mrhb steps total
```

```
AVERAGE 0.5 1 1008
```

```
AVERAGE 0.5 12 4320
```

```
MIN 0.5 12 4320
```

```
MAX 0.5 12 4320
```

```
AVERAGE 0.5 144 720
```

```
MAX 0.5 144 720
```

```
MIN 0.5 144 720
```

consfn: Consolidation function

mrhb: Percent of consolidated steps that must be known to warrant an entry.

steps: How many steps to consolidate for each entry in the RRA.

total: Total number of rows to keep in the RRA. Use rows and steps to determine time data will be saved.

12 steps = 12 x 300 sec = 1 hour

4320 rows = 4320 hours = **180 days**

Configuration: Slaves

Smokeping slave servers allow for multi-viewpoint monitoring and graphing of the same services, machines or links. Details here:


http://oss.oetiker.ch/smokeping/doc/smokeping_master_slave.en.html

```
*** Slaves ***
secrets=/etc/smokeping/smokeping_secrets
#+boomer
#display_name=boomer
#color=0000ff

#+slave2
#display_name=another
#color=00ff00
```

That is, you can
externally monitor
your network!

Root Name Server System

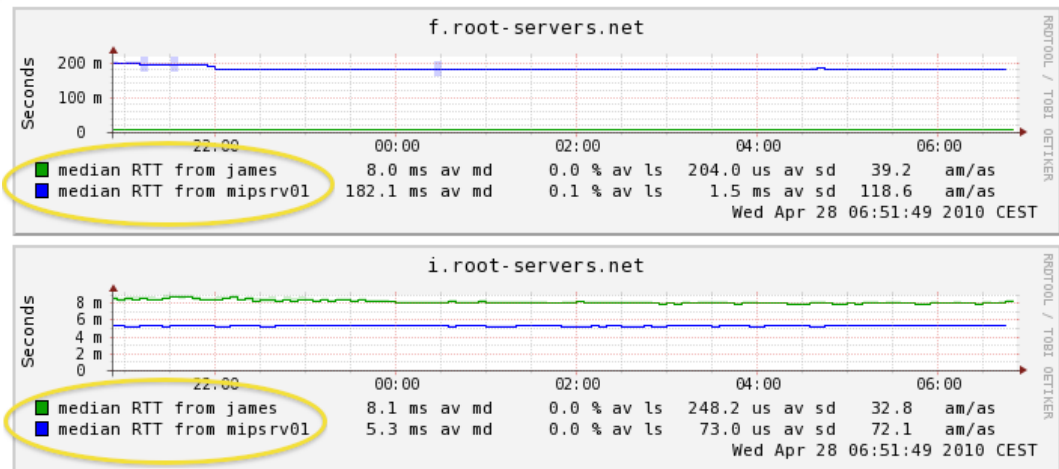


MultiHost Graphing

Solve the issue of multiple hosts, one probe and missing differences in the Y axis (time):

http://oss.oetiker.ch/smokeping/doc/smokeping_examples.en.html

Sample configuration

```
+++MultihostRouters
menu = MutihostRouters
title = Combined Router Results
host = /Local/Routers/gw /Local/Routers/rtr1
      /Local/Routers/rtr2
```

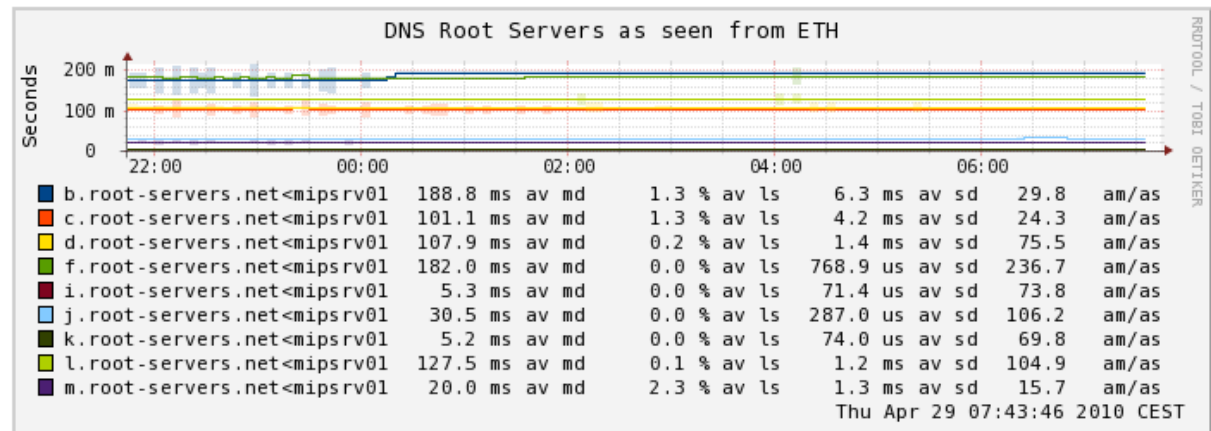


Example Multihost Graph

SmokePing
Targets:

Filter:

- Charts
- Local
- Ping Check Tutorial
- Web Check Tutorial
- Router Ping Check
- Switch Ping Check
- MultiHost Ping Row1
- MultiHost Ping Row2**
- DNS Check Tutorial

Consolidated Ping Response Time

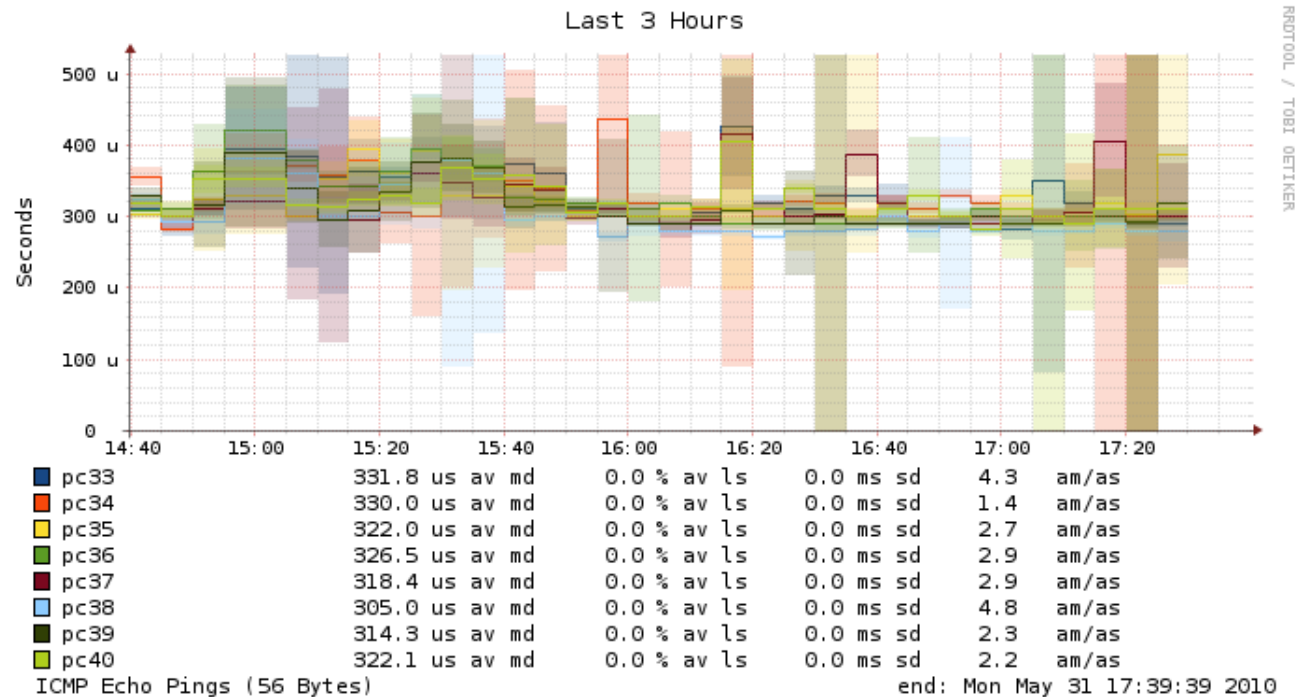

Summary

- Simple but powerful network monitoring
- Monitor machines, services and link health
- Distributed instances for external views – often a paid-for service
- Easy to configure and customize, but very extensible.
- Can be used with Ticketing Systems to automate alerts
- Very small disk and CPU footprint

References

Smokeping website:

<http://oss.oetiker.ch/smokeping/>

Smokeping Demo:

<http://oss.oetiker.ch/smokeping-demo/?target=Customers.OP>

Good examples:

http://oss.oetiker.ch/smokeping/doc/smokeping_examples.en.html