

The Value of Peering




ISP/IXP Workshops

The Internet

- ❑ Internet is made up of ISPs of all shapes and sizes
 - Some have local coverage (access providers)
 - Others can provide regional or per country coverage
 - And others are global in scale
- ❑ These ISPs interconnect their businesses
 - They don't interconnect with every other ISP (over 53600 distinct autonomous networks) – won't scale
 - They interconnect according to practical and business needs
- ❑ Some ISPs provide transit to others
 - They interconnect other ISP networks
 - Around 6400 autonomous networks provide transit

Categorising ISPs

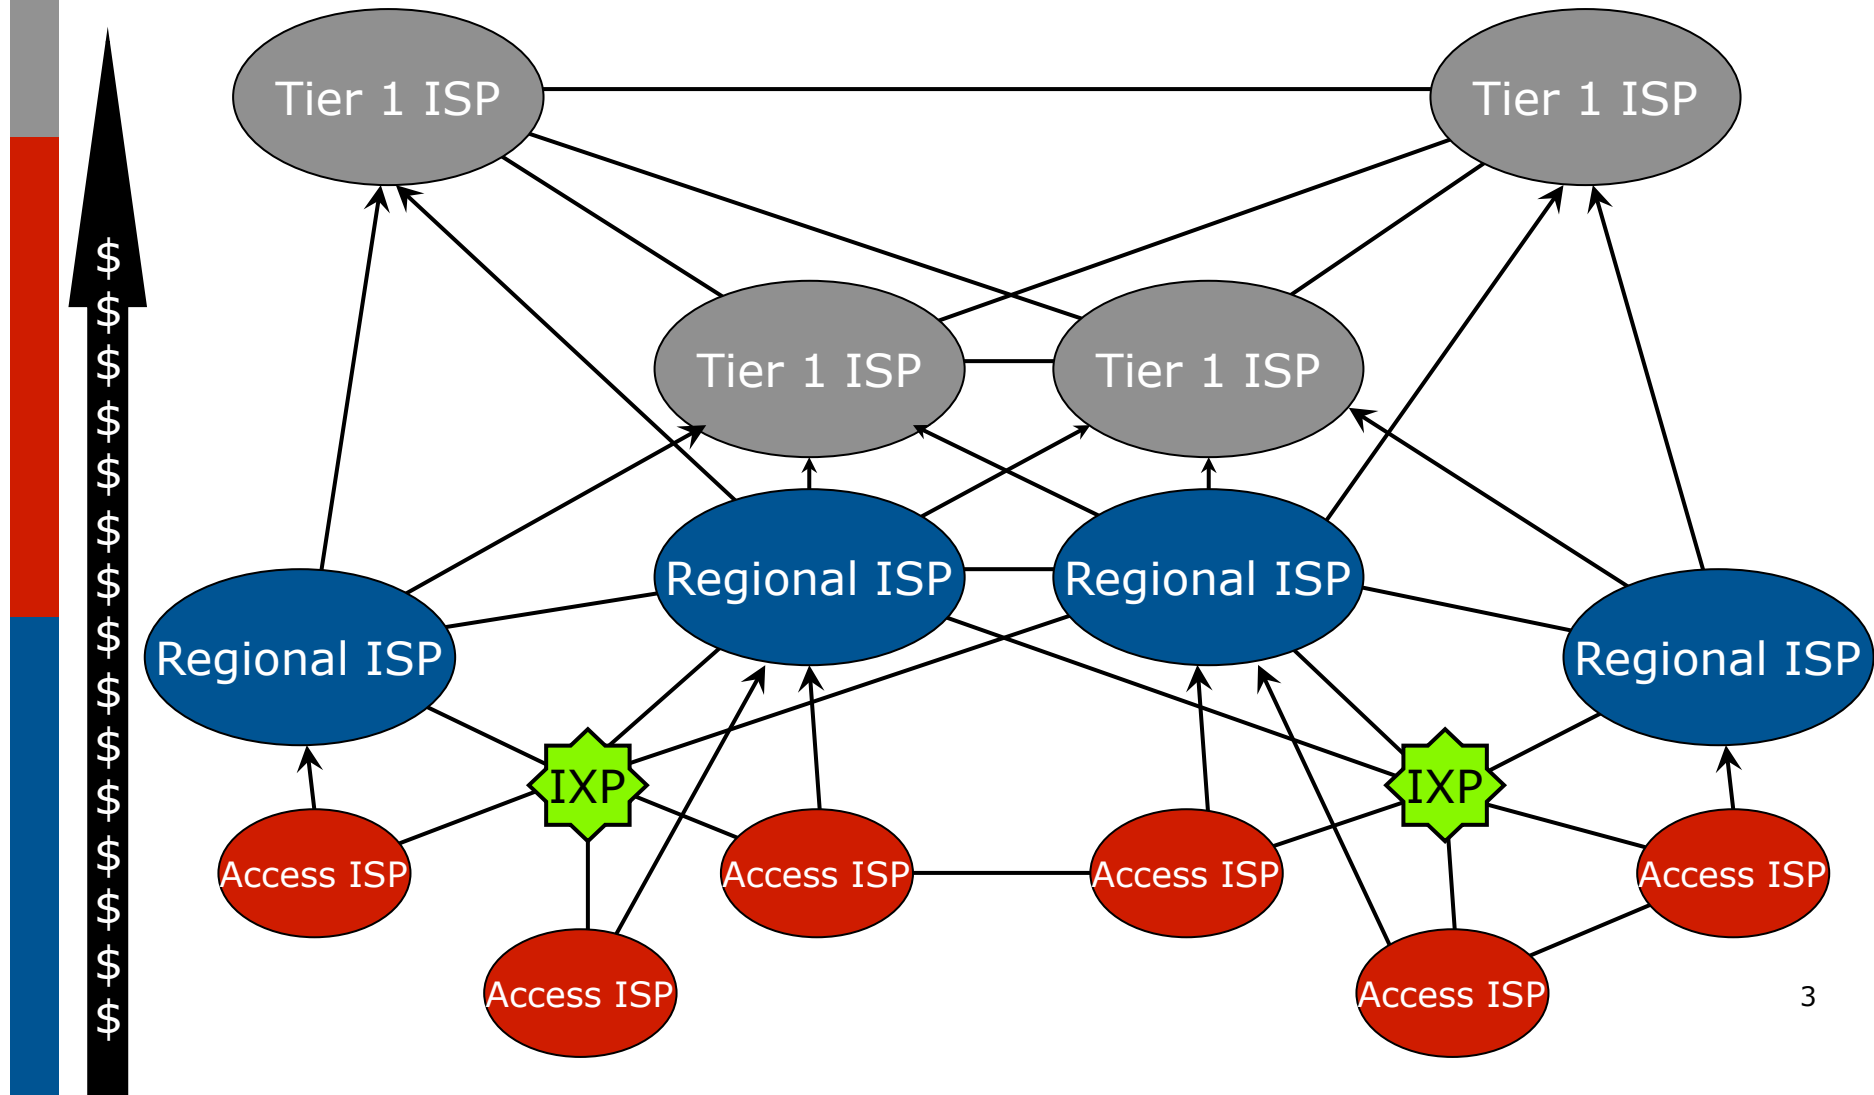

Peering and Transit

□ Transit


- Carrying traffic across a network
- Usually for a fee
- Example: Access provider connects to a regional provider

□ Peering

- Exchanging routing information and traffic
- Usually for no fee
- Sometimes called settlement free peering
- Example: Regional provider connects to another regional provider


Private Interconnect

- ❑ Two ISPs connect their networks over a **private link**
 - Can be peering arrangement
 - ❑ No charge for traffic
 - ❑ Share cost of the link
 - Can be transit arrangement
 - ❑ One ISP charges the other for traffic
 - ❑ One ISP (the customer) pays for the link

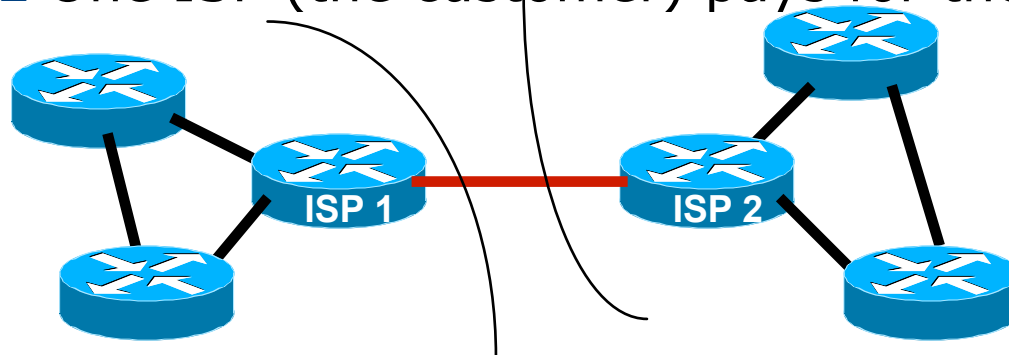

Public Interconnect

- ❑ Several ISPs meeting in a common neutral location and interconnect their networks
 - Usually is a peering arrangement between their networks

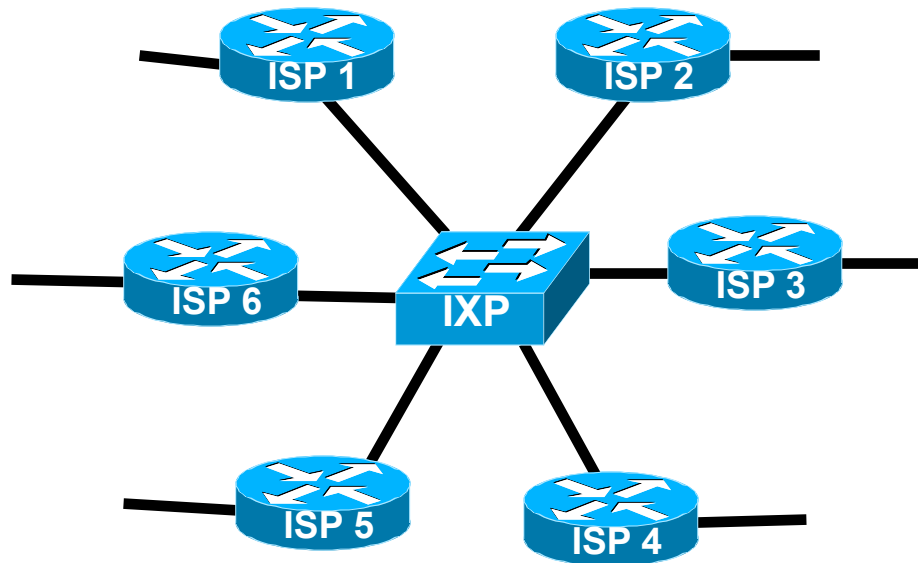

Types of Peering (1)

❑ Private Peering

- Where two network operators agree to interconnect their networks, and exchange their respective routes, for the purpose of ensuring their customers can reach each other directly over the peering link

❑ Settlement Free Peering

- No traffic charges
- **The most common form of peering**

❑ Paid Peering

- Where two operators agree to exchange traffic charges for a peering relationship

Types of Peering (2)

- ❑ Bi-lateral Peering
 - Very similar to Private Peering, but may take place at a public peering point (IXP)
- ❑ Multilateral Peering
 - Takes place at Internet Exchange Points, where operators all peer with each other via a Router Server
- ❑ Mandatory Multilateral Peering
 - Where operators are forced to peer with each other as condition of IXP membership
 - **Strongly discouraged: Has no record of success**

Types of Peering (3)

❑ Open Peering

- Where an ISP publicly states that they will peer with all parties who approach them for peering
- Commonly found at IXPs where ISP participates via the Route Server

❑ Selective Peering

- Where an ISP's peering policy depends on the nature of the operator who requests peering with them
- At IXPs, operator will not peer with RS but will only peer bilaterally

❑ Closed Peering

- Where an ISP decides who its peering partners are, and is generally not approachable to creating peering opportunities

Types of Peering (4)

- ❑ The Peering Database documents ISPs peering policies
 - <http://peeringdb.com>
- ❑ All operators of ASNs should register in the peeringdb
 - All operators who are considering peering or are peering must be in the peeringdb to enhance their peering opportunities
- ❑ Participation in peering fora is encouraged too
 - Global Peering Forum (GPF)
 - Regional Peering Fora (European, Middle Eastern, Asian, Caribbean, Latin American)

Navigation

Home Page

Logout

Your Records

Peering Record

User Account

Search Records

Networks

Exchange Points

Facilities

Common Points

Suggestions

Comments

New Exchange

New Facility

Help

FAQ

Statistics

Public Exchange Point Detailed View

Common Name

Equinix Palo Alto

Long Name

Equinix Internet Exchange Palo Alto

City

Palo Alto

Country

US

Continental Region

North America

Media Type

Ethernet

Protocols Supported

Unicast IPv4 ☒ Multicast ☒ IPv6 ☒

Contact Information

Website

https://ix.equinix.com

Traffic Statistics Website

Technical E-Mail

servicesupport@equinix.com

Technical Phone

+1-866-811-8720

Policy E-Mail

servicesupport@equinix.com

Policy Phone

IP Address Blocks

Type

Address Block

Reverse DNS Scan

IPv4 Unicast

198.32.175.0/24

Link

IPv4 Unicast

198.32.176.0/24

Link

IPv6 Unicast

2001:504:d::/64

Unsupported

IPv4 Multicast

198.32.177.0/24

Link

Local Facilities

Facility Name

City

Country

Participant Count

365 San Jose (formerly Equinix San Jose (SV7))

San Jose

US

4

Digital Realty San Francisco (200 Paul)

San Francisco

US

16

Equinix Palo Alto (SV8)

Palo Alto

US

111

Equinix Sunnyvale (SV6)

Sunnyvale

US

7

List of Peers at this Exchange Point (Total: 115)

Peer Name

Local ASN

IP Address

IPs

Policy

6connect, Inc.

8038

198.32.176.51

2

Open

AARNet

7575

198.32.176.177

2

Selective

Academia Sinica Network(ASNet)

9264

198.32.176.174

2

Open

Akamai Technologies

20940

198.32.176.127

2

Open

Amazon.com

16509

198.32.176.217

2

Open

Apple Inc

714

198.32.176.237

2

Selective

Bell Canada Backbone

577

198.32.176.94

2

Restrictive

Bharti Airtel Limited

9498

198.32.176.203

2

Selective

Biznet Networks

17451

198.32.176.60

2

Open

Black Oak Computers Inc

22781

198.32.176.153

2

Open

BlinkMind, Inc.

40739

198.32.176.121

1

Open

BroadbandONE (formerly WV Fiber)

19151

198.32.176.164

2

Selective

CDNetworks Inc.

36408

198.32.176.221

2

Open

CENIC / CalREN

2152

198.32.176.33

2

Selective

Chunghwa Telecom

9505

198.32.176.160

2

Open

CNS-KBT

9416

198.32.176.212

1

Open

CRITEO (USA)

19750

198.32.176.110

2

Selective

Dailymotion

41690

198.32.176.151

1

Open

DBolical Pty Ltd

55651

1

Open

Docomo Pacific

3605

198.32.176.100

2

Selective

Dropbox

19679

198.32.176.200

4

Open

Dynamic Network Services, Inc.

33517

198.32.176.56

2

Selective

Electronic Arts

22220

198.32.176.23

1

Open

1

2

3

4

5 of 5

Next

Last

Navigation

[Home Page](#)

[Logout](#)

Your Records

[Peering Record](#)

[User Account](#)

Search Records

[Networks](#)

[Exchange Points](#)

[Facilities](#)

[Common Points](#)

Suggestions

[Comments](#)

[New Exchange](#)

[New Facility](#)

Help

[FAQ](#)

[Statistics](#)

Company Information

Company Name

Amazon.com

Also Known As

Company Website

<http://www.amazon.com>

Primary ASN

16509

IRR Record

AS-AMAZON

Network Type

Enterprise

Approx Prefixes

1000

Traffic Levels

Not Disclosed

Traffic Ratios

Balanced

Geographic Scope

Global

Looking Glass URL

Route Server URL

The following Amazon US locations and associated IX's carry routes/traffic specific only to the services with infrastructure in that metro. For example, Jacksonville is CloudFront only, whereas Ashburn is CloudFront, EC2, S3, etc.)

- Seattle

- Palo Alto

- San Jose

- Los Angeles

- Dallas

- St Louis

- South Bend

- Jacksonville

- Miami

- Ashburn

- Vienna

- Newark

- New York

The following locations and associated IX's are part of Amazon's European Backbone, carrying routes/traffic for other AWS services (e.g. EC2, S3), Amazon retail, as well as local CloudFront caching. For each of these locations, Amazon will provide local routes/traffic for all services within that locality unless peers are able to meet in at least two diverse locations within the region, in which case, routes/traffic for all services within

Public Peering Exchange Points

Exchange Point Name	ASN	IP Address	Mbit/sec
AMS-IX	16509	80.249.210.217	60000
AMS-IX	16509	2001:7f8:1::a501:6509:2	60000
AMS-IX	16509	80.249.210.100	60000
AMS-IX	16509	2001:7f8:1::a501:6509:1	60000
AMS-IX Hong Kong	16509	103.247.139.10	10000
BBIX Tokyo	16509	218.100.6.52	10000
CoreSite - Any2 California	16509	2001:504:13::146	30000
CoreSite - Any2 California	16509	206.72.210.146	30000
DE-CIX Frankfurt	16509	80.81.195.152	80000
DE-CIX Frankfurt	16509	2001:7f8::407d:0:1	80000
DE-CIX Frankfurt	16509	80.81.194.152	80000
DE-CIX Frankfurt	16509	2001:7f8::407d:0:2	80000

1 2 3 4 5 of 9 [Next >](#) [Last >>](#)

Private Peering Facilities

Facility Name	ASN	City	Country	SONET	Ethr	ATM
365 St. Louis (formerly Equinix St Louis)	16509	St. Louis	US	☐	☒	☐
421 West Church Street	16509	Jacksonville	US	☐	☒	☐
CoreSite - LA1 - One Wilshire	16509	Los Angeles	US	☐	☒	☐
CoreSite - NY1	16509	New York	US	☐	☒	☐
Equinix Ashburn (DC1-DC11)	16509	Ashburn	US	☐	☒	☐
Equinix Dallas (DA3)	16509	Dallas	US	☐	☒	☐
Equinix Frankfurt KleyerStrasse (FR5)	16509	Frankfurt	DE	☐	☒	☐
Equinix Hong Kong (HK1)	16509	Hong Kong	HK	☐	☒	☐
Equinix Los Angeles (LA1)	16509	Los Angeles	US	☐	☒	☐
Equinix New York (111 8th)	16509	New York	US	☐	☒	☐
Equinix Newark (NY1)	16509	Newark	US	☐	☒	☐
Equinix Palo Alto (SV8)	16509	Palo Alto	US	☐	☒	☐

ISP Goals

- ❑ Minimise the cost of operating the business
- ❑ Transit
 - ISP has to pay for circuit (international or domestic)
 - ISP has to pay for data (usually per Mbps)
 - Repeat for each transit provider
 - Significant cost of being a service provider
- ❑ Peering
 - ISP shares circuit cost with peer (private) or runs circuit to public peering point (one off cost)
 - No need to pay for data
 - Reduces transit data volume, therefore reducing cost

Transit – How it works

- ❑ Small access provider provides Internet access for a city's population
 - Mixture of dial up, wireless and fixed broadband
 - Possibly some business customers
 - Possibly also some Internet cafes
- ❑ How do their customers get access to the rest of the Internet?
- ❑ ISP buys access from one, two or more larger ISPs who already have visibility of the rest of the Internet
 - This is transit – they pay for the physical connection to the upstream and for the traffic volume on the link

Peering – How it works

- ❑ If two ISPs are of equivalent sizes, they have:
 - Equivalent network infrastructure coverage
 - Equivalent customer size
 - Similar content volumes to be shared with the Internet
 - Potentially similar traffic flows to each other's networks
- ❑ This makes them good peering partners
- ❑ If they don't peer
 - They both have to pay an upstream provider for access to each other's network/customers/content
 - Upstream benefits from this arrangement, the two ISPs both have to fund the transit costs

The IXP's role

- ❑ Private peering makes sense when there are very few equivalent players
 - Connecting to one other ISP costs X
 - Connecting to two other ISPs costs 2 times X
 - Connecting to three other ISPs costs 3 times X
 - Etc... (where X is half the circuit cost plus a port cost)
- ❑ The more private peers, the greater the cost
- ❑ IXP is a more scalable solution to this problem

The IXP's role

- ❑ Connecting to an IXP
 - ISP costs: one router port, one circuit, and one router to locate at the IXP
- ❑ Some IXPs charge annual “maintenance fees”
 - The maintenance fee has potential to significantly influence the cost balance for an ISP
- ❑ Generally connecting to an IXP and peering there becomes cost effective when there are at least three other peers
 - The real \$ amount varies from region to region, IXP to IXP

Who peers at an IXP?

□ Access Providers

- Don't have to pay their regional provider transit fees for local traffic
- Keeps latency and costs for local traffic low
- 'Unlimited' bandwidth through the IXP (compared with costly and limited bandwidth through transit provider)

□ Regional Providers


- Don't have to pay their global provider transit fees for local and regional traffic
- Keeps latency and costs for local and regional traffic low
- 'Unlimited' bandwidth through the IXP (compared with costly and limited bandwidth through global provider)

Who peers at an IXP?

- ❑ Content Providers & Content Distribution Services
 - Don't have to pay their regional provider transit fees for local traffic
 - Keeps latency and costs for local traffic low
 - 'Unlimited' bandwidth through the IXP (compared with costly and limited bandwidth through transit provider)
- ❑ Root, ccTLD and gTLD operators
 - Adds to the resiliency of the global DNS system
 - Keeps latency and response time for local resolver traffic very low

The IXP's role

- ❑ Global Providers can be located close to IXPs
 - Attracted by the potential transit business available
- ❑ Advantageous for access & regional providers
 - They can peer with other similar providers at the IXP
 - And in the same facility pay for transit to their regional or global provider
 - (Not across the IXP fabric, but a separate connection)

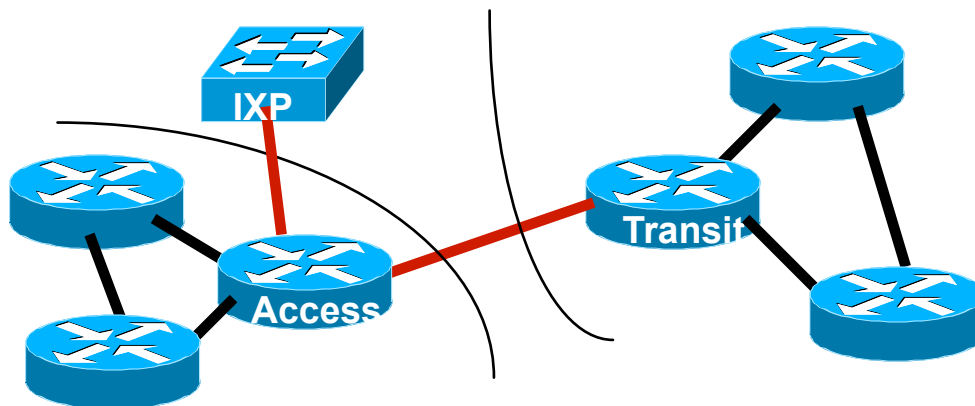

Connectivity Decisions

□ Transit

- Almost every ISP needs transit to reach rest of Internet
- One provider = no redundancy
- Two providers: ideal for traffic engineering as well as redundancy
- Three providers = better redundancy, traffic engineering gets harder
- More than three = diminishing returns, rapidly escalating costs and complexity

□ Peering

- Means low (or zero) cost access to another network
- Private or Public Peering (or both)

Transit Goals

1. **Minimise number of transit providers**
 - But maintain redundancy
 - 2 is ideal, 4 or more is hard
2. **Aggregate capacity to transit providers**
 - More aggregated capacity means better value
 - ▣ Lower cost per Mbps
 - 4x 45Mbps circuits to 4 different ISPs will almost always cost more than 2x 155Mbps circuits to 2 different ISPs
 - ▣ Yet bandwidth of latter (310Mbps) is greater than that of former (180Mbps) and is much easier to operate

Peering or Transit?

- ❑ How to choose?
- ❑ Or do both?
- ❑ It comes down to cost of going to an IXP
 - Free peering
 - Paying for transit from an ISP co-located in same facility, or perhaps close by
- ❑ Or not going to an IXP and paying for the cost of transit directly to an upstream provider
 - There is no right or wrong answer, someone has to do the arithmetic

Private or Public Peering

- ❑ Private peering
 - Scaling issue, with costs, number of providers, and infrastructure provisioning
- ❑ Public peering
 - Makes sense the more potential peers there are (more is usually greater than “two”)
- ❑ Which public peering point?
 - Local Internet Exchange Point: great for local traffic and local peers
 - Regional Internet Exchange Point: great for meeting peers outside the locality, might be cheaper than paying transit to reach the same consumer base

Local Internet Exchange Point

- ❑ Defined as a public peering point serving the local Internet industry
- ❑ Local means where it becomes cheaper to interconnect with other ISPs at a common location than it is to pay transit to another ISP to reach the same consumer base
 - Local can mean different things in different regions!

Regional Internet Exchange Point

- ❑ These are also “local” Internet Exchange Points
- ❑ But also attract regional ISPs and ISPs from outside the locality
 - Regional ISPs peer with each other
 - And show up at several of these Regional IXPs
- ❑ Local ISPs peer with ISPs from outside the locality
 - They don’t compete in each other’s markets
 - Local ISPs don’t have to pay transit costs
 - ISPs from outside the locality don’t have to pay transit costs
 - Quite often ISPs of disparate sizes and influences will happily peer – to defray transit costs

Which IXP?

- ❑ How many routes are available?
 - What is traffic to & from these destinations, and by how much will it reduce cost of transit?
- ❑ What is the cost of co-lo space?
 - If prohibitive or space not available, pointless choosing this IXP
- ❑ What is the cost of running a circuit to the location?
 - If prohibitive or competitive with transit costs, pointless choosing this IXP
- ❑ What is the cost of remote hands/assistance?
 - If no remote hands, doing maintenance is challenging and potentially costly with a serious outage

Example: South Asian ISP @ LINX

- Time: May 2013
- Data:
 - Route Server plus bilateral peering offers 70k prefixes
 - IXP traffic averages 247Mbps/45Mbps
 - Transit traffic averages 44Mbps/4Mbps
- Analysis:
 - 85% of inbound traffic comes from 70k prefixes available by peering
 - 15% of inbound traffic comes from remaining 380k prefixes from transit provider

Example: South Asian ISP @ HKIX

- Time: May 2013
- Data:
 - Route Server plus bilateral peering offers 67k prefixes
 - IXP traffic is 159Mbps/20Mbps
 - Transit traffic is 108Mbps/50Mbps
- Analysis:
 - 60% of inbound traffic comes from 67k prefixes available by peering
 - 40% of inbound traffic comes from remaining 383k prefixes from transit provider

Example: South Asian ISP

□ Summary:

- Traffic by Peering: 406Mbps/65Mbps
- Traffic by Transit: 152Mbps/54Mbps
- 73% of incoming traffic is by peering
- 55% of outbound traffic is by peering

Example: South Asian ISP

- Router at remote co-lo
 - Benefits: can select peers, easy to swap transit providers
 - Costs: co-lo space and remote hands
- Servers at remote co-lo
 - Benefits: mail filtering, content caching, etc
 - Costs: co-lo space and remote hands
- Overall advantage:
 - Can control what goes on the expensive connectivity “back to home”

Value propositions

- Peering at a local IXP
 - Reduces latency & transit costs for local traffic
 - Improves Internet quality perception
- Participating at a Regional IXP
 - A means of offsetting transit costs
- Managing connection back to home network
- Improving Internet Quality perception for customers

Summary

- Benefits of peering
 - Private
 - Internet Exchange Points
- Local versus Regional IXPs
 - Local services local traffic
 - Regional helps defray transit costs

The Value of Peering



ISP/IXP Workshops